



## Built to take the heat.

FWAFER—field-adjustable, fire-resistant wafers.


### Tested to take the heat.

All FWAFAER models have been tested to UL 263 and ASTM E119 standards for 2-hour fire resistance.



### 5 Selectable color temperatures.

These field-adjustable wafer downlights allow you to change color temperature (2700/3000/3500/4000/5000K) with the flick of a switch! They're ideal for both new construction and retrofit applications. Models are offered in 4" (11W) and 6" (15W) in both smooth and baffle trims.

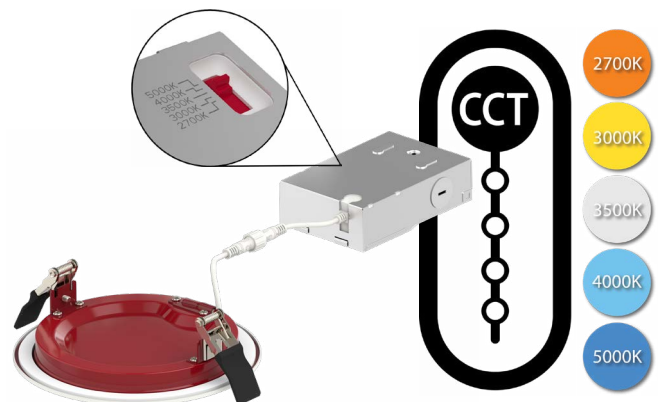



50,000 HOUR LED LIFESPAN



ENERGY STAR



JA8 COMPLIANT




CERTIFIED

CERTIFIED TO UL STANDARD 1598




5-YEAR NO COMPROMISE WARRANTY

RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty)

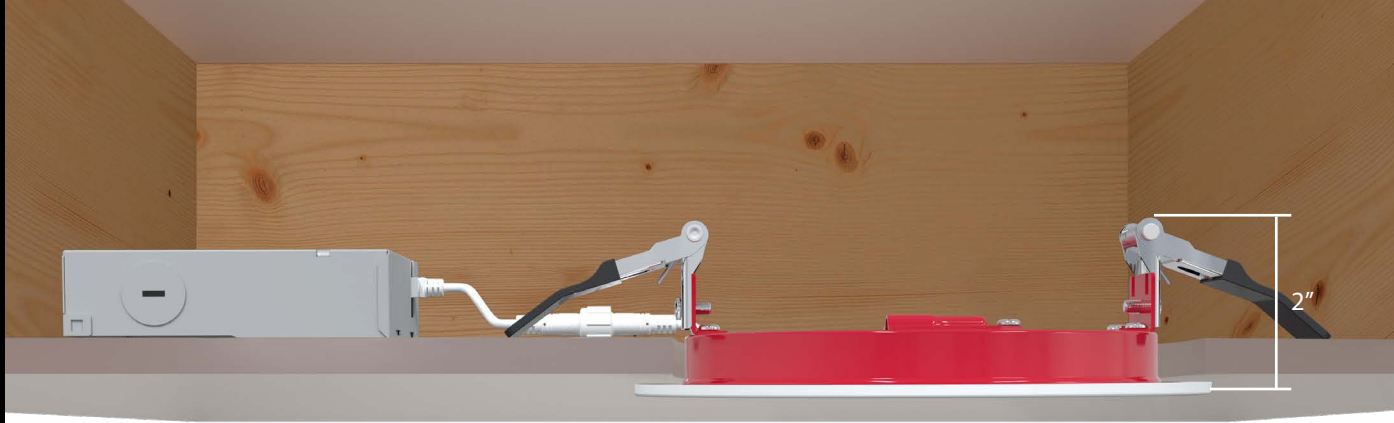

## Remote driver.

Installations are super flexible with an off-board driver that minimizes installation height, maximizes thermal management, and eliminates the need for a traditional recessed housing or “can”. A plenum-rated cable connector links the downlight module to the remote driver, and then the module snaps into place with the adjustable, spring-loaded retention clips.



REMOTE DRIVER




FT2 PLENUM RATED CABLE CONNECTOR

The remote driver box has quick connectors, knockouts and plenty of space for daisy chain wiring or adding an emergency backup unit.

## Edge-lit design minimizes glare.

Back-lit downlights deliver a more vertical distribution, putting the light directly on the work surface. Edge-lit wafers use a reflective panel to disperse a wider, smoother distribution that reduces glare.

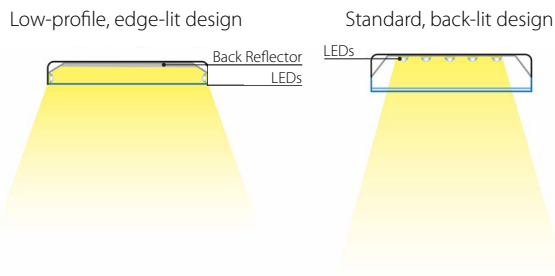

## High performance.

All wafers are dimmable—with most common TRIAC forward and reverse phase cut dimmers (120V)—and Title 24 compliant. 90 CRI provides accurate color rendering, making them ideal for commercial applications where color is critical.



90 CRI



Dimmable down to 10%

## Ordering Matrix

Product Family	Size	Shape	CRI/Color Temp	Voltage	Finish	Trim
FWAFAER	4 6	Blank Round	Blank 90CRI; 2700K/3000K/3500K/4000K/5000K Field Adjustable	Blank 120V	Blank White + Red	Blank B Smooth Baffle