

# RAB®

## FXLED



# The most flexible FlexFlood ever!

FXLED—Now with additional CCT selections.

## The most flexible FlexFlood ever.

The FXLED just got an upgrade that maximizes versatility both on the shelf and in the field:  
4 sizes, 11 wattages, 2 mounting options, and 3 CCTs.



*All sizes are compatible with both Trunnion and Slipfitter Mounts*




FEATURE PAGE



RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty)

## Optics options put the light where you need it.

Standard models come with either a 6H x 6V (XS & S) or 7H x 6V (M & L) distribution, but the medium and large models are now also available with either 3H x 3V or 5H x 5V NEMA types, giving you added flexibility with your outdoor applications!

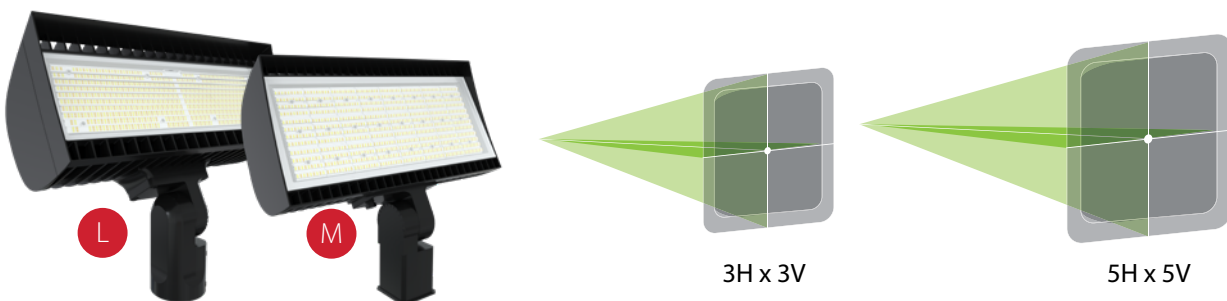

## Smaller size means smaller carbon footprint.

The new FXLED is far lighter and smaller than our original series—less than half the size! It also weighs significantly less, making it a much more sustainable, eco-friendly product. Less materials, less packaging, less energy to manufacture, less cargo space, less fuel to transport...it all adds up!



## Ultra efficient.

With a super-high efficacy of up to 152 lm/W, the FXLED can save up to 75% in energy costs.



## Stay in control.

The FXLED is available with a 7-pin receptacle that's perfect for use with RAB's standard twistlock photocell or our smart, Lightcloud-enabled twistlock photocell:

Standard Twistlock (120-277V): [R-3P-PCT](#)

Standard Twistlock (480V): [R-3P-PCT](#)

Lightcloud-Enabled Twistlock\*: [LCTWIST/K](#)

\*120-277V; requires Lightcloud Gateway or Hub



## Ordering Matrix

Product Family	Wattage		Color Temp		NEMA Type		Mounting		Finish		Driver		Options	
FXLED														
XS	80/60/40W	Blank	3000/4000/5000K*	Blank	6HX6V (XS&S)	SF	Slipfitter	Blank	Bronze	Blank	120-277V, 0-10V	Blank	No Option	
S	168/132/97/69W		CCT Adjustable		or 7HX6V (M&L)	T	Trunnion	W	White		Dimming	/7PR	7-Pin Receptacle	
M	346/213W			B33	3HX3V**					/480	480V, 0-10V			
L	534/445W			B55	5HX5V**						Dimming			

\* B33 and B55 models only have 4000/5000K selectability.

\*\* Available on M and L sizes only.