


RAB®

FXLED




When applications need tons of colorful light.

FXLED—Now with tunable RGBW.

The most flexible FlexFlood ever.

The FXLED just got an upgrade that maximizes versatility both on the shelf and in the field: 4 sizes, 11 wattages, 2 mounting options, and 3 CCTs.

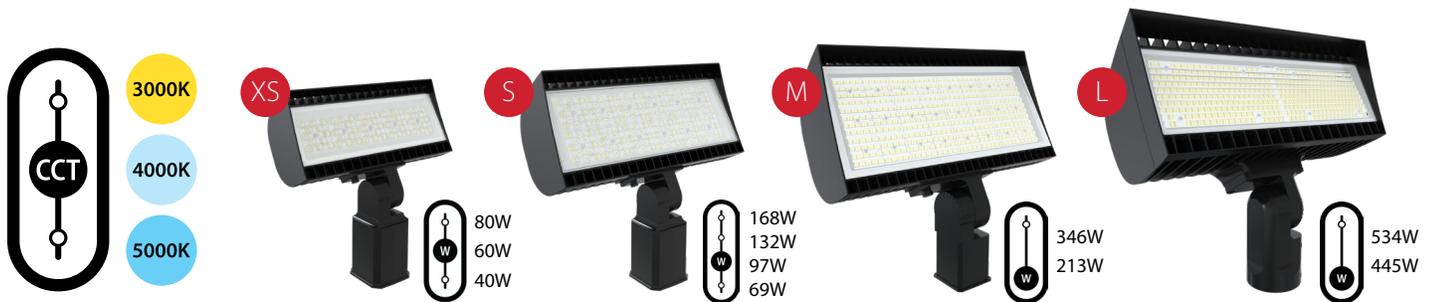

All sizes are compatible with both Trunnion and Slipfitter Mounts

Optics options put the light where you need it.

Standard models come with either a 6H x 6V (XS & S) or 7H x 6V (M & L) distribution, but the medium and large models are now also available with either 3H x 3V or 5H x 5V NEMA types, giving you added flexibility with your outdoor applications!






FEATURE PAGE



RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty

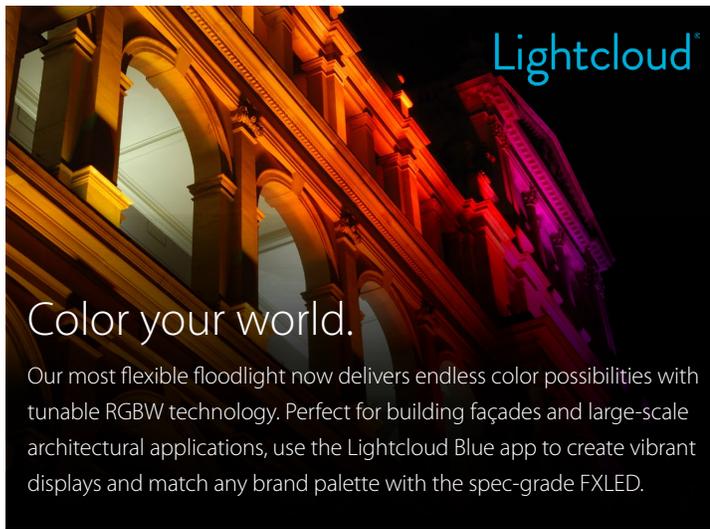

Lightcloud®

Color your world.

Our most flexible floodlight now delivers endless color possibilities with tunable RGBW technology. Perfect for building façades and large-scale architectural applications, use the Lightcloud Blue app to create vibrant displays and match any brand palette with the spec-grade FXLED.

Ultra efficient.

With a super-high efficacy of up to 152 lm/W, the FXLED can save up to 75% in energy costs.




Smaller size means smaller carbon footprint.

The new FXLED is far lighter and smaller than our original series—less than half the size! It also weighs significantly less, making it a much more sustainable, eco-friendly product. Less materials, less packaging, less energy to manufacture, less cargo space, less fuel to transport...it all adds up!



Stay in control.

The FXLED is available with a 7-pin receptacle that's perfect for use with RAB's standard twistlock photocell or our smart, Lightcloud-enabled twistlock photocell:

Standard Twistlock (120-277V): **R-3P-PCT**
 Standard Twistlock (480V): **R-3P-PCT**
 Lightcloud-Enabled Twistlock*: **LCTWIST/K**

**120-277V; requires Lightcloud Gateway or Hub*



Ordering Matrix

Family	Size / Selectable Wattage	Color Temperature	NEMA Type	Mounting	Finish	Driver**	Controls
FXLED							
XS	80/60/40W	Blank 3000/4000/5000K CCT Adjustable	Blank 6H x 6V (XS & S) ¹ or 7H x 6V (M & L) ²	SF Slipfitter Trunnion	Blank Bronze	Blank 120-277V, 0-10V Dimming	Blank No Option
S	168/132/97/69W				W White	/480 480V, 0-10V Dimming	/7PR 7 Pin Receptacle
M	346/213W	Blank 4000/5000K CCT Adjustable	B33 3H x 3V (M & L) ^{2,3}				
L	534/445W		B55 5H x 5V (M & L) ^{2,3}				

¹ Available on extra small (XS) and small (S) sizes only
² Available on medium (M) and large (L) sizes only
³ B33 & B55 only available in 4000/5000K CCT
 * 4000/500K adjustable CCT not available on 6H x 6V and 7H x 6V optics

Family	Size / Wattage	Color Temperature	NEMA Type	Mounting	Finish	Driver	RGB Color Tuning
FXLED	L						/RGB
L	340W	Blank 2200-400K Tunable White	Blank 7HX6V B55 5HX5V B33 3HX3V	SF Slipfitter Trunnion	Blank Bronze	Blank 120-277V	/RGB 16+ Million RGB colors