

RAB®



Hazardous location floods, now in higher wattages!


HAZFFLED—Class 1 Div 2 lighting.

Built tough.

Designed to perform in areas with hazardous vapor and gases, the HAZFFLED is certified for Class I, Division 2, Groups A, B, C, D and has a temperature rating of T4A or higher, depending on the model.

Ideal for use in:

- Petroleum refineries
- Fuel servicing areas
- Utility gas plants
- Dry cleaning plants
- Aircraft hangars

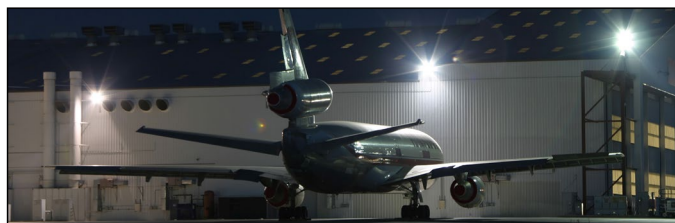



FEATURE PAGE



100,000-HOUR LED
LIFESPAN



AVAILABLE FOR
150W MODEL



IP66



NO-COMPROMISE
WARRANTY

5-YEAR,
NO-COMPROMISE
WARRANTY

RAB's warranty is
subject to all terms
and conditions found at
rablighting.com/warranty

Various wattages keep your options open.

The HAZFFLED is available in seven wattages—everything from 30W to 400W—for use in countless applications on a single site, and its wide beam spread is versatile enough for multi-purpose use. 5000K color temperature maximizes visibility to promote a safer environment.




Accessories.


Wire Guards




HAZFF-S-WG



HAZFF-M-WG



HAZFF-L-WG



HAZFF-XL-WG

Hoods



HAZFF-S-H




HAZFF-M-H



HAZFF-L-H



HAZFF-XL-H



Adjustable Arm
HAZFF-ADJ-ARM*
**For all model sizes.*

Ordering Matrix

Familia de Producto	Potencia	Montaje	Temp. De Color	Tipo de NEMA	Acabado	Controlador
HAZFFLED						
30	30W	Blank	Blank	Blank	Blank	Blank
60	60W	Yugo	5000K	7H X 6V	Gris	0-10V Atenuación, 120-277V
100	100W	SF		6H X 6V*		0-10V Atenuación, 480V**
150	150W					
200	200W					
300	300W					
400	400W					

*NEMA Tipo 6Hx6V disponible solo en 300 y 400W.

**480V disponible solo para 100, 150, 200, 300 y 400W.