




**RAB®**

# High bay solutions for tough environments. HAZL34—now in more models!

## Built tough.

Designed to perform in areas with hazardous vapor and gases, the HAZL34 is certified for Class I, Division 2, Groups A, B, C, D and has a temperature rating of T4A.

*\*80W/480V and 120W/480V models have a T5 rating.*

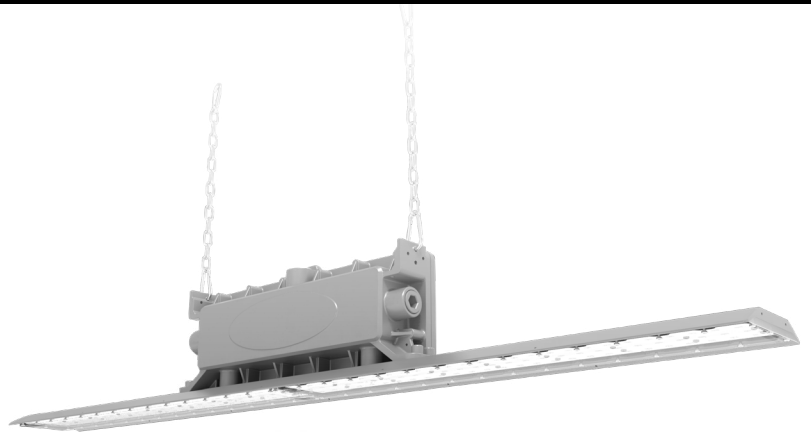



FEATURE PAGE



100,000 HOUR  
LED LIFESPAN



CERTIFIED

CERTIFIED TO UL  
STANDARD 1598  
AND 844




5-YEAR,  
NO-COMPROMISE  
WARRANTY


RAB's warranty is  
subject to all terms  
and conditions found at  
[rablighting.com/warranty](http://rablighting.com/warranty)

## For high bay applications.

The HAZL34 is offered in 2' (40W) and 4' (80W, 120W, or 200W) models in a bright 5000K for maximized visibility.



40W




5000K

80W, 120W, or 200W

## Secure installations.


All models come standard with three mounting options—pendant mount (pendant by others), chain mount, and a yoke bracket for surface mount. A separate kit is available for ceiling mount.

INCLUDED




PENDANT MOUNT

INCLUDED



CHAIN MOUNT

INCLUDED




YOKE BRACKET FOR  
SURFACE MOUNT




CEILING MOUNT KIT  
[HAZL34-CM-KIT](#)

## Wire guard accessories.

For an added level of protection, wire guards are available for both HAZL34 sizes.



[HAZL34-WG2](#)

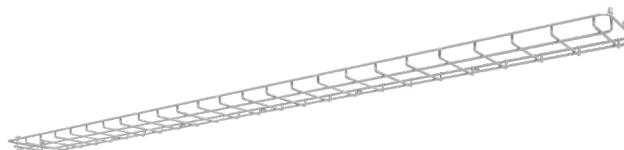

[HAZL34-WG4](#)

## Ordering Matrix

Product Family	Wattage (Size)	Color Temp	Finish	Voltage
HAZL34				
	40	Blank	Blank	Blank /480
	80		Gray	
	120			
	200			

\*For 80W, 120W and 200W.