

Lightcloud Blue | Downlights

All Lightcloud Blue-enabled downlights will instantly connect to the system's app via Bluetooth Mesh, getting you up and running in minutes.

Features



Tunable White: Color temperature that is fully adjustable within the specified range



SmartShift: Circadian lighting adjusts light levels and CCT to match the natural pattern of the sun



Natural Spectrum Technology: Mimics natural sunlight to deliver ultra-high, museum-quality, 95+ CRI that renders colors accurately so you can see them as they are.

4" and 6" Retrofit

These popular retrofit downlights are ideal for both new construction and retrofit applications. Offered in a baffled trim, they are dimmable and deliver ultra-high CRI (California Title 20 and JA8 compliant). The low-profile design makes them compatible with most recessed housings, and installation is quick and easy. An Edison base adapter is also included.



R4R89TW120WB-SS-NS/LCB*

Replaces: 65W Halogen

Wattage: 8W

Voltage: 120V

UL Listing: Wet Rated

Dimming: Down to 5%

CCT: 2700 - 6500K

CRI: 95+

Lifespan: 50,000 Hours



LCBR6R119TW120WB-SS-NS

Replaces: 18W CFL/75W INC

Wattage: 11W

Voltage: 120V

UL Listing: Wet Rated

Dimming: Down to 5%

CCT: 2700 - 6500K

CRI: 95+

Lifespan: 50,000 Hours



*Offered as an MTO. Longer lead times apply.

6" Commercial

LCBC6R189TWUNVWS-SS-NS

Replaces: 32W CFL/150W INC

Wattage: 18W

Voltage: 120-277V

UL Listing: Wet Rated

Dimming: Down to 5%

CCT: 2700 - 6500K

CRI: 95+


Lifespan: 50,000 Hours



This high-performance, 18W downlight is optimized for both new construction and retrofit applications, with a universal, 120-277V onboard driver and 0-10V dimming. Adjustable, spring-loaded retention tabs keep the fixture secure after installation, and extension ring accessories make it easy to use the 6" downlight in 8" housings.

4" and 6" Wafers

Canless wafer downlights eliminate the need for bulky housings. Their ultra-low-profile design and off-board driver make them a flexible solution for both new construction and remodeling installations in low ceilings, and the wafer's spring-loaded clips make for easy installations. Offered with a baffle trim, these wafers are wet listed and can be used in both indoor and outdoor applications. They're also NEC compliant for use in closets.

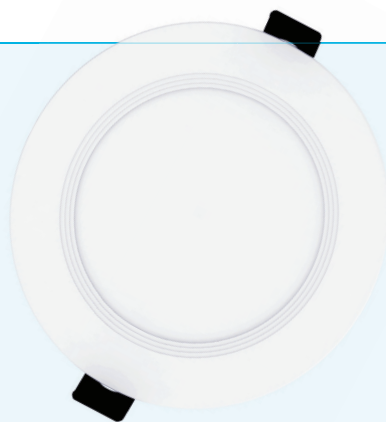

WFRL4R99TW120WB-SS-NS/LCB

Replaces: 60W INC

Wattage: 9W

Voltage: 120V

UL Listing: Wet Rated

Dimming: Down to 5%

CCT: 2700 - 6500K

CRI: 95+

Lifespan: 50,000 Hours



WFRL6R139TW120WB-SS-NS/LCB

Replaces: 75W Halogen

Wattage: 13W

Voltage: 120V


UL Listing: Wet Rated

Dimming: Down to 5%

CCT: 2700 - 6500K

CRI: 95+

Lifespan: 50,000 Hours

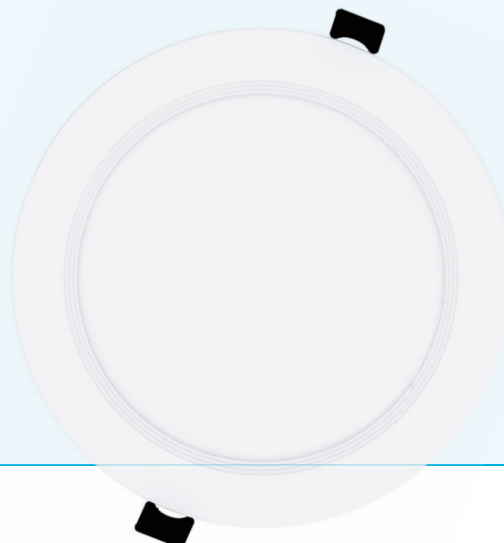

TITLE 20
6" retrofit only



TITLE 24



FCC
COMPLIANT



IC RATED



WET RATED