



RAB

And now, entering the field...PLAYER ONE.
Sports lighting that's undefeatable.

Innovation in play.

Available in 4 lumen packages and 3 NEMA distributions, you can fine-tune your lighting to match any field's needs.



P1-L (850W) and
P1-XL (1200W)

P1RGB (480W),
P1S (500W) and P1M (600W)

RGB lights up the excitement.

The RGB option integrates with existing DMX control systems* so you can upgrade your lighting without a complete overhaul.



**DMX control system not included with PLAYER ONE models.
RGB model will not produce white light.*




FEATURE PAGE




10-YEAR LIMITED WARRANTY

RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty

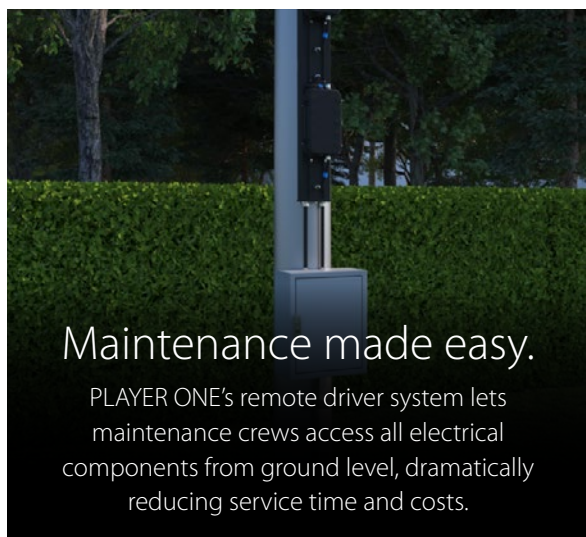


Maintenance made easy.

PLAYER ONE's remote driver system lets maintenance crews access all electrical components from ground level, dramatically reducing service time and costs.

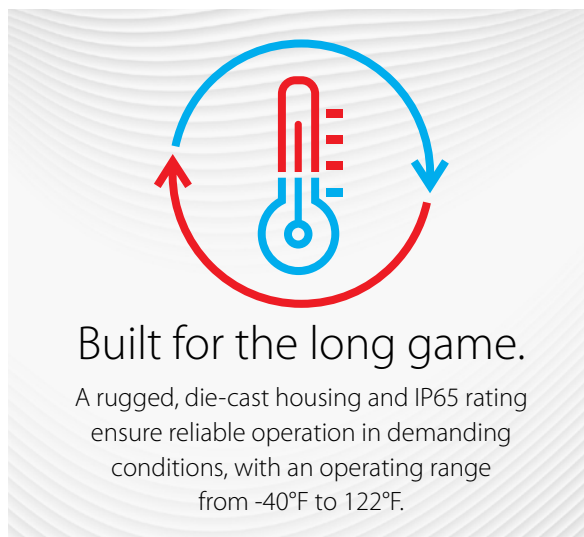

Built for the long game.

A rugged, die-cast housing and IP65 rating ensure reliable operation in demanding conditions, with an operating range from -40°F to 122°F.

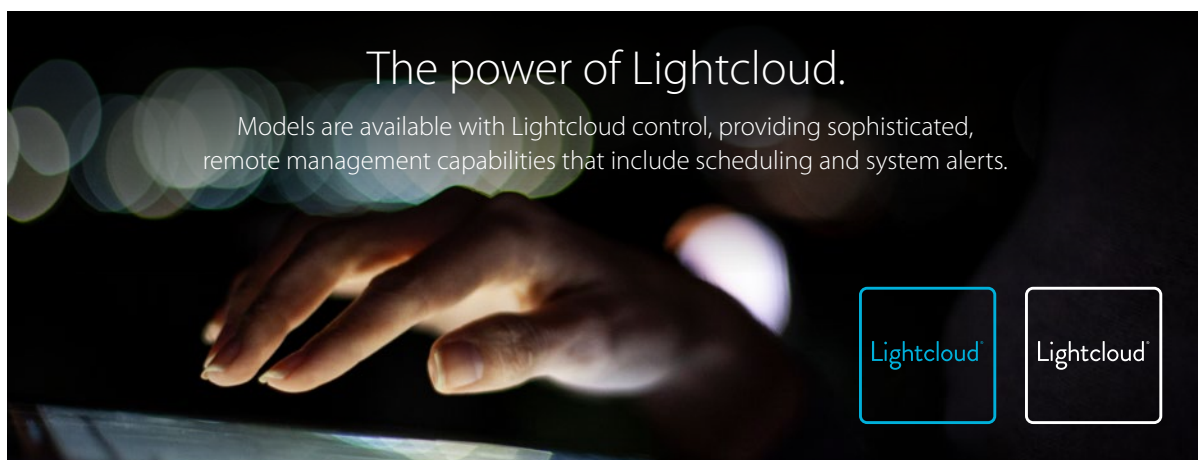

The power of Lightcloud.

Models are available with Lightcloud control, providing sophisticated, remote management capabilities that include scheduling and system alerts.

Lightcloud

Lightcloud



Accessories.



P1-SF
Slipfitter Adaptor




P1-SB
Square Beam Mounting Bracket
(for square cross arms)



P1-MR
Power Box Mounting Rail



P1-MR-RGB
Power Box Mounting Rail for RGB



P1-13C
Extension Cord Up to 164'



P1GCS-S-M
Glare Control Shield for S and M



P1GCS-L-XL
Glare Control Shield for L and XL



P1-LAS
Laser Aiming Sight

Ordering Matrix

Standard models

Product Family	Wattage	Color Temperature	Mounting	Optics	Finish	Driver	Controls
P1							
	S 500W M 600W L 850W XL 1200W*	BLANK 5700K	BLANK Yoke Mount	BLANK B33 B22	4Hx4V 3Hx3V 2Hx2V	BLANK Black BLANK /480	120-277V, 0-10V dimming 200-480V, 0-10V dimming BLANK /LC BLANK /LCB No Option Lightcloud Controller** Lightcloud Blue

Lightcloud Blue models

Product Family	Wattage	Color Temperature	Mounting	Optics	Finish	Driver	Controls
P1		RGB					
	Blank 480W	RGB	RGB BLANK Yoke Mount	BLANK 4Hx4V	BLANK Black	BLANK /480	120-277V, DMX 200-480V, DMX BLANK No Option

*XL (1200W) only available for 200-480V

**LC option available for S, M, L 120-277V