
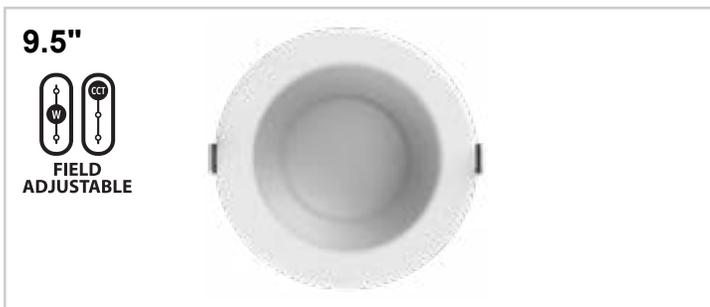


Performance Downlight Field-Adjustable

RAB

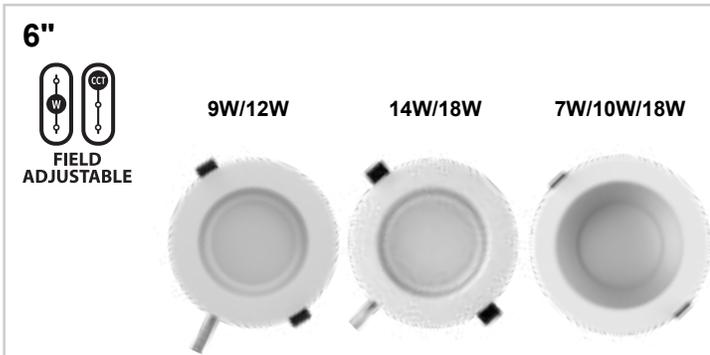

- Features**
- High Performance LEDs for commercial applications
 - Replacement for traditional Compact Fluorescent recessed downlights
 - Compatible with new construction or retrofit installations
 - UL wet and Energy Star rated
 - Meets air-tight requirements
 - Lumen and CCT Selectable
 - Matte white smooth trim finish
 - Available in 3 CCTs: 3000K, 3500K, 4000K
 - 0-10V dimmable
 - Spring loaded retention clips
 - 5-Year, No-Compromise Warranty

Project:	Type:
Prepared by:	Date:

Technical Specifications

CCT and Lumen Selectable:
Choose lumen output and color temperature before installation with integrated switch

UL Listed & UL Classified
Suitable for wet locations

Energy Star V2.2:
This product is Energy Star® Version 2.2 Certified.

California Title 24:
Can be used to conform with the requirements of California Title 24 Part 6

Dimming Driver:
Driver includes dimming control wiring for 0-10V dimming systems. Requires separate 0-10V DC dimming circuit. Dims as low as 10%

Input Voltage:
120V through 277V

Operating Frequency:
50/60Hz

Lifespan:
50,000-hour LED lifespan based on IES LM-80 results and TM-21 calculations

LEDs:
Long-life, high-efficacy surface-mount LEDs

R9 Value:
High color performance with R9 greater than or equal to 50

Flicker:
Silent and flicker free operations of less than 30%

IC Rated:
Suitable for direct contact with insulation

Air Tight:
Housing certified Air Tight as per ASTM E283

Trim:
Smooth Trim

Housing:
Constructed from durable steel sheet metal


Maximum Ambient Temperature:
Suitable for use in 40°C (104°F)

Finish:
Matte White


Dimensions

RAB


6"

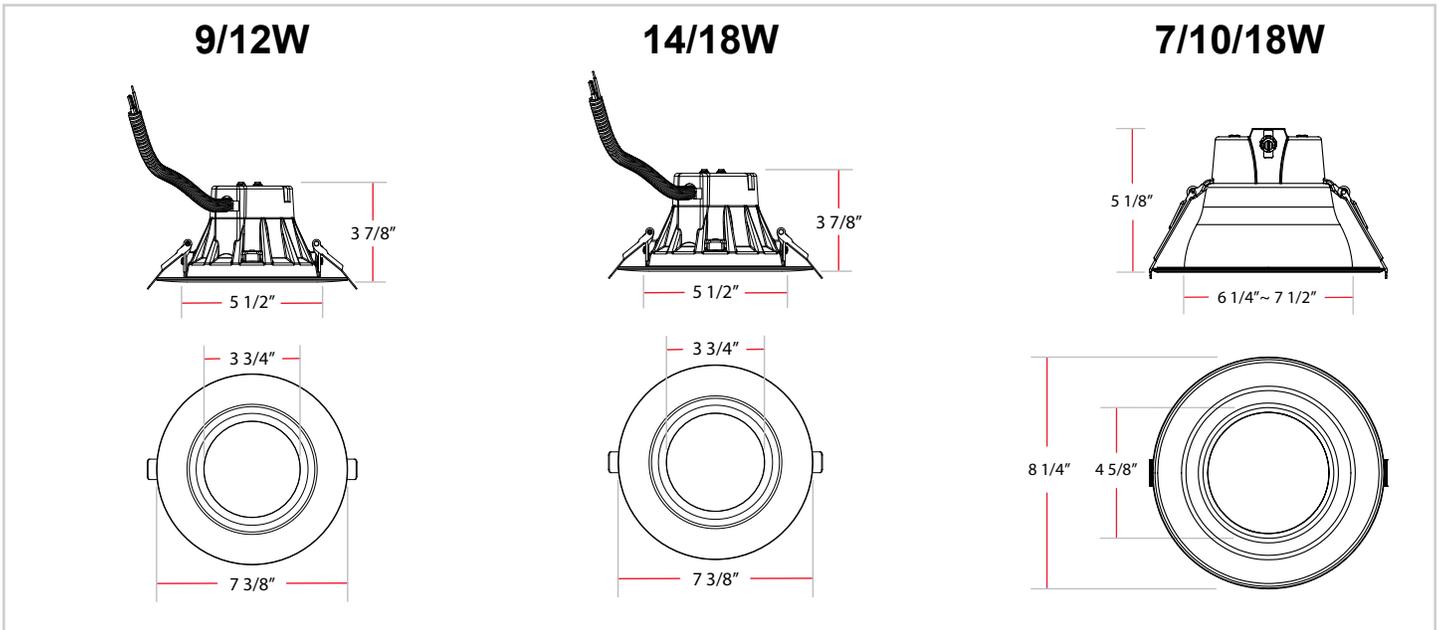

8"

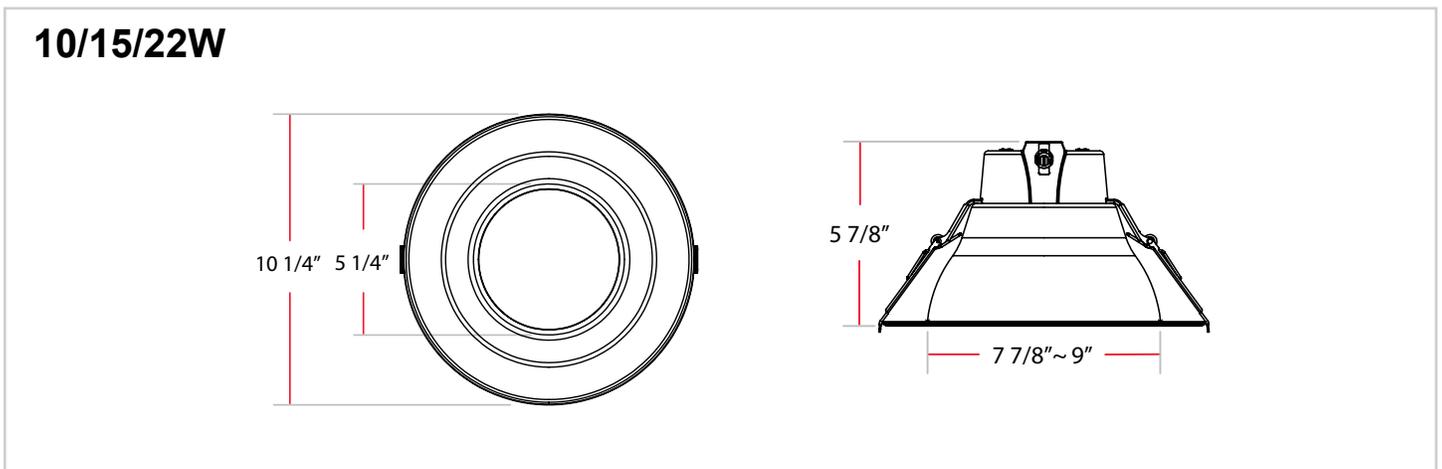


9.5"




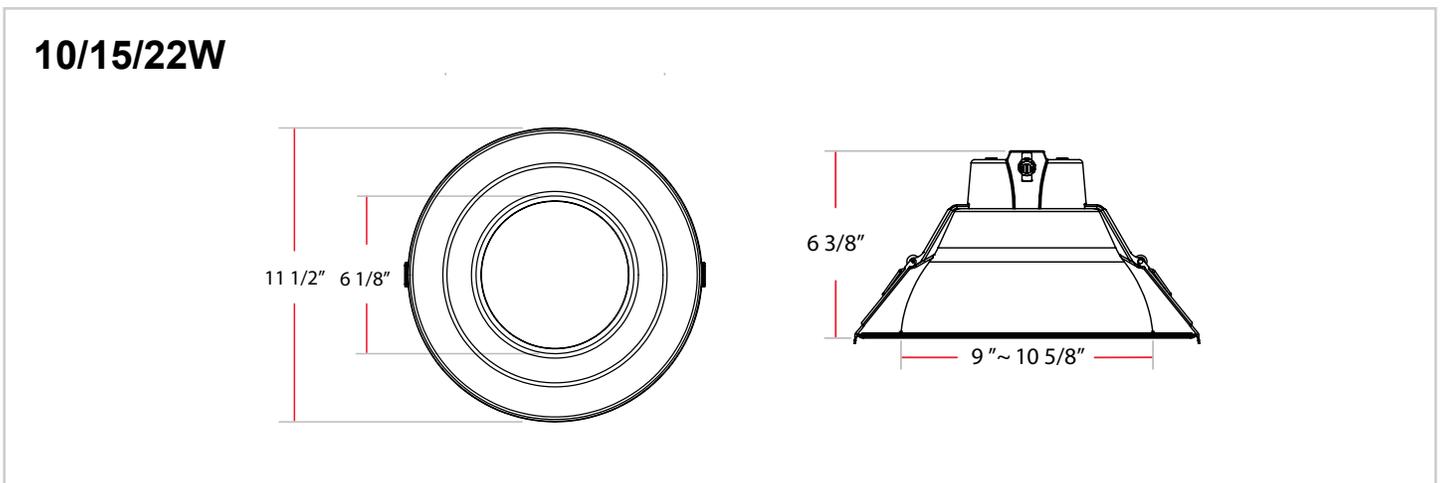


Performance

RAB

2 Lumen Output	Size	Wattage	Lumens	Efficacy (lm/W)	Color Accuracy (CRI)
C6R9/129FAUNVW 3000K 3500K 4000K	6"	9/12	700 lm 900 lm	78	90
C6R14/189FAUNVW 3000K 3500K 4000K	6"	14/18	1200 lm 1500 lm	86	90
3 Lumen Output	Size	Wattage	Lumens	Efficacy (lm/W)	Color Accuracy (CRI)
C6R7/10/189FAUNVW 3000K 3500K 4000K	6"	7/10/18	700 lm 1000 lm 1500 lm	100	90
C8R10/15/229FAUNVW 3000K 3500K 4000K	8"	10/15/22	1000 lm 1500 lm 2000 lm	100	90
C9.5R20/25/329FAUNVW 3000K 3500K 4000K	9.5"	20/25/32	2000 lm 2500 lm 3000 lm	100	90

Images	SKU Number	Description	Construction	Dimensions	Case Qty
Goof Rings - Plastic					
	<p>DL6-8GOOF/R/P</p>	<p>6" Goof Ring for 6" Downlight - 2 Lumen Output Models</p>	<p>Robust Polycarbonate construction. Matte White Finish</p>		
	<p>DL8-10GOOF/R/P</p>	<p>8" Goof Ring for 6" Downlight - 2 Lumen Output Models</p>	<p>Robust Polycarbonate construction. Matte White Finish</p>		
	<p>DL8-12GOOF/R/P</p>	<p>8" Goof Ring for 6" Downlight - 2 Lumen Output Models</p>	<p>Robust Polycarbonate construction. Matte White Finish</p>		

Goof Rings - Metal					
	DL8-10GOOF/R/M	10" Goof Ring for 8" Downlight - 3 Lumen Output Model	High-quality steel construction White powder coat finish		
	DL10-12GOOF/R/M	12" Goof Ring for 9.5" Downlight - 3 Lumen Output Model	High-quality steel construction White powder coat finish		
	DL12-14GOOF/R/M	12" Goof Ring for 9.5" Downlight - 3 Lumen Output Model	High-quality steel construction White powder coat finish		
Mounting Plates					
	DLPLATE/SJ	New Construction Plate for Stud/Joist mounting for use with 4", 6" smooth and baffle models	Sturdy galvanized steel construction		10
	DLPLATE/T	New Construction or Remodel Plate for T-Grid ceilings for use with 4", 6" smooth and baffle models	Sturdy galvanized steel construction		10
Emergency Driver					
	DRI-25-EMGR-DC	Emergency Driver	Sturdy galvanized steel construction		4
	BRACKET_TG_DRI	T-Grid bracket for Emergency Driver	Sturdy galvanized steel construction		12

Ordering Matrix

RAB

Product	Size	Shape	Wattage	CRI/Color Temp	Voltage	Finish
C		R		9FA	UNV	W
	6 6" 8 8" 9.5 9.5"	R Round	700lm-1500lm 7/10/18 700lm-900lm 9/12 1000lm-2000lm 10/15/22 1200lm-1500lm 14/18 2000lm-3000lm 20/25/32	9FA 90 CRI, Field Adjustable	120-277V UNV	W White