

RAB®

RBAY22




FIELD ADJ.



ADJUSTABLE
OPTICS



NSF
CERTIFIED

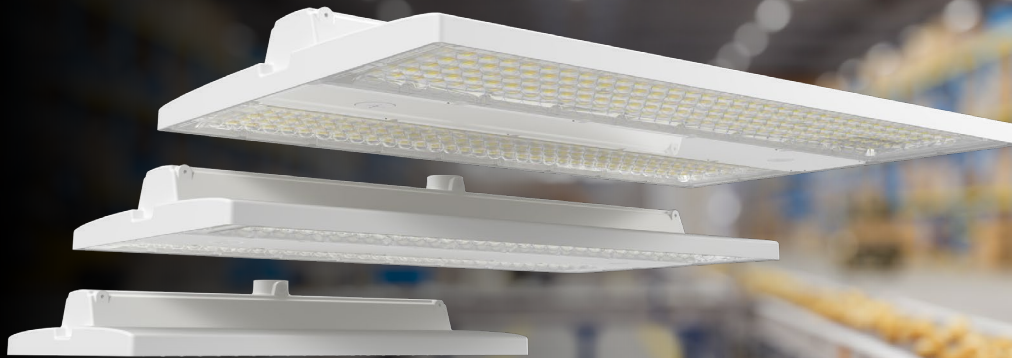


Intelligent design meets industrial strength.

RBAY22 field-adjustable high bay with selectable optics.

Innovation from every angle.

The RBAY22 puts you in control with adjustable optics that let you customize light distribution to match your space. Choose from three beam angles (55°/85°/105°) to get light exactly where you need it—whether it's serving as a long, narrow-beam aisle lighter or as general, wide-throw coverage. Field-selectable wattage and CCT let you fine tune that performance!

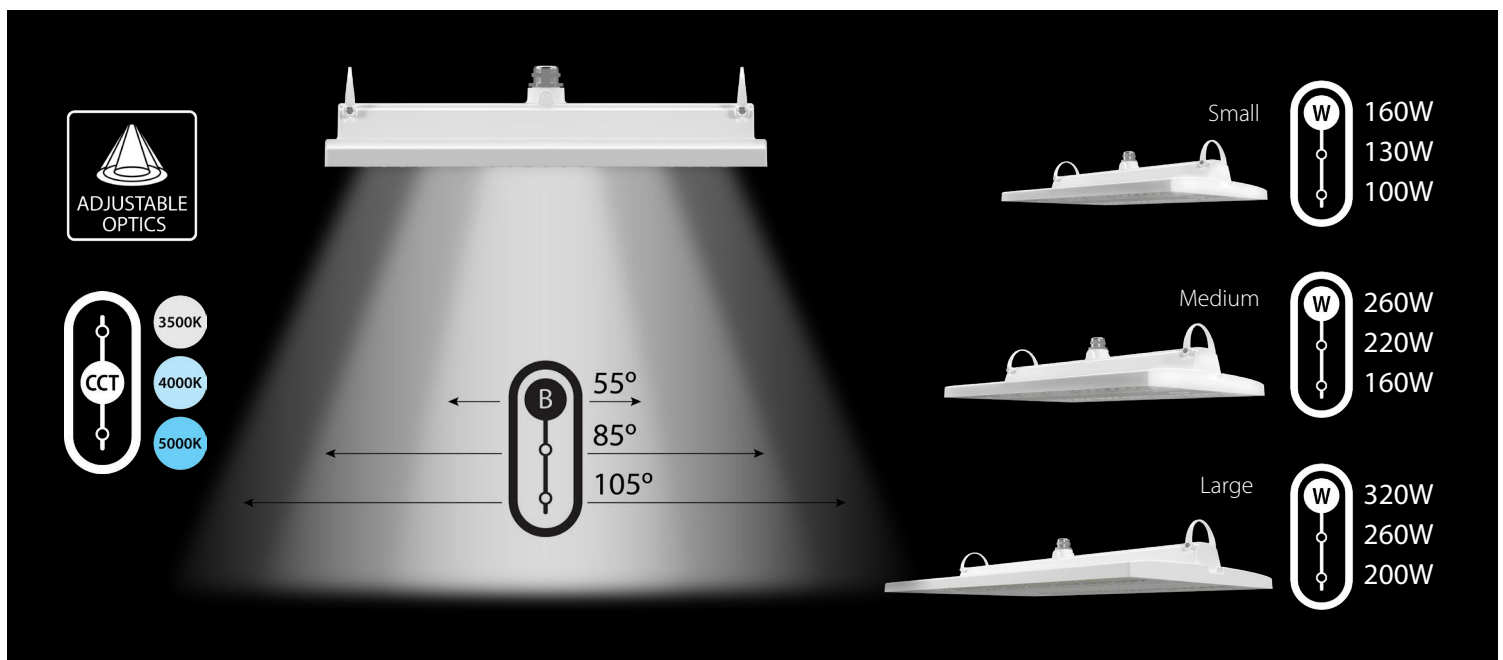



Feature Page



100,000 HRS
100,000-HOUR
LED LIFESPAN



BAT. BACKUP
EMERGENCY
BATTERY
BACKUP



0-10V
DIMMABLE



120-277V



480V



DLC
LISTED
PREMIUM



5-YEAR
LIMITED
WARRANTY

RAB's warranty is
subject to all terms
and conditions found at
rablighting.com/warranty



Versatile applications.

Available in 3 sizes, with output as high as 48,000lm, the RBY22 ensures seamless integration in everything from warehouses to manufacturing facilities and retail spaces. It also boasts an NSF rating that makes it ideal for food processing environments.



Built for the long haul.

The RBY22 is engineered for durability and longevity. Its precision die-cast aluminum housing and frosted polycarbonate lens provide superior protection, while an operating that tops out at 122°F guarantees that this fixture will thrive in demanding environments.



Smart features, smarter installation.

The RBY22 features a plug-and-play sensor port for fast and simple controls integration. The family is compatible with both standard and smart occupancy sensors which can be used as part of our wireless Lightcloud Blue control system.



Customization have never been easier.

RBY22 models are designed for suspended chain mounting but a pendant mount accessory kit is also available. Top that all off with various standard and smart emergency battery backups and this already-versatile high bay breaks the mold!

Ordering Matrix

Family Product	Wattages	Color Temperature	Distribution	Finish	Driver
RBY22					
S	160/130/100W	Blank 3500/4000/5000K	Blank	Blank	120-277V, 0-10V Dimming
M	260/220/160W	CCT Adjustable	Adjustable Beam Angle	White	480V, 0-10V Dimming
L	320/260/200W			Blank /480	