



**RAB**<sup>®</sup>



# RTLED - Quick retrofit for traditional linear fluorescent troffers.

Easy installation, cost effective, and field adjustable.

## Power and CCT selectable.

The retrofit troffer is available 2x2, 2x4, 1x4 and is now field adjustable, with three selectable wattages and color temperatures, giving you complete control over your lighting needs.

3500K

4000K

5000K

35W  
30W  
25W

30W  
25W  
18W

30W  
25W  
18W

Diagram illustrating the selectable power and CCT options for the RTLED troffer. The CCT slider is shown with three positions: 3500K (grey circle), 4000K (blue circle), and 5000K (blue circle). The power options are shown in three groups of three, each with a 'W' icon and a vertical line with two circles, indicating the wattage selection mechanism.



100,000 HOUR  
LED LIFESPAN



BATTERY  
BACKUP



5-YEAR  
LIMITED  
WARRANTY

RAB's warranty is  
subject to all terms  
and conditions found at  
[rablighting.com/warranty](http://rablighting.com/warranty)

## Save on your labor costs.

The RTLED can be retrofitted into an existing system by one person in under 3 minutes vs. 20 minutes for a complex, full fixture replacement. Multiply that savings across an average office retrofit project and you're talking big bucks!




## Upgrade aesthetics on a budget.

The center-basket design includes a diffused lens that delivers even ambient light, a brighter and more efficient output, and eliminates that annoying flickering...all without the need for expensive renovations.

## Integrated sensor options.

The RTLED is available with various options, including a battery backup, MVS or PIR sensors, and factory-installed compatibility with our Lightcloud Blue control system.

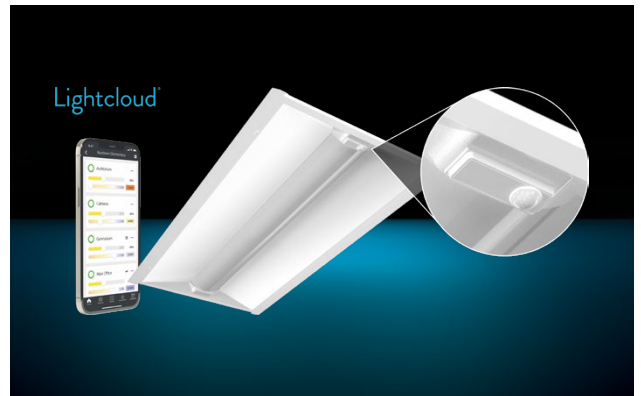

## Ordering Matrix

Product Family	Size/Selectable Wattage	Color Temp	Finish	Voltage	Options
RTLED	<p><b>2X2</b> 2' x 2': 30W/25W/18W</p> <p><b>1X4</b> 1' x 4': 30W/25W/18W</p> <p><b>2X4</b> 2' x 4': 35W/30W/25W</p>	<p><b>Blank</b> 3500/4000/5000K</p> <p>Field Adjustable</p>	<p><b>Blank</b> White</p>	<p><b>Blank</b> 0-10V Dimming, 120-277V</p>	<p><b>Blank</b> /<b>E</b> No Option</p> <p><b>/MVS</b> Battery Backup</p> <p><b>/LCB</b> Microwave Occupancy Sensor</p> <p><b>/LCBS</b> Lightcloud Blue Controller</p> <p><b>/LCBS/MVS</b> Lightcloud Blue Enabled w/ PIR Sensor</p> <p><b>/MVS/E</b> Lightcloud Blue Enabled w/ MVS Sensor</p> <p><b>/LCB/E</b> Microwave Occupancy Sensor w/ Battery Backup</p> <p><b>/LCBS/E</b> Lightcloud Blue Controller w/ Battery Backup</p> <p><b>/LCBS/MVS/E</b> Lightcloud Blue Enabled w/ PIR Sensor &amp; Battery Backup</p> <p><b>/LCBS/MVS/E</b> Lightcloud Blue Enabled w/ MVS Sensor &amp; Battery Backup</p>