

SLIM17 CCT-Adjustable, Angle-Adjustable Wall Packs **RAB**

SLIM17FA15ADJ / SLIM17FA30ADJ




PROJECT:

DATE:

TYPE:

PREPARED BY:

SLIM17FA50ADJ / SLIM17FA80ADJ



KEY FEATURES

- Angle-adjustable Wall pack, available in two size and following wattages:
SLIM17FA (Small): **15W, 30W**
SLIM17FA (Medium): **50W, 80W**
- Adjustable CCT: 3000/4000/5000K (Default: 4000K)
- Adjustable angle up to 90° in 15° increments
- Comes with integrated button photocell
- 0-10V dimming standard
- IP65 and IK07 rated
- 5-Year, limited warranty

CCT-adjustable wall packs with adjustable angle



PERFORMANCE

SLIM17FA15ADJ	3000K	4000K	5000K
WATTAGE	15W		
INPUT WATTS	14W	14W	14W
LUMENS	1,761	1,904	1,852
EFFICACY	124	136	130
CRI	70	70	70
VOLTAGE RATING	120-277V		

SLIM17FA30ADJ	3000K	4000K	5000K
WATTAGE	30W		
INPUT WATTS	29W	28W	30W
LUMENS	3,540	3,813	3,768
EFFICACY	121	134	127
CRI	70	70	70
VOLTAGE RATING	120-277V		

SLIM17FA50ADJ	3000K	4000K	5000K
WATTAGE	50W		
INPUT WATTS	48.4W	46.8W	48.2W
LUMENS	7,182	7,477	7,317
EFFICACY	148.4	159.8	151.8
CRI	84	84	83
VOLTAGE RATING	120-277V		

SLIM17FA80ADJ	3000K	4000K	5000K
WATTAGE	80W		
INPUT WATTS	80.6W	78.1W	80.4W
LUMENS	11,682	12,364	12,031
EFFICACY	144.9	158.3	149.6
CRI	84	84	83
VOLTAGE RATING	120-277V		

SLIM17 CCT-Adjustable, Angle-Adjustable Wall Packs **RAB**

TECHNICAL SPECIFICATIONS

COMPLIANCE

UL Listed

Suitable for wet locations

IK Rating

IK07 rated for protection against impact

DLC Listed

This product is listed by Design Lights Consortium (DLC) as an ultra-efficient premium product that qualifies for the highest tier of rebates from DLC Member Utilities. Designed to meet DLC 5.1 requirements.

MODEL#	DLC ID		DLC ID
SLIM17FA15ADJ	PL0MVJOV62Q3	SLIM17FA50ADJ	S-B4LR0Z
SLIM17FA30ADJ	PL8HS37YLUB0	SLIM17FA80ADJ	S-J834W0

LED CHARACTERISTICS

LEDs

Long-life, high-efficacy, surface-mount LEDs

FIELD ADJUSTABLE

Color temperature selectable: 3000/4000/5000K (Default: 4000K)

CONSTRUCTION

Cold Weather setting

Minimum starting temperature is -40°C (-40°F)

Maximum Ambient Temperature

Suitable for use in up to 50°C (122°F)

IP Rating

Ingress protection rating of IP65 for dust and water

Housing

Precision die-cast aluminum housing

Mounting

Hinged wiring access and conduit entries on the back sides, top and bottom make installation a snap

Lens

Clear polycarbonate lens

Gasket

Silicone

Green Technology

Mercury and UV free. RoHS-compliant components.

Finish

Formulated for high durability and long lasting color

ELECTRICAL

Drivers

Constant Current, Class 1, 120-277V, 50/60 Hz

15W: 120V: 0.13A, 208V: 0.07A, 240V: 0.06A, 277V: 0.05A

30W: 120V: 0.25A, 208V: 0.20A, 240V: 0.15A, 277V: 0.12A

50W: 120V: 0.51A, 208V: 0.29A, 240V: 0.26A, 277V: 0.22A

80W: 120V: 0.81A, 208V: 0.47A, 240V: 0.41A, 277V: 0.35A

Dimming Driver

Driver includes dimming control wiring for 0-10V dimming systems.

Requires separate 0-10V DC dimming circuit. Dims down to 10%.

THD @4000K

15W: 6.4% at 120V, 12.4% at 277V

30W: 7.3% at 120V, 15.7% at 277V

50W: 6.2% at 120V, 10.1% at 277V

80W: 10.9% at 120V, 10.4% at 277V

Power factor @4000K

15W: 99.4% at 120V, 92.3% at 277V

30W: 99.2% at 120V, 91.9% at 277V

50W: 99.3% at 120V, 94.2% at 277V

80W: 99.4% at 120V, 96.9% at 277V

Photocell

120-277V compatible, integrated button photocell included.

Surge Protection

L/N-PE: 6KV, L-N: 6KV

OTHER

Warranty

The RAB 5-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Lifespan


100,000-hour LED lifespan based on IES LM-80 results and TM-21 calculations

SLIM17 CCT-Adjustable, Angle-Adjustable Wall Packs

RAB®

DIMENSIONS

SLIM17FA

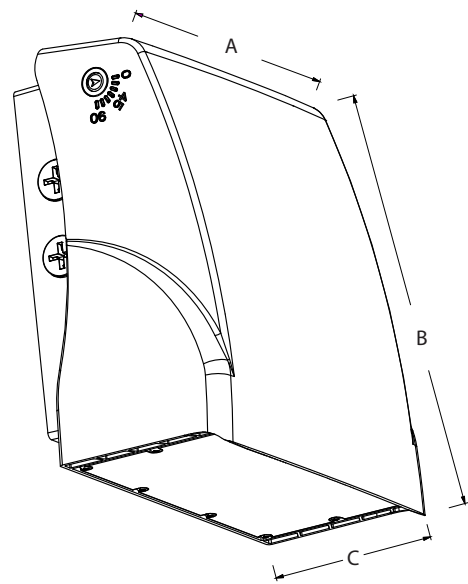

MODEL#	A	B	C	Weight
SLIM17FA15ADJ	7 1/16"	7 3/8"	4"	3 lbs
SLIM17FA30ADJ	7 1/16"	7 3/8"	4"	3 lbs
SLIM17FA50ADJ	8 3/8"	9 1/8"	4"	4.4 lbs
SLIM17FA80ADJ	8 3/8"	9 1/8"	4"	4.8 lbs

ORDERING MATRIX

SLIM17FA

Family	Wattage		Style	Color Temperature		Finish	Driver		Controls	
SLIM17FA										
	15	15W	ADJ	Angle	BLANK	3000/4000/5000K,	BLANK	120-277V,	BLANK	Button Photocell
	30	30W		Adjustable		CCT Adjustable	Bronze	0-10V Dimming		
	50	50W								
	80	80W								