


Edge-Lit Surface Mount Panel

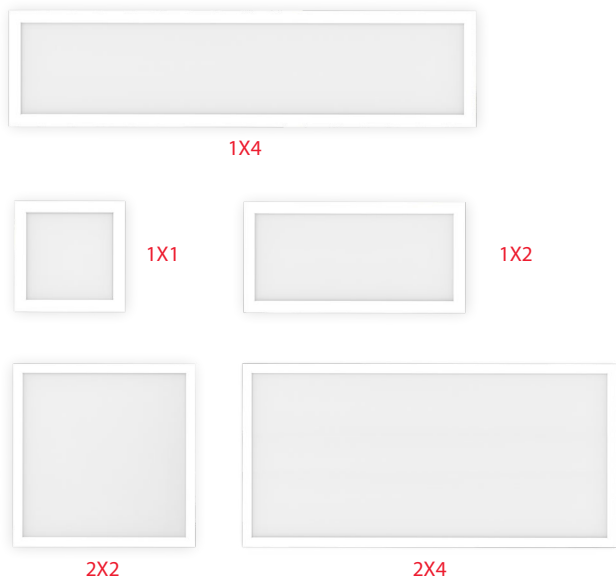

PROJECT: _____

DATE: _____

TYPE: _____

PREPARED BY: _____



*Select models

KEY FEATURES

- Select from 5 field-adjustable color temperatures **2700K, 3000K, 3500K, 4000K, or 5000K**
- Suitable for **indoor** applications in **dry** and **damp** environments
- **Dimmable** (see *Dimmer Compatibility List*)
- Compatible with 3"/4" J-BOX installation
- Meets **California Title 24** requirements
- **50,000-Hour** lifespan
- **5-year, no-compromise warranty**

Edge-Lit, Surface Mount Panel



PERFORMANCE

Catalog#	Size	Equivalency	Lumens	Input Wattage	Efficacy	Color Temperature	CRI	L70 Lifespan	Energy Star ID	DLC ID
SMPFA1X1S20UNVTW	1'x1'	40W CFL	1,700 Lm	20W	85 Lm/W	Field-Adjustable dip switch 5000K/4000K/3500K/3000K/2700K	90+	50,000 hr	2396875	N/A
SMPFA1X2RT22UNVTW	1'x2'	45W CFL	1,900 Lm	22W	86 Lm/W				2396877	N/A
SMPFA1X4RT45UNVTW	1'x4'	90W CFL	4,050 Lm	45W	90 Lm/W				2396878	N/A
SMP2X2	2'x2'	90W CFL	4,950 Lm	45W	110 Lm/W				N/A	S-7N9JCA
SMP2X4	2'x4'	110W CFL	6,050 Lm	55W	110 Lm/W				N/A	S-BJQOXD

SMPFA1X1S20UNVTW	5000K	4000K	3500K	3000K	2700K
LUMENS	1,850	1,850	1,800	1,750	1,700
EFFICACY (LM/W)	93	93	90	88	85

SMP2x2	5000K	4000K	3500K	3000K	2700K
LUMENS	5,078	5,157	5,130	5,005	4,929
EFFICACY (LM/W)	113	115	115	110	110

SMPFA1X2RT22UNVTW	5000K	4000K	3500K	3000K	2700K
LUMENS	2,060	2,060	2,000	1,950	1,900
EFFICACY (LM/W)	94	94	91	89	86

SMP2x4	5000K	4000K	3500K	3000K	2700K
LUMENS	6,510	6,378	6,253	6,152	6,064
EFFICACY (LM/W)	118	116	114	111	110

SMPFA1X4RT45UNVTW	5000K	4000K	3500K	3000K	2700K
LUMENS	4,400	4,400	4,290	4,170	4,050
EFFICACY (LM/W)	98	98	95	93	90

TECHNICAL SPECIFICATIONS

CONSTRUCTION

Product Type

Surface & Flush Mounts

Housing Material

Metal

Size

1'x1', 1'x2', 1'x4', 2'x2', 2'x4'

Trim Style

Smooth

Finish

White

Shape

Square, Rectangle

Lens

Polycarbonate

Beam Angle

110°

COMPLIANCE

Safety Listing

UL Listed

Environment

Suitable for use in indoor applications in dry and damp environments.

IC Rated

No

Air Tight

No

Energy Star Compliant

Yes, select models of this product are ENERGY STAR Version 2.2 Certified.

DLC Listed

Yes. Select models are on the Design Lights Consortium (DLC) Qualified Products List and is eligible for rebates from DLC Member Utilities. Designed to meet DLC 5.1 requirements.

T24 JA8 Compliant

Can be used to conform with the requirements of California Title 24 Part 6.

T20 Compliant

SMPFA: Can be used to conform with the requirements of California Title 20.

SMP: Not compliant

California Energy Commission (CEC) Status

Lawful for Sales in California

NEC Compliant

Suitable for use in closets. Compliant with NEC Sec. 410.16 (A)(1) and 410.16 (C1).

IESNA LM-79 & LM80 Testing

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80.

FCC

Complies with Part 15 of the FCC Rules.

RoHS

Mercury and UV free. RoHS-compliant components.

INSTALLATION

Mounting

Surface Mount

ELECTRICAL

Dimming

Yes, TRIAC/ELV dims down to 10%. (See *Dimmer Compatibility List*)

THD

≤30%

Power Factor

≥0.9

Input Voltage

120-277V

Flicker

≤30

Operating Frequency

50/60Hz

Operating Temperature

-4°F to 104°F (-20°C to 40°C)

LED CHARACTERISTICS

Color Temperature

Field-Adjustable dip switch 2700/3000/3500/4000/5000K

Color Accuracy (CRI)

>90 CRI

R9 Value

High color performance with R9 greater than or equal to 50

Color Consistency

4-step MacAdam Ellipse binning to achieve consistent fixture-to-fixture color

Color Stability

LED color temperature is warranted to shift no more than 200K in color temperature over a 5-year period

Color Uniformity

RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

OTHER

Warranty

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish.

RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.


Note

All values are typical (tolerance +/- 10%)

Edge-Lit Surface Mount Panel


DIMENSIONS

1'x1' and 2'x2'

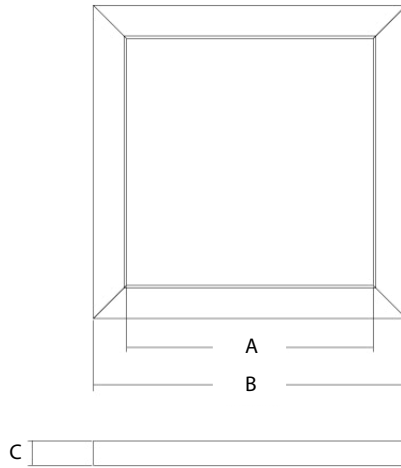

Square Panels	Weight	A	B	C
SMPFA1X1S20UNVTW	1.97 lbs	9 1/8"	11 5/8"	15/16"
SMP2X2	7.05 lbs	20 15/16"	23 7/16"	15/16"

1'x2', 1'x4', and 2'x4'

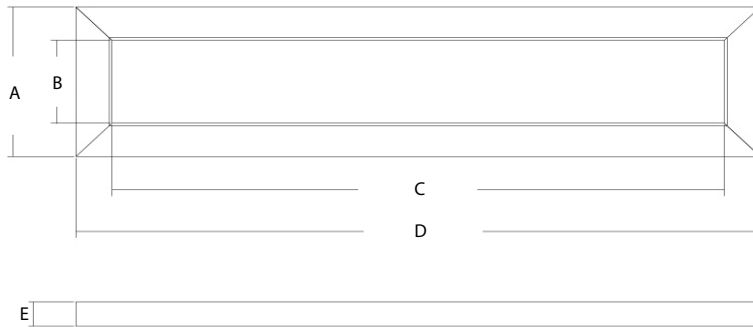


Rectangular Panels	Weight	A	B	C	D	E
SMPFA1X2RT22UNVTW	4.22 lbs	11 5/8"	9 1/8"	20 15/16"	23 7/16"	15/16"
SMPFA1X4RT45UNVTW	8.86 lbs	11 5/8"	9 1/8"	44 3/4"	47 1/4"	15/16"
SMP2x4	14 lbs	23 7/16"	20 15/16"	44 3/4"	47 1/4"	15/16"

Edge-Lit Surface Mount Panel

ACCESSORIES

Emergency Driver

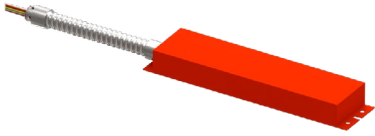

Catalog Number	UPC	Description
DRI-21-EMGR-DC-DC10	192552028264	Emergency backup driver

ORDERING INFO

Catalog Number	Model Number	UPC	Case Pack
SMPFA1X1S20UNVTW	DLS0162(SMPFA1X1S20UNVTW)	192552018678	1
SMPFA1X2RT22UNVTW	DLS0164(SMPFA1X2RT22UNVTW)	192552018692	1
SMPFA1X4RT45UNVTW	DLS0165(SMPFA1x4RT45UNVTW)	192552018708	1
SMP2X2	DLS0173(SMP2X2)	192552028837	1
SMP2X4	DLS0172(SMP2X4)	192552028820	1

ORDERING MATRIX

SURFACE MOUNT PANEL

Family	Size/Shape	Wattage	CRI/Color Temp	Voltage/Dimming	Finish					
SMPFA				UNVT	W					
	1x1S	1'X1', Square	20	20W (1x1)	Blank	90CRI,	UNVT	120-277V, TRIAC/ELV	W	White
	1x2RT	1'X2', Rectangle	22	22W (1x2)	Blank	2700/3000/3500/4000/5000K				
	1x4RT	1'X4', Rectangle	45	45W (1x4)	Blank	Field-Adjustable				

Family	Size/Shape	CRI/Color Temp	Voltage/Dimming	Finish				
SMP								
	2x2	2'X2', Square, 45W	Blank	90CRI, 2700/3000/3500/4000/5000K Field-Adjustable	Blank	120-277V, TRIAC/ELV	Blank	White
	2x4	2'X4', Rectangle, 55W						