




T34, now with tunable CCT and SmartShift!

Ultra-economy, backlit panels with circadian control.

We've brought circadian lighting to our ultra-economy panels!

The T34 FA is available in three formats, all with tunable CCT and SmartShift capability. Once installed alongside a Lightcloud Blue control system, it can automatically tune the CCT and intensity of your lights throughout the day, syncing with the natural cycles of daylight..

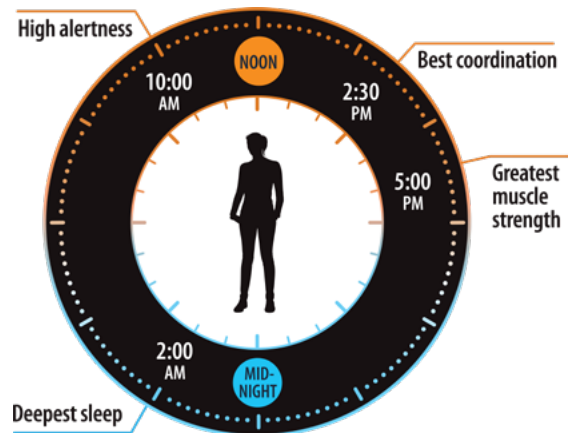

Take energy savings to the next level.

The T34 FA is also available in high-efficacy models for additional cost savings. With efficacies of up to 148 lm/W, the T34 FAHE exceeds DLC Premium requirements for LED panels.





Visit rablighting.com for details



RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty

Tight spaces? No problem.

The T34 FA's low-profile design is IC rated for direct contact with ceiling insulation, and is also Chicago Plenum (CCEA) compliant. Integral earthquake clips secure the panel to T-bars and won't get lost during installation.



Seeing is believing.

A lightweight, frosted, polystyrene lens diffuses light, making the T34 FA and T34 FAHE ideal for areas that require uniform, glare-free distribution.

Maximized energy savings.

The T34 is available with an integrated, LCB-enabled microwave or passive infrared occupancy sensor, both of which also include closed-loop daylight harvesting. Models with either of these sensors can serve as Luminaire Level Lighting Controls (LLLC), qualifying the T34 for more significant utility rebates.



Mounting Kits for T34 FA



Mounting Kits for T34 FAHE



Versatile mounting.

The T34 FA and FAHE are designed for use in recessed ceilings but can also be mounted directly to drywall with one of our surface mounting kits.



Ordering Matrix

Family	Size/Wattage	Color Temp	Finish	Voltage	Controls	Battery Backup
T34FA						
	2X2 2' x 2' (40/30/20W)	Blank 3000/4000/5000K*	Blank White	Blank 120-277V	Blank No Option	Blank No Option
	2X4 2' x 4' (40/30/20W)	Blank Tunable White 3000-6500K*			MVS Microwave Occupancy Sensor	/E Battery Backup
	1X4 1' x 4' (50/40/30W)				/LC Lightcloud	
					/LCB Lightcloud Blue	
					/LCBS Lightcloud Blue PIR sensor	
					/LCBS/MVS Lightcloud Blue MVS sensor	

Family	Size/Wattage	Color Temp	Finish	Voltage	Controls	Battery Backup
T34FAHE						
	2X2 2' x 2' (30/23/17W)	Blank Field Adjustable 3500/4000/5000K	Blank White	Blank 0-10V Dimming 120-277V	Blank No Option	Blank No Option
	2X4 2' x 4' (30/23/17W)				/LC Lightcloud Controller	/E Battery Backup
					/LCB Lightcloud Blue	

*Tunable white only available on Lightcloud Blue models.
Lightcloud Blue models come in fixed wattages: 2' x 2' and 1' x 4' at 40W, and 2' x 4' at 50W.
All non-smart models have three selectable CCTs.