




Backlit, field adjustable and low profile.

The ultra-economy T34™ FA and T34 FAHE.

Dialed-in control.

We've brought field-adjustability to our ultra-economy panels!

The T34 FA is available in 2x2, 1x4, and 2x4 formats with three selectable lumen outputs and color temperatures. The 0-10V dimmable driver allows for an additional layer of control over your lighting.

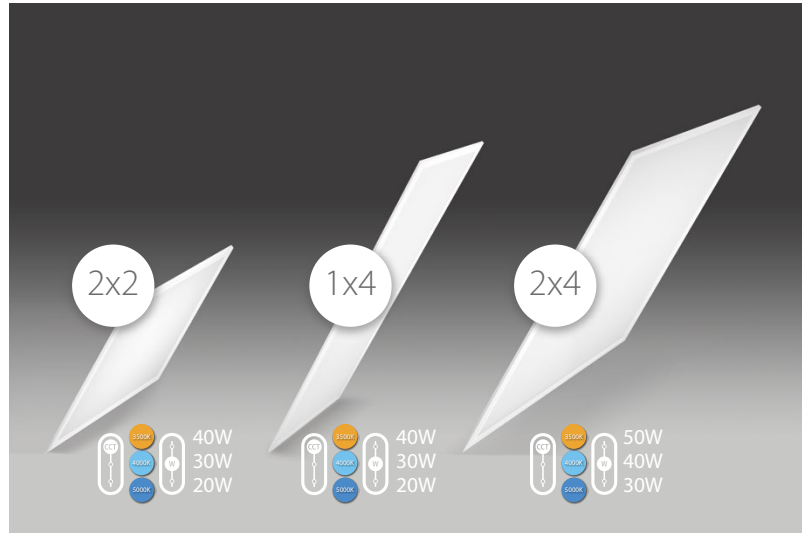


Take energy savings to the next level.

The T34 FA is also available in high-efficiency models for additional cost savings. With efficacies of up to 148 lm/W, the T34 FAHE exceeds DLC Premium requirements for LED panels.



Tight Spaces? No problem.

The T34 FA's low-profile design is IC rated for direct contact with ceiling insulation, and is also Chicago Plenum (CCEA) compliant. Integral earthquake clips secure the panel to T-bars and won't get lost during installation.

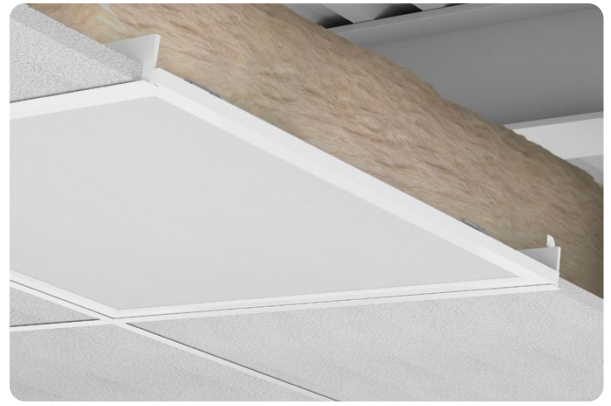

FIELD ADJ.



50,000 HRS



Visit rablighting.com for details



5-YEAR, LIMITED WARRANTY

RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty

Mounting Kits for T34 FA



Mounting Kits for T34 FAHE



Seeing is believing.


A lightweight, frosted, polystyrene lens diffuses light, making the T34 FA and T34 FAHE ideal for areas that require uniform, glare-free distribution.

Versatile mounting.

The T34 FA and FAHE are designed for use in recessed ceilings but can also be mounted directly to drywall with one of our surface mounting kits.

Get in control.

The T34 FA and T34 FAHE are available with factory-installed Lightcloud® Blue compatibility, for use with our wireless, Bluetooth mesh control system.



Ordering Matrix

T34 FA

Family	Size	Color Temp	Finish	Voltage	Options
T34FA					
	2X2 2' x 2' (40/30/20W)	Blank Field Adjustable	Blank White	Blank 0-10V Dimming	Blank No Option
	1X4 1' x 4' (40/30/20W)	5000/4000/3500K		120-277V	/LC Lightcloud Controller
	2X4 2' x 4' (50/40/30W)				/LCB Lightcloud Blue
					/MVS Occupancy Sensor
					/E Battery Backup

T34 FAHE

Family	Size	Color Temp	Finish	Voltage	Options
T34FAHE					
	2X2 2' x 2' (30/23/17W)	Blank Field Adjustable	Blank White	Blank 0-10V Dimming	Blank No Option
	2X4 2' x 4' (30/23/17W)	5000/4000/3500K		120-277V	/LC Lightcloud Controller
					/LCB Lightcloud Blue
					/E Battery Backup