


TEMPBAY - Temporary UFO High Bay

RAB



TEMPBAY-130

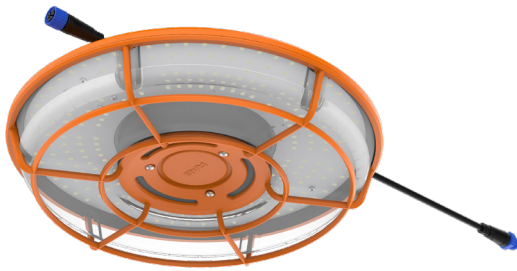

120V Plug Cable

Hard Wire Cable

15,300 Lumens Temporary High Bay,
120-277V, 5000K, Linkable



5000K



80 CRI



WET
RATED



LINKABLE



4kV
SURGE



120V-277V

PROJECT:

DATE:

TYPE:

PREPARED BY:



KEY FEATURES

- Temporary UFO high bay great for industrial applications
- Over 15,000 lumens and super bright 5000K CCT
- Robust die-cast aluminum construction with clear polycarbonate lens
- Linkable SJOW cord with watertight quick connectors to daisy chain fixtures
- 120-277V Driver, 4kV surge protection, and IP65 Rated
- Comes with 120V NEMA 5-15 plug and hard wire cable in box
- 120-277V NEMA plug and 25 ft extension cable sold separately

PERFORMANCE

Catalog Number	Wattage Equivalency	Input Wattage	Lumens	Efficacy	Input Voltage	Color Temperature	L70 Lifespan	Environment
TEMPBAY-130	400W Halide	130W	15304	121.82 lm/w	120-277V	5000K	50,000 hrs	Wet

TECHNICAL SPECIFICATIONS

CONSTRUCTION

Product Type

Temporary Round High Bay

Connectors

1FT NEMA 120V 5-15P Plug & 1FT Hardwire lead included in box

Wires

39Ft 18/3 AWG Female M15 waterproof connector

6Ft 18/3 AWG Male M15 waterproof connector

Housing Material

Die-cast Aluminum housing

Finish

Construction orange

Lens

Clear impact resistant polycarbonate diffuser

Switch

Included waterproof On/Off switch

INSTALLATION

Installation Method

Plug and play with included 120V plug or direct wire to line voltage

Mounting

Hang mounting with included caribeaner hook

Linkable

120V: 5pcs, Max 600W

277V: 10pcs, Max 1200W

TECHNICAL SPECIFICATIONS (CONT.)

ELECTRICAL

Dimmable

2-Level brightness switch 100% / 50% / OFF Settings

Driver

Constant Current Class 1 Driver

Input Voltage

120-277V

Operating Frequency

50/60Hz

Operating Temperature

-20°F to 113°F (-30°C to 45°C)

THD

≤25%

Power Factor

≥0.9

Flicker

≤30%

Surge Protection

4 kV

COMPLIANCE

Environment

Suitable for use indoors and outdoors in dry, damp, or wet environments.

California Energy Commission (CEC) Status

Lawful for Sales in California

RoHS

Mercury and UV free. RoHS-compliant components.

FCC

Complies with Part 15 of the FCC Rules.

OTHER

Warranty

The RAB 3-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

LED CHARACTERISTIC

Beam Angle

180 degree

Color Temperature

5000K

Color Accuracy

>80



Color Consistency

<7-step MacAdam Ellipse binning to achieve consistent fixture-to-fixture color

DIMENSIONS

TEMPBAY-130

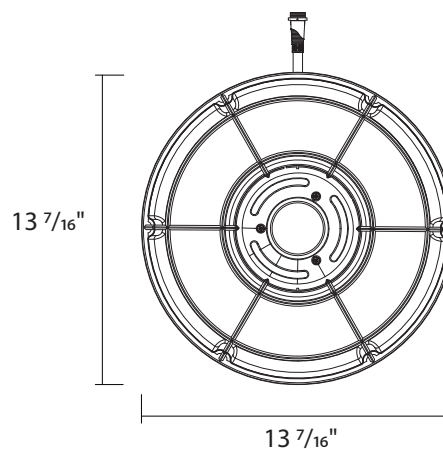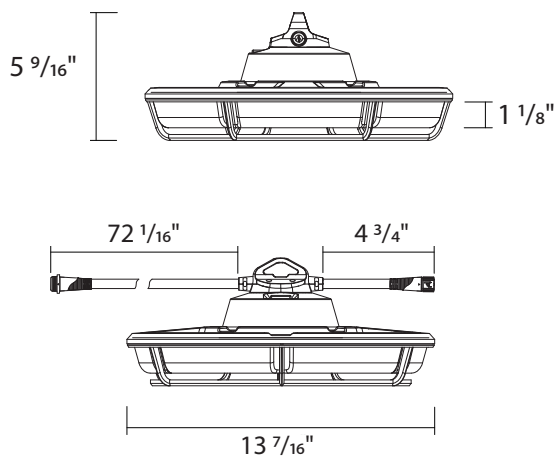

Weight: 4.4 lbs



TEMPBAY - Temporary UFO High Bay



ACCESSORIES

	Catalog Number	UPC	Description
	TEMP-PLUG/277	192552051231	TEMP LIGHT L7-20P PLUG 277VAC PLUG
	Catalog Number	UPC	Description
	TEMP-CBL	192552051248	TEMP LIGHT EXTENSION CABLE 25FT

ORDERING INFO

Catalog Number	Model Number (DLC/Energy Star)	UPC	Case Pack
TEMPBAY-130	UFO TEMP LIGHT 120-277VAC 130W 15600LM 5000K	192552051224	4

ORDERING MATRIX

Family	Wattage	CRI/Color Temp	Driver	Finish
TEMPBAY -	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
	130 130W (15,300lm)	Blank 80 CRI; 5000K	Blank 120-277V	Blank Orange