


# RAB®

# TOMO




## Elegance that's affordable.

Field-adjustable TOMO—the elevation of linear lighting.

### A marriage of form and function.

The TOMO was designed to combine the performance of standard wraps with the architectural appeal of high-end linear lighting—all with an affordable price. Available in three lengths, the TOMO provides both field-adjustable wattage and CCT. The sleek TOMO design is ideal for use in schools, offices, or institutions that need a contemporary low-glare look with the added convenience of uplight.

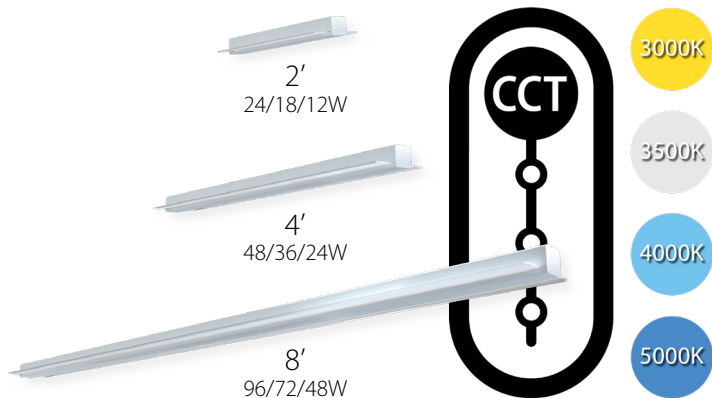

### Things are looking up.

TOMO's "wing" lenses boast a dot-matrix pattern that allows the fixture to deliver 30% uplight, much like a conventional wrap. The edge-lit light provides a contemporary look and emits a soft, even glow that reduces glare.





DLC Listed



100,000 HOUR LED LIFESPAN



0-10V DIMMING DOWN TO 5%



BATTERY BACKUP (4' AND 8' MODELS ONLY)



5-YEAR NO COMPROMISE WARRANTY


RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty)

## Options galore.

All models of the TOMO are available with an integrated PIR sensor, a Lightcloud Controller, or a Lightcloud Blue Controller. A battery backup is also available for 4' and 8' models and can be used in combination with the sensor or either Controller.



# Lightcloud®

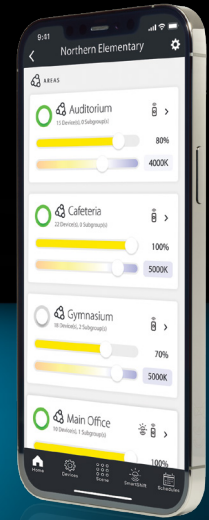


## We've got connections.

Continuous-run mounting is a breeze with the secure, quick-connect adapter (separate accessory). Just wire the first fixture in the run and connect the rest!




## Mounting options.

The TOMO comes standard with two mounting accessories: aircraft cable for secure, suspended mounts and a stainless bracket for easy mounting to junction boxes.



Stainless Bracket



Suspended Mount

Two 120" cables included

## Ordering Matrix

Product Family	Length (Wattages)	Color Temp	Finish	Voltage	Options
TOMO	2 2 ft (24/18/12W) 4 4 ft (48/36/24W) 8 8 ft (96/72/48W)	Blank 3000/3500/4000/5000K Selectable	Blank White	Blank 120-277V, 0-10V Dimming	Blank No Option Passive Infrared Occupancy Sensor /E Battery Backup* /LC Lightcloud Controller /LC/E Lightcloud Controller w/ Battery Backup* /PIR/E Passive Infrared Occupancy Sensor w/ Battery Backup* /LCB Lightcloud Blue-enabled /LCBS Lightcloud Blue-enabled w/ PIR sensor /LCB/E Lightcloud Blue-enabled w/ battery backup* /LCBS/E Lightcloud Blue-enabled w/ PIR sensor and battery backup*

\*Available only for 4' and 8'