

RAB®

TOTEM



FIELD ADJ.



High mast output with
precision, rotatable optics.

The field-adjustable TOTEM high mast light.

Eight levels of power,
one simple dial.

TOTEM puts the power in your hands—literally. A dial inside the driver box lets you select between 8 different wattages without climbing a pole. Dial it down for off-peak hours or crank it up for maximum coverage.



FIELD ADJ.





FEATURE PAGE



100,000-HOUR
LED LIFESPAN



120-277V



480V



0-10V



IP RATING



VIBRATION




5-YEAR
LIMITED
WARRANTY

RAB's warranty is
subject to all terms
and conditions found at
rablighting.com/warranty


Aim it exactly where you need it.

TOTEM's housing flange rotates 165° left and right, and the fixture tilts from 0 to 5° in 1° increments, so you can put the light precisely where the application demands.

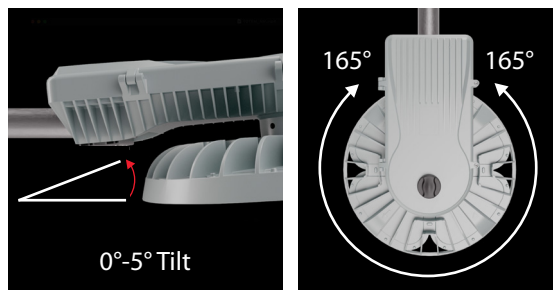

Match the light to the site.

TOTEM comes in five IES distribution types—Type I through Type V Square—so you get the right pattern for roadways, parking lots, or open yards without fighting spill or dark spots.

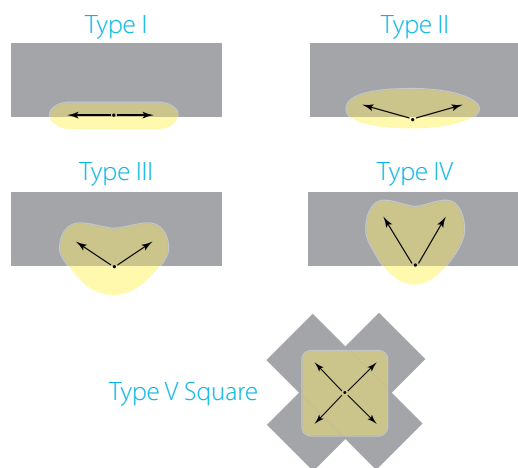

Built for the long haul.

IP66 rated, 3G vibration resistant, and backed by a 20kV surge protector, TOTEM is built to perform in the most demanding conditions, and a 1,000-hour salt spray test assures you it can stand up to corrosive environments.



Fits the infrastructure you already have.

TOTEM mounts to 1-5/8" to 2-3/8" pipe arms and on pole heights from 50 to 130 ft, so it integrates into standard high mast systems without custom hardware or extra engineering.



Control options built in.

A 7-pin receptacle with shorting cap is included as standard, making TOTEM ready for photocell and control integration right out of the box. Optional house side shields install in 8 directions to direct light exactly where it belongs and minimize spill.



TM-HSS
House Side Shield
(Bronze)



TM-HSSG
House Side Shield
(Roadway Gray)



R-3P-PCT-HP
3-Pin Twistlock Photocell
120-277V



R-3P-PCT-480V
3-Pin Twistlock Photocell
480V

Ordering Matrix

Product Family	Distribution	Wattage	Mounting	Color Temp	Finish	Driver	Controls
TM							
1T	Type I	600	Blank	Blank	Blank	Blank	Blank
2T	Type II	600/540/480/420/360/300/240/150W	Adjustable Pole Mount	5000K	Bronze	120-277V,	7-Pin Receptacle
3T	Type III	900/810/720/630/540/450/360/225W		4000K	Roadway Gray	0-10V Dimming	w/Shorting Cap
4T	Type IV					200-480V,	
5T	Type V Square					0-10V Dimming	