



# How stunning decorative effects come to life.

Transform all your spaces with flexible light.

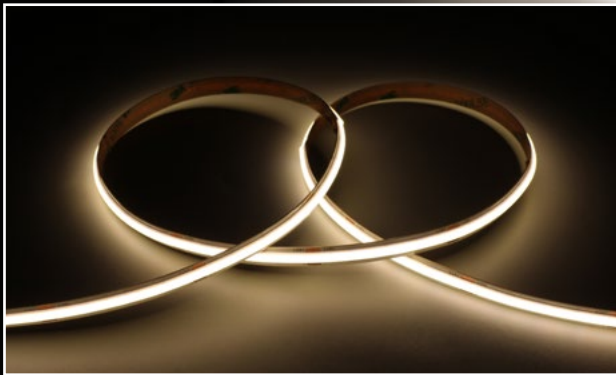


ARCTAPE

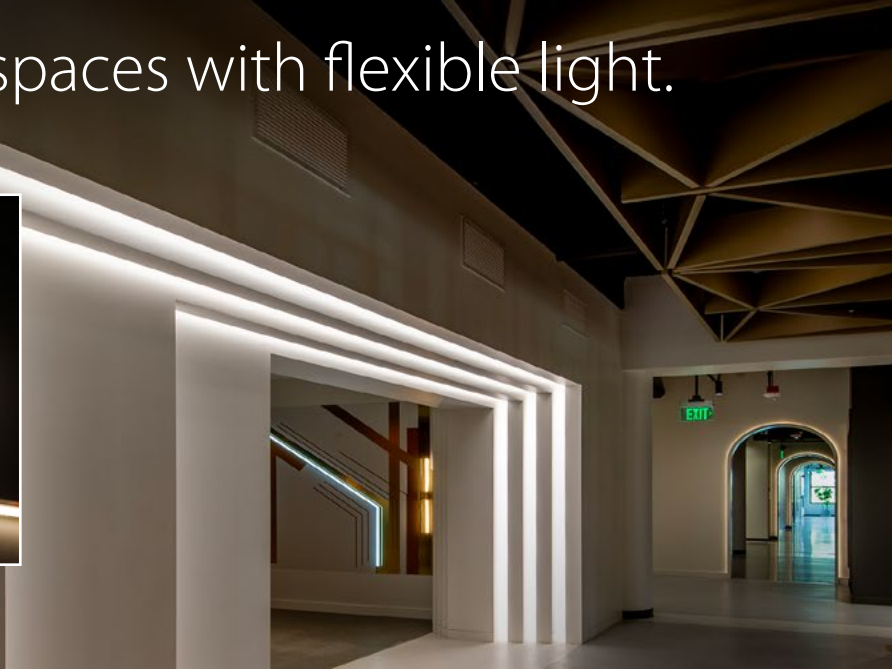

FLEXTAPE



NEOFLEX

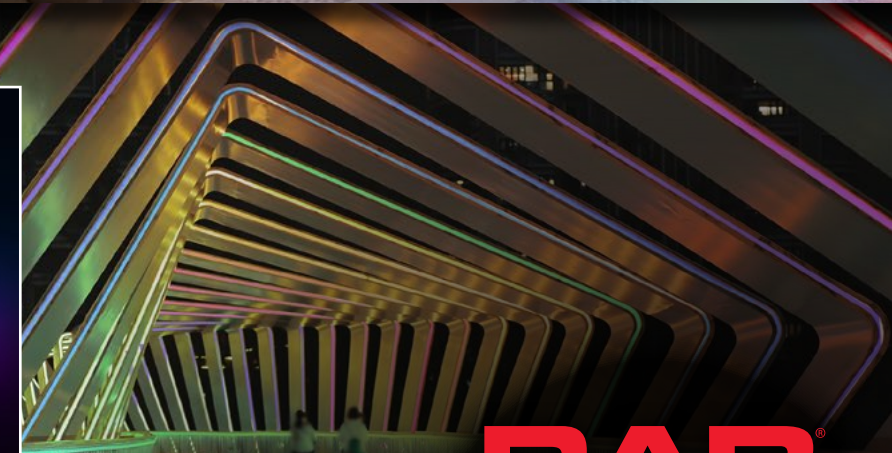

**RAB**



FEATURE PAGE



DRY RATED



FIELD CUTTABLE



32.8ft  
MAX RUN



DIMMING



FLICKER-FREE



24DC  
VOLTAGE



90 CRI



CAN BE USED TO COMPLY WITH  
TITLE PART 6  
24  
J.A.B.  
HIGH EFFICIENCY LIGHT SOURCE REQUIREMENTS



5  
YEAR  
LIMITED  
WARRANTY

RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty)



## Smooth, diffused light.

Available in 2700K, 3000K, 4000K, dim-to-warm (1800–3000K), and tunable white (2700–6500K) models, the ARCTAPE emits a continuous band of flawless, non-pixelated light with no hot spots...even if it's installed without a lens.

## Easy, tailored installs.

Because ARCTAPE is field-cuttable, you can customize each run to your exact needs and easily link sections using connectors (*sold separately*). Every model features a 3M® adhesive backing for quick peel-and-stick installation. Ideal for indirect lighting applications such as corridors, stairs, coves, handrails, skirtings, and more.

## Ordering Matrix

Product Family	CRI/Color Temperature	Input Voltage	IP Rating	Options
TIC				
Blank YY Y N	90 CRI, Tunable White 90 CRI, 2700K 90 CRI, 3000K 90 CRI, 4000K	Blank 24V DC	Blank IP20, Indoor	Blank /DW* /LCB** None Dim-to-Warm Lightcloud Blue

\*/DW is tunable 3000-1800K

\*\*/LCB is tunable white 2700-6500K using Lightcloud Blue



FEATURE PAGE



RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty)



### Easy, tailored installs.

Available in 2700K, 3000K, and 4000K, as well as tunable white (2700–6500K) and RGB models, FLEXTAPE offers versatile lighting for any application. Field-cutttable design allows you to customize runs on site, while RGB models unlock dynamic color-changing light shows with customizable effects and color sequences through the Lightcloud Blue mobile app. Every model includes a 3M® adhesive backing for quick, peel-and-stick installation.



### Waterproof design.

FLEXTAPE is IP67 rated and offers energy-efficient lighting that disappears into architecture while dramatically elevating its design.

## Ordering Matrix

Product Family	CRI/Color Temperature	Input Voltage	IP Rating	Options
TOS				
Blank	90 CRI, Tunable White 2700-6500K	Blank	IP67, Indoor/Outdoor	Blank /LCB* /RGB**
YY	90 CRI, 2700K	24V DC		None
Y	90 CRI, 3000K			Lightcloud Blue
N	90 CRI, 4000K			16+ Million Colors w/ Lightcloud Blue

\*LCB is tunable white 2700K-6500K using Lightcloud Blue  
 \*\*/RGB is tunable white 2200-3000K and 16+ million colors using Lightcloud Blue



FEATURE PAGE



IP RATING



FIELD CUTTABLE



16.4ft  
MAX RUN



DUAL BENDABLE



DIMMING



FLICKER-FREE



24DC VOLTAGE



90 CRI



CAN BE USED TO COMPLY WITH  
TITLE PART 6  
J.A.B.  
24  
MONTH RECYCLED LIGHT  
SOURCE REQUIREMENTS



5  
YEAR  
LIMITED  
WARRANTY

RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty)

# NEOFLEX



## Watch us flex.

NEOFLEX can be freely bent vertically or horizontally to create countless shapes and design expressions. Available in 3000K, tunable white (2700–6500K), and RGB models, it delivers smooth, diffuse illumination or dynamic RGB light shows with customizable effects and color sequences using the Lightcloud Blue mobile app. Its waterproof, silicone construction makes it ideal for both indoor and outdoor applications, while offering greater resistance to yellowing compared to PVC products.



## Waterproof design.

This flexible LED tape is IP67 rated and offers energy-efficient lighting that disappears into architecture while dramatically elevating its design.




## Cut to any length.

Get as precise as you need—NEOFLEX is field-cuttable, allowing you to customize runs on site for a clean, tailored fit.

## Ordering Matrix

Product Family	CRI/Color Temperature	Input Voltage	IP Rating	Options
TNF	Blank Y 90 CRI, Tunable White 2700-6500K* 90 CRI, 3000K	Blank 24V DC	Blank IP67, Indoor/Outdoor	Blank /LCB /RGB 16+ Million Colors w/ Lightcloud Blue None Lightcloud Blue

\*Only available with /LCB and /RGB models

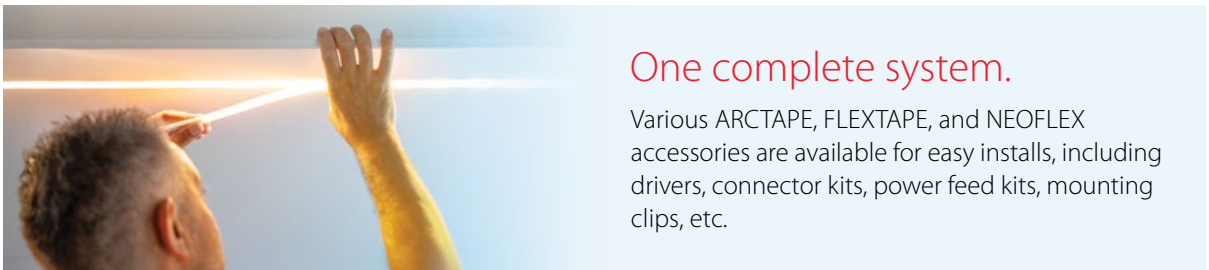

## One complete system.

Various ARCTAPE, FLEXTAPE, and NEOFLEX accessories are available for easy installs, including drivers, connector kits, power feed kits, mounting clips, etc.

## Build your smart tape light system.

To create a smart, tunable white or RGB tape light system, three components are required: a driver (power supply), a Lightcloud Blue controller, and the compatible RGB or tunable white LED tape light. All three must be purchased and installed together to create a complete, smart system with wireless control, dimming, and color tuning.



Driver



Lightcloud Blue Controller



Tape Light