

Extended. Expanded. Entirely new.

Our tape light portfolio has more options than ever!

PURELINE



NEOFLEX



ARCTAPE



FLEXTAPE




RAB



FEATURE PAGE



RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty

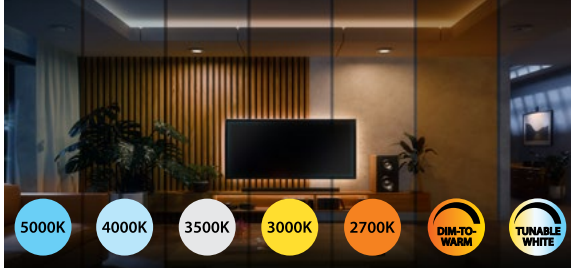

Smooth, diffused light.

Available in various CCTs, as well as high-output and tunable white (2700-6500K)* models, the ARCTAPE emits a continuous band of flawless, non-pixelated light with no hot spots...even if it's installed without a lens.

**Requires Lightcloud Blue Controller, sold separately.*

Easy, tailored installs.

Because ARCTAPE is field-cuttable, you can customize each run to your exact needs and easily link sections using connectors (sold separately). Every model features a 3M® adhesive backing for quick peel-and-stick installation. Ideal for indirect lighting applications such as corridors, stairs, coves, handrails, skirtings, and more.

Ordering Matrix

STATIC COLOR – STANDARD OUTPUT

Product Family	Length	Lumen Output	CRI/Color Temp	Input Voltage	IP Rating	Controls
TIC	Blank 32 ft L 100 ft	Blank Standard	YY 90 CRI, 2700K Y 90 CRI, 3000K YN 90 CRI, 3500K N 90 CRI, 4000K CW 90 CRI, 5000K	Blank 24V DC	Blank IP20, Indoor	Blank None

STATIC COLOR – HIGH-OUTPUT

Product Family	Length	Lumen Output	CRI/Color Temp	Input Voltage	IP Rating	Controls
TIC	Blank 16 ft	H High-Output	YY 90 CRI, 2700K Y 90 CRI, 3000K YN 90 CRI, 3500K N 90 CRI, 4000K CW 90 CRI, 5000K	Blank 24V DC	Blank IP20, Indoor	Blank None

DIM-TO-WARM – STANDARD OUTPUT

Product Family	Length	Lumen Output	CRI/Color Temp	Input Voltage	IP Rating	Controls
TIC	Blank 32 ft	Blank Standard	Blank 90 CRI, Tunable 3000-1800K*	Blank 24V DC	Blank IP20, Indoor	/DW Dim-to-Warm

TUNABLE WHITE – LIGHTCLOUD BLUE

Product Family	Length	Lumen Output	CRI/Color Temp	Input Voltage	IP Rating	Controls
TIC	Blank 16 ft	Blank Standard	Blank 90 CRI, Tunable 2700-6500K	Blank 24V DC	Blank IP20, Indoor	/LCB Lightcloud Blue**

**Requires dimmer (sold separately), CCT adjusts as you dim up or down. **Requires Lightcloud Blue Controller, sold separately*

FLEXTAPE



Easy, tailored installs.

Available in various CCTs, as well as high-output, tunable white (2700-6500K), and RGBW models, FLEXTAPE offers versatile lighting for any application. Field-cutable design allows you to customize runs on site, and every model includes a 3M® adhesive backing for quick, peel-and-stick installation.

Waterproof design.

FLEXTAPE is IP67 rated and offers energy-efficient lighting that disappears into architecture while dramatically elevating its design.



FEATURE PAGE



RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty

Ordering Matrix

STATIC COLOR – STANDARD OUTPUT

Product Family	Length	Lumen Output	CRI/Color Temp	Input Voltage	IP Rating	Controls
TOS	Blank 32 ft L 100 ft	Blank Standard	YY 90 CRI, 2700K Y 90 CRI, 3000K YN 90 CRI, 3500K N 90 CRI, 4000K CW 90 CRI, 5000K	Blank 24V DC	Blank IP67, Outdoor	Blank None

STATIC COLOR – HIGH-OUTPUT

Product Family	Length	Lumen Output	CRI/Color Temp	Input Voltage	IP Rating	Controls
TOS	Blank 16 ft H	High-Output	YY 90 CRI, 2700K Y 90 CRI, 3000K YN 90 CRI, 3500K N 90 CRI, 4000K CW 90 CRI, 5000K	Blank 24V DC	Blank IP67, Outdoor	Blank None

TUNABLE WHITE – LIGHTCLOUD BLUE


Product Family	Length	Lumen Output	CRI/Color Temp*	Input Voltage	IP Rating	Controls
TOS	Blank 16 ft	Blank Standard	Blank 90 CRI, Tunable Color Temperature	Blank 24V DC	Blank IP67, Outdoor	Blank Lightcloud Blue /LCB 16+ Million Colors /RGB w/Lightcloud Blue

*LCB is tunable white 2700K-6500K using Lightcloud Blue /RGB is tunable white 2200-3000K and 16+ million colors using Lightcloud Blue

NEOFLEX



FEATURE PAGE

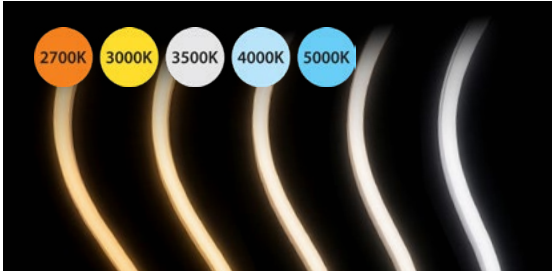

Watch us flex.

The NEOFLEX can be freely bent in any direction*, vertically or horizontally, to create countless shapes. It's made with UV-resistant silicone that is also waterproof, making it ideal for both indoor and outdoor applications.

**RGB models are top bend only*



Low-glare light for high-end use.

NEOFLEX is available in a low-glare model (3000K only) specifically designed for Human Centric Lighting (HCL) in upscale residential, retail, hospitality, and landscape applications when aesthetics matter most.



Field-cuttable.

Get as precise as you need—NEOFLEX is field-cuttable, allowing you to customize runs on site for a clean, tailored fit.

Ordering Matrix

STATIC COLOR

Product Family	Length	Lumen Output	CRI/Color Temp	Input Voltage	IP Rating	Controls
TNF	Blank 16 ft	Blank Standard LG* Low Glare	YY 90 CRI, 2700K Y 90 CRI, 3000K YN 90 CRI, 3500K N 90 CRI, 4000K CW 90 CRI, 5000K	Blank 24V DC	Blank IP67, Outdoor	Blank None

**LG models only available in 3000K*

TUNABLE WHITE – LIGHTCLOUD BLUE

Product Family	Length	Lumen Output	CRI/Color Temp*	Input Voltage	IP Rating	Controls
TNF	Blank 16 ft	Blank Standard	Blank 90 CRI, Tunable Color Temperature	Blank 24V DC	Blank IP67, Outdoor	/LCB /RGB Lightcloud Blue 16+ Million Colors w/Lightcloud Blue

***/LCB is tunable white 2700K-6500K using Lightcloud Blue /RGB is tunable white 2200-3000K and 16+ million colors using Lightcloud Blue*



RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty



FEATURE PAGE



IP RATING



FIELD CUTTABLE



DIMMING



FLICKER-FREE



24DC VOLTAGE



90 CRI



RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty



PURELINE



FIELD CUTTABLE



IP RATING




All the look, less of the spend.

PURELINE delivers the clean, continuous glow of a COB light source through a frosted, matte silicone coating that ensures a gorgeous, uniform, dot-free output...all at a price that keeps you in budget.



Five color temperatures, one easy choice.

PURELINE is available in various CCTs, so you can match it to virtually any space or ambiance. And with 90+ CRI output, it ensures that all your colors look true and natural.

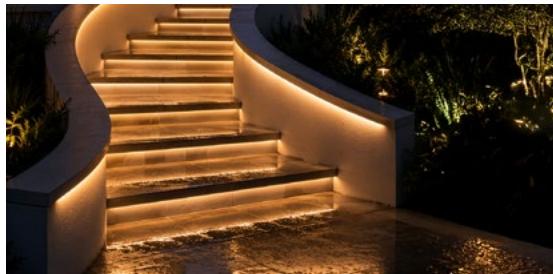


Ready for indoor & outdoor jobs.

An IP67 rating means PURELINE pulls double duty. Contours, corridors, handrails, staircases, landscapes, you name it — it can tackle all your interior and exterior applications.

Ordering Matrix

STATIC COLOR TEMPERATURE

Product Family	Length	Lumen Output	CRI/Color Temp	Input Voltage	IP Rating	Controls
TOC	Blank 16 ft	Blank Standard	YY 90 CRI, 2700K Y 90 CRI, 3000K YN 90 CRI, 3500K N 90 CRI, 4000K CW 90 CRI, 5000K	Blank 24V DC	Blank IP67, Outdoor	Blank None

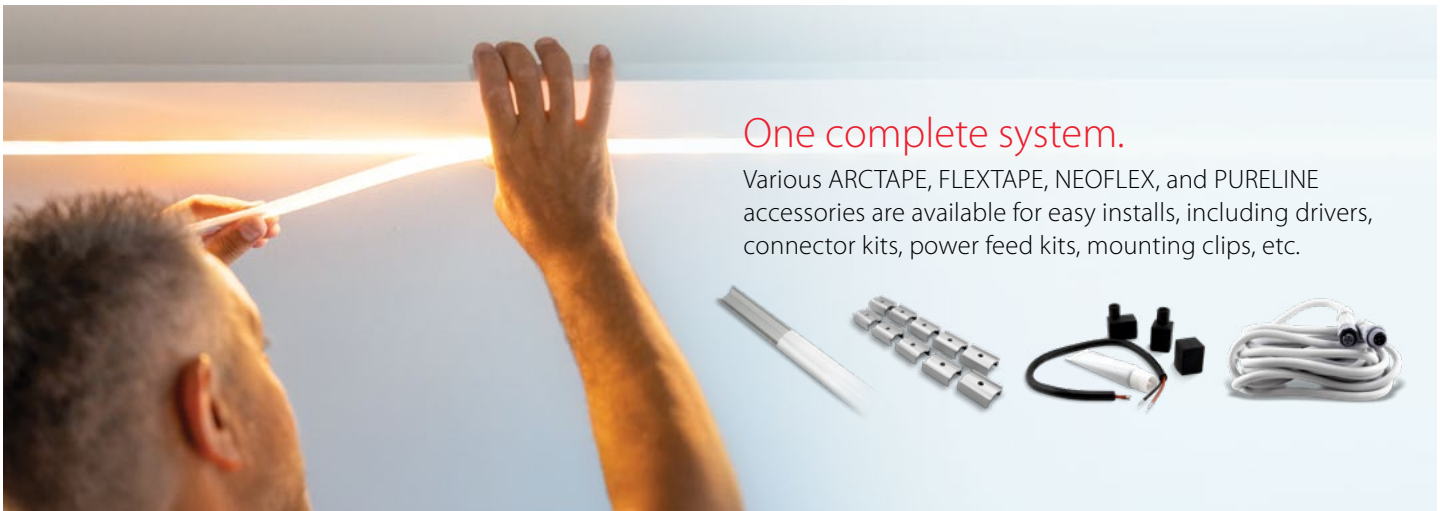


One complete system.

Various ARCTAPE, FLEXTAPE, NEOFLEX, and PURELINE accessories are available for easy installs, including drivers, connector kits, power feed kits, mounting clips, etc.

Build your smart tape light system.

Traditional tape light is limited by fixed run lengths — but a Lightcloud Blue controller changes that. Paired with a TND-96 driver and compatible tape, it unlocks longer runs than standard tape light alone, plus wireless dimming, tunable white, and dynamic RGB color sequences. Three components, one complete solution.

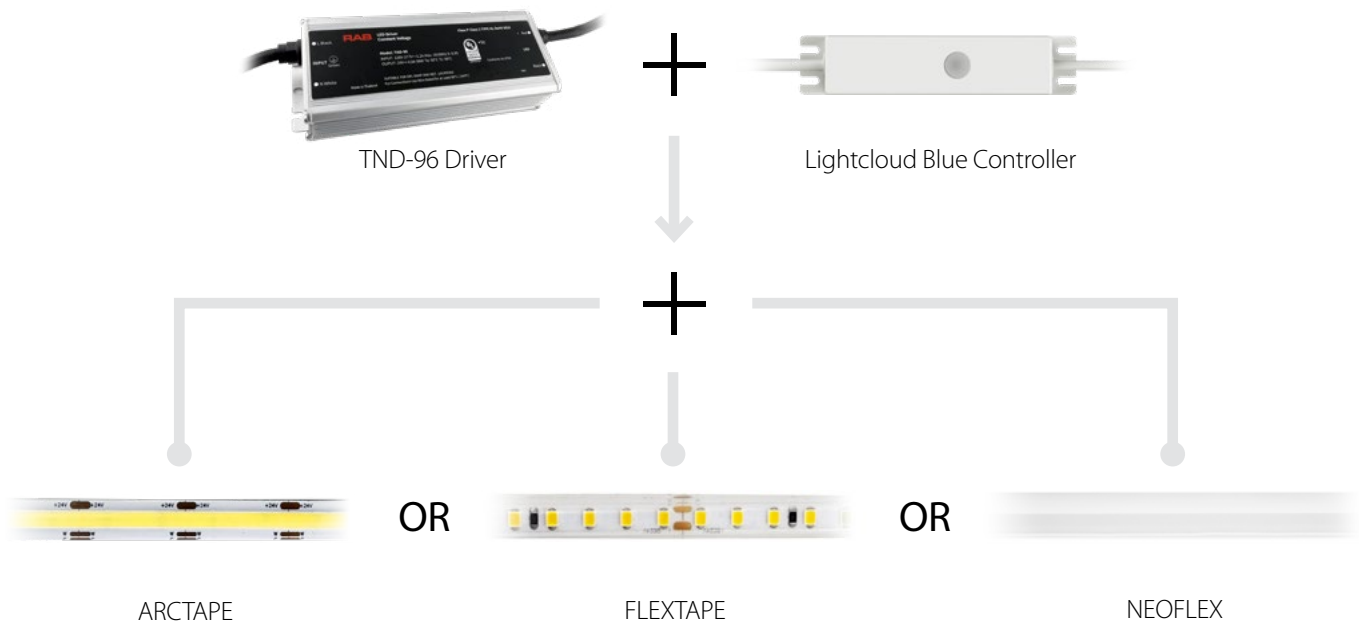

RAB®

rablighing.com | 1(888) 722-1000
 10 Broadway Rd, Cranbury, NJ 08512