

RAB®

VAN34




The next generation of canopy lighting.
The field-adjustable, budget-friendly VAN34.



Small package, big flexibility.

Designed to cover the footprint of old HID canopy lights, the VAN34 is available in one size that comes in three different field-adjustable power packages (each with selectable CCTs). It delivers the output your space needs, all with a super-slim profile.

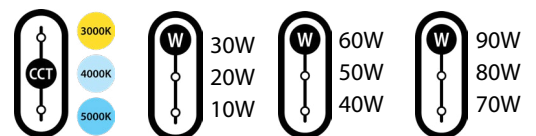



Feature Page



100,000-HOUR
LED LIFESPAN



120-277V



DIMMABLE




IP RATING



WET RATED



HE
HIGH
EFFICACY



ON/OFF PHOTOCELL



5-YEAR
LIMITED
WARRANTY

RAB's warranty is
subject to all terms
and conditions found at
rablighting.com/warranty




CLEAR FLAT LENS

FROSTED FLAT LENS

CLEAR DROP LENS

FROSTED DROP FROSTED

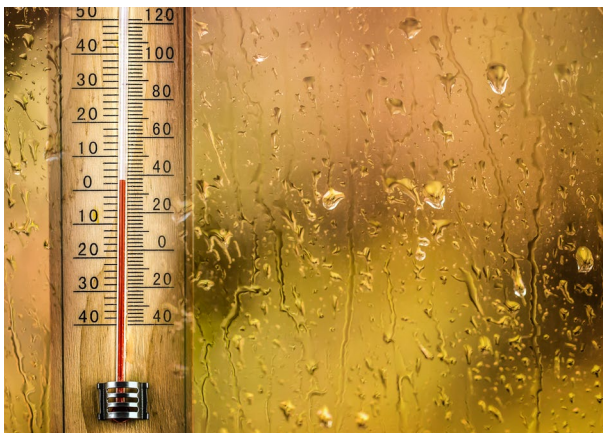

Designed to adapt.

The VAN34 is perfect for canopies, walkways, and entry areas where precise lighting matters. The family includes flat or drop lens options, in both clear and frosted models to dial in your light distribution and appearance. It's also compatible with our existing [VANLED RETROPLATES](#).



WHITE



BRONZE




CLEAR
LENS



FROSTED
LENS

Built for challenging environments.

The VAN34 thrives in demanding conditions with an IP65 rating and an operating range of -40°F to 104°F that ensures reliable performance year-round.

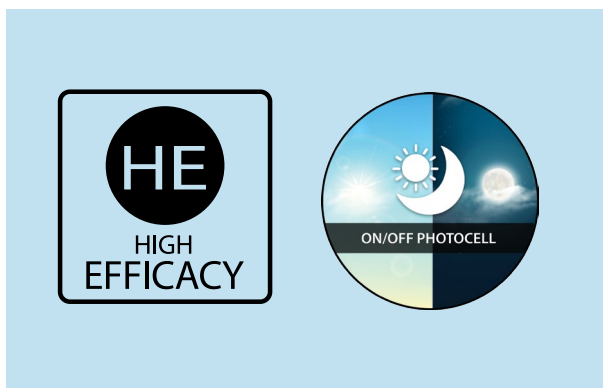

Energy savings = cost savings.

An integrated on/off photocell provides hassle-free, energy-saving operation and with an efficacy of up to 170 lm/w, the VAN34 does all it can to get those energy costs down!



Control options.

Various controls are available, including standard or Lightcloud Blue microwave sensors and a Lightcloud Controller. 120-277V models are also offered with a battery backup.

Ordering Matrix

Product Family	Wattage	Color Temp	Lens	Finish	Driver	Controls	Battery Backup
VAN34	-						
	30	30/20/10W	Blank	3000/4000/5000K CCT Adjustable	Blank	Drop Lens	Blank
	60	60/50/40W	F	Frosted Flat Lens	W	White	/E
	90	90/80/70W	FR	Frosted Drop Lens	/480	120-277V, 0-10V Dimming	None
			FFR	Frosted Flat Lens		480V, 0-10V Dimming	Battery Backup*
						Blank /MVS /LC /LCBS/MVS	
						On/Off Photocell Microwave Sensor	
						Lightcloud	
						Lightcloud Blue w/MVS Sensor	

*Available only in 120-277V