


RAB[®]

WFRX



When you need complete control.
WFRX with field-adjustable wattage and CCT.



WFRX
FEATURE PAGE



50,000-HOUR
LED LIFESPAN



120-277V



TRIAC/ELV



90 CRI



COMPLIANT



HIGH EFFICIENCY LED LIGHT
SOURCE REQUIREMENTS



CERTIFIED



5-YEAR
NO-COMPROMISE
LIMITED
WARRANTY

RAB's warranty is
subject to all terms
and conditions found at
rablighting.com/warranty

More options at your fingertips.


Designed for maximum flexibility, the WFRX family lets you change color temperature and wattage with the flick of a switch! Available in 4" and 6" models, they're ideal for new construction and retrofit applications.



W	12W	1100lm
	10W	825lm
	8W	675lm




W	15W	1500lm
	13W	1250lm
	11W	1000lm



Thoughtful design.

- A Edge-lit technology minimizes fixture depth
- B Spring-loaded retention clips
- C Frosted, diffusion lens for smooth output
- D Smooth or baffle trim
- E Gasketed to be airtight
- F IC-rated for direct contact with insulation
- G Remote driver eliminates need for a can
- H Lumen and CCT select switches integrated in driver box
- I FT5 Plenum-rated cable (per UL2043)

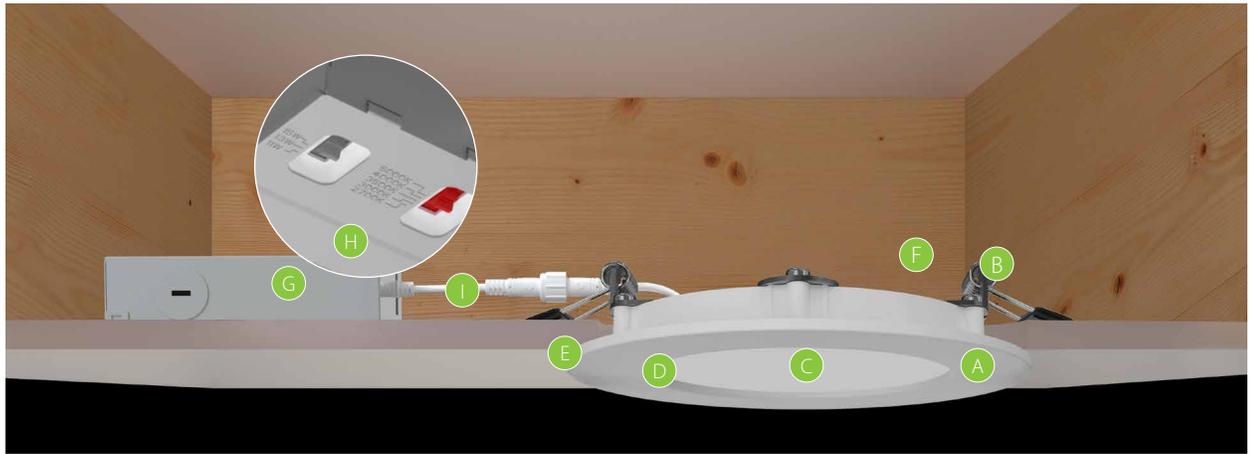

Anywhere you want it.

Rated for use in dry, damp, and wet locations, the WFRX is perfect for any application you throw at it, whether indoor or outdoor.

Ordering Matrix

Family	Size/Wattage	Shape	CRI/Color Temperature	Finish	Trim	Driver
WFRX						D
	4 4", 12/10/8W 6 6", 15/13/11W	Blank Round	Blank 90 CRI, 2700/3000/3500/4000/5000K CCT Adjustable	Blank White	Blank Smooth Baffle	D 120-277V, TRIAC Dimming