

More options at your fingertips.

This 2" wafer allows you to change CCT and wattage with the flick of a switch. Just one fixture is versatile enough for both accent lighting and downlighting, and it's ideal for either new construction or retrofit applications.



10W 900lm 700lm 520lm



The clean, high-end look.

Small aperture lights help create what's known as a "quiet ceiling" and add attractive, accent lighting without overwhelming a space. Commonly used to add a modern aesthetic, they are perfect for highlighting artwork and other attention grabbers.





WFRX2 FEATURE PAGE



50,000-HOUR LED LIFESPAN


















RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty

Thoughtful design.

- A Edge-lit technology minimizes fixture depth
- B Spring-loaded retention clips
- Frosted, diffusion lens for smooth output
- Smooth or baffle trim
- **(E)** Gasketed to be airtight

- IC-rated for direct contact with insulation
- G Remote driver eliminates need for a can
- Lumen and CCT select switches integrated in driver box
- FT5 Plenum-rated cable (per UL2043)

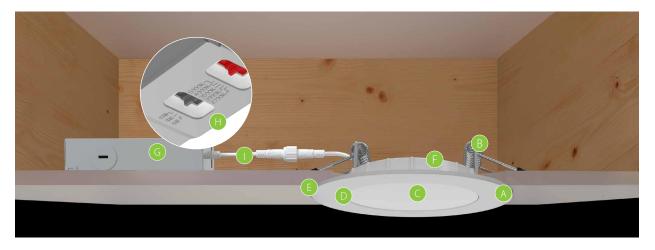

Anywhere you want it.

Rated for use in dry, damp, and wet locations, the WFRX is perfect for any application you throw at it, whether indoor or outdoor.





Ordering Matrix

Family	Size/Wattage		Shape		CRI/Color Temperature		Finish		Trim		Driver	
WFRX	_	2										
	2	2", 10/8/6W	Blank	Round	Blank	90 CRI, 2700/3000/3500/4000/5000K CCT Adjustable		White	Blank	Smooth	Blank	120V