


RAB®

WFRX2



Small aperture with big output.

2" Wafer downlight with field-adjustable wattage and CCT.

More options at your fingertips.

This 2" wafer allows you to change CCT and wattage with the flick of a switch. Just one fixture is versatile enough for both accent lighting and downlighting, and it's ideal for either new construction or retrofit applications.



10W	900lm
8W	700lm
6W	520lm

The clean, high-end look.

Small aperture lights help create what's known as a "quiet ceiling" and add attractive, accent lighting without overwhelming a space. Commonly used to add a modern aesthetic, they are perfect for highlighting artwork and other attention grabbers.





WFRX2
FEATURE PAGE




50,000-HOUR
LED LIFESPAN



RAB's warranty is
subject to all terms
and conditions found at
rablighting.com/warranty

Thoughtful design.

- A Edge-lit technology minimizes fixture depth
- B Spring-loaded retention clips
- C Frosted, diffusion lens for smooth output
- D Smooth or baffle trim
- E Gasketed to be airtight
- F IC-rated for direct contact with insulation
- G Remote driver eliminates need for a can
- H Lumen and CCT select switches integrated in driver box
- I FT5 Plenum-rated cable (per UL2043)

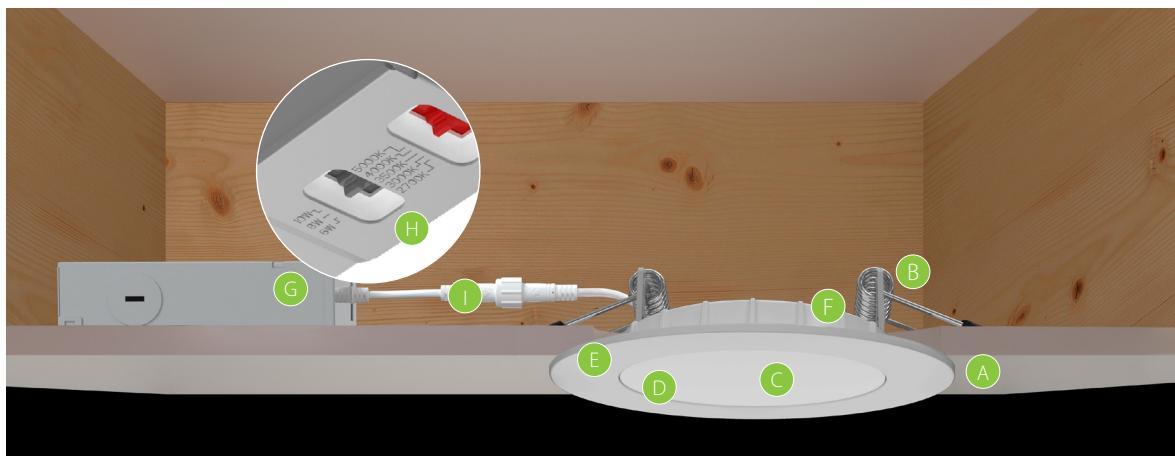

Anywhere you want it.

Rated for use in dry, damp, and wet locations, the WFRX is perfect for any application you throw at it, whether indoor or outdoor.



Ordering Matrix

Family	Size/Wattage	Shape	CRI/Color Temperature	Finish	Trim	Driver
WFRX	2	2", 10/8/6W Blank	Blank Round Blank 2700/3000/3500/4000/5000K CCT Adjustable	Blank Blank White	Blank B Smooth Baffle	Blank 120V

