




Ultra-economy area lighting.

The options you want at the price you need.

Available from 70W through 375W models, and with four IES distributions and numerous control options, the A17 gives you the right light for the right application, all without breaking the budget.

7 Lumen Packages

The A17 is available in everything from 10,000 lumens to up to 53,700 lumens, while leading competitors only offer up to 5 lumen packages.

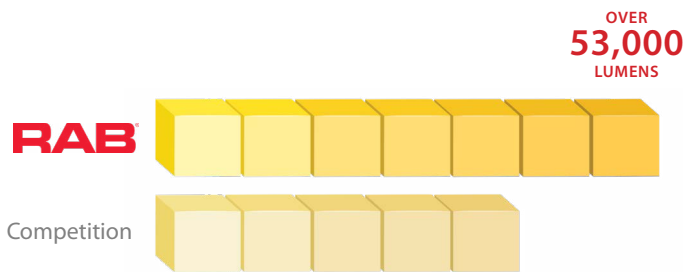

Consistently High Efficacy

Not only does the A17 offer an ultra-high efficacy of up to 153 lm/W, but it delivers high efficacy throughout its entire portfolio.



Mounting Flexibility

With several mounting options available, the A17 can be used throughout various areas for one unified look: parking lots, building façades, adjacent walkways, etc.

OPTIONAL MOUNTING ACCESSORIES



Comes standard with Universal Pole Mount



Wall Mount
A17-WM



Slipfitter
A17-SF-KIT



Adjustable Universal
Pole Mount
A17-ADJ-KIT

△0-35°

3-WAY ADJUSTABLE (XFU)

Color Adjustable



Power Adjustable



Selectable Photocell



Control Accessories

All A17 models are available with various control options and accessories to help qualify for additional utility rebates.

* Remote control required for managing settings of the microwave sensor (A17 with MVS sensor only).



Twistlock Photocell
RPCT (120-277V)
RPCT-480 (480V)



Remote for Microwave Sensor*
REMOTE-OD

Reversible House Side Shields



A17-RHS1
(up to 150W)



A17-RHS2
(200W and up)

Ordering Matrices

STANDARD A17

| Family | Distribution* | Wattage | Mounting** | Color Temp | Driver | Control Options |
|--------|--|---|---|---|--|---|
| A17 | 3T Type III 4T Type IV 5T Type V | 70 70W/10,000LM 100 100W/15,000LM 150 150W/22,500LM 200 200W/30,000LM 240 240W/36,000LM 300 300W/45,000LM 375 375W/51,800LM | Blank Universal Pole Mount SF Slipfitter (150W only) | Blank 5000K (Cool) N 4000K (Neutral) | Blank 120-277V, 0-10V Dimming /480 480V***, 0-10V Dimming | Blank No Sensor /3PRS 3-Pin Receptacle & Shorting Cap /7PRS 7-Pin Receptacle & Shorting Cap /MVS Microwave Motion Sensor /LC Lightcloud® Controller**** |

* Type II distribution available as special order.

** Wall mount and adjustable universal pole mount available as optional field-installed accessories.

*** 480V driver available standard on 150W and 300W. All other models are special order.

**** Lightcloud® Controller available only in 120-277V.

3-WAY ADJUSTABLE A17

| Family | Wattage | Control Options |
|--------|-------------------|---|
| A17XFU | 150 | |
| | 150 70W/100W/150W | Blank No Sensor /LC Lightcloud® Controller |

Note: The A17XFU comes standard with an Adjustable Universal Pole Mount.



100,000 HOUR
LED LIFESPAN

IP65
RATING



0-10V
DIMMING



FIELD
ADJUSTABLE



5-YEAR, LIMITED
WARRANTY

RAB's warranty is
subject to all terms
and conditions found at
rablighting.com/warranty