


# Ultra-economy area lighting.

The options you want at the price you need.

Available from 70W through 375W models, and with four IES distributions and numerous control options, the A17 gives you the right light for the right application, all without breaking the budget.

## 7 Lumen Packages

The A17 is available in everything from 10,000 lumens to up to 53,700 lumens, while leading competitors only offer up to 5 lumen packages.

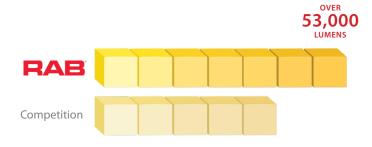

### Consistently High Efficacy

Not only does the A17 offer an ultra-high efficacy of up to 153 lm/W, but it delivers high efficacy throughout its entire portfolio.



#### Mounting Flexibility

With several mounting options available, the A17 can be used throughout various areas for one unified look: parking lots, building façades, adjacent walkways, etc.



Comes standard with Universal Pole Mount



Wall Mount A17-WM





Slipfitter

A17-SF-KIT



Adjustable Universal Pole Mount A17-ADJ-KIT

#### 3-WAY ADJUSTABLE (XFU)



Color Adjustable

Power Adjustable









0-10V

DIMMING

FIELD

ADJUSTABLE

# Control Accessories

All A17 models are available with various control options and accessories to help qualify for additional utility rebates.

\* Remote control required for managing settings of the microwave sensor (A17 with MVS sensor only).







RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty

#### Reversible House Side Shields



A17-RHS1 (up to 150W)

# A17-RHS2

(200W and up)

#### Ordering Matrices

| Family     | Distribut | ion*                  | Wattage   | Mounting**  | Color Temp  | Driver  | Control Options  |
|------------|-----------|-----------------------|---|---|---|---|--|
| A17 —      | -         |                       |   |   |   |   |  |
|            | 4T Typ    | beV 150<br>200<br>240 | <ul> <li>150W/22,500LM</li> <li>200W/30,000LM</li> <li>240W/36,000LM</li> </ul> | Blank Universal Pole Mount<br>SF Slipfitter (150W only) | Blank 5000K (Cool)<br>N 4000K (Neutral)   | Blank 120-277V, 0-10V Dimming<br>/480 480V***, 0-10VDimming | Blank         No Sensor           /3PRS         3-Pin Receptacle & Shorting Cap           /7PRS         7-Pin Receptacle & Shorting Cap           /MVS         Microwave Motion Sensor |
|            |           | 300<br>375            |   |   | * Type II distribution available as special order.<br>**Wall mount and adjustable universal pole mount available as optional field-installed accessories.<br>*** 480V driver available standard on 150W and 300W. All other models are special order. |   |  |
| 3-WAY ADJU | JSTABLE A | 17                    |   |   |   |   |  |
| Family     | Wattage   |                       |   |   |   |   |  |
| A17XFU     |           | 150                   |   |   |   |   |  |

Note: The A17XFU comes standard with an Adjustable Universal Pole Mount.

150 70W/100W/150W