

Field-Adjustable Surface Mount



CRVFAS



CRVFAD

PROJECT:

DATE:

TYPE:

PREPARED BY:



KEY FEATURES

- Surface mount to ceiling or wall
- Available in multiple sizes: 11", 12", 14", 18" and 19"
- Field-adjustable "set and forget" color temperature
- Diffused lens provides soft, smooth light
- Optional brushed nickel decorative ring
- Ideal for hospitality and multi-family residential applications
- **Triac and 0-10V dimming** options
- Available with integrated microwave motion sensors
- Suitable for wet locations
- **50,000-Hour** lifespan

Stylish, versatile surface mount fixtures



PERFORMANCE

Catalog Number	Size	Equivalency	Input Wattage	Input Voltage	Lumens	Efficacy	Color Temperature	CRI	Dim Type	Sensor	L70 Lifespan
CRVFAS-11R-16-9CCT-120-W	11"	75W	16W	120V	1150	72	2700/3000/3500/4000/5000K	90	Triac	No	50,000
CRVFAS-14R-20-9CCT-120-W	14"	125W	20W	120V	1500	75	2700/3000/3500/4000/5000K	90	Triac	No	50,000
CRVFAS-19R-32-9CCT-120-W	19"	150W	32W	120V	2450	77	2700/3000/3500/4000/5000K	90	Triac	No	50,000
CRVFAS-11R-16-9CCT-UNV-W/MVS	11"	75W	16W	120-277V	1150	72	2700/3000/3500/4000/5000K	90	N/A	Microwave	50,000
CRVFAS-14R-20-9CCT-UNV-W/MVS	14"	125W	20W	120-277V	1500	75	2700/3000/3500/4000/5000K	90	N/A	Microwave	50,000
CRVFAS-19R-32-9CCT-UNV-W/MVS	19"	150W	32W	120-277V	2450	77	2700/3000/3500/4000/5000K	90	N/A	Microwave	50,000
CRVFAD-12R-16-9CCT-120-BN	12"	75W	16W	120V	1100	69	2700/3000/3500/4000/5000K	90	Triac	No	50,000
CRVFAD-14R-20-9CCT-120-BN	14"	125W	20W	120V	1400	70	2700/3000/3500/4000/5000K	90	Triac	No	50,000
CRVFAD-18R-32-9CCT-120-BN	18"	150W	32W	120V	2200	69	2700/3000/3500/4000/5000K	90	Triac	No	50,000
CRVFAD-12R-16-9CCT-UNV-BN/MVS	12"	75W	16W	120-277V	1100	69	2700/3000/3500/4000/5000K	90	N/A	Microwave	50,000
CRVFAD-14R-20-9CCT-UNV-BN/MVS	14"	125W	20W	120-277V	1400	70	2700/3000/3500/4000/5000K	90	N/A	Microwave	50,000
CRVFAD-18R-32-9CCT-UNV-BN/MVS	18"	150W	32W	120-277V	2200	69	2700/3000/3500/4000/5000K	90	N/A	Microwave	50,000

Field-Adjustable Surface Mount



TECHNICAL SPECIFICATIONS

CONSTRUCTION

Product Type Curve Field-Adjustable Surface mount	Lens Polycarbonate
Fixture Shape Round	Trim Style Smooth
Enclosure Material CRVFAS - Plastic CRVFAD - Metal+plastic	Beam Angle CRVFAS - 120° CRVFAD - 130°
Fixture Finish CRVFAS - White CRVFAD - Brushed Nickel	

INSTALLATION

Mounting
Surface mount directly to junction box

ELECTRICAL

THD
≤20%

Power Factor
≥0.9

Input Voltage
120V, 120V-277V

Operating Frequency
60HZ, 50/60Hz

Operating Temperature
-4°F to 104°F (-20°C to 40°C)

Note
All values are typical (tolerance +/- 10%)

COMPLIANCE

Safety Listing
UL Listed

Environment Rating
Wet

IP Rating
IP64

Energy Star Compliant
Yes

T24 JA8 Compliant
Can be used to conform with the requirements of California Title 24 Part 6

FCC
Complies with Part 15 of the FCC Rules.

RoHS
Mercury and UV free. RoHS-compliant components.


OTHER

Warranty
RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish.

RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.



DIMENSIONS

CRVFAS 16/20/32W

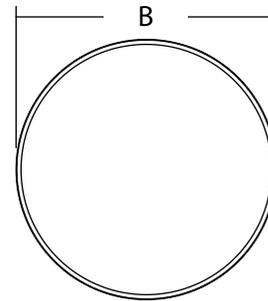

CRVFAS	Weight	A	B
16W	1.8 lbs	3 5/16"	11"
20W	2.7 lbs	3 5/16"	14"
32W	4.4 lbs	3 5/16"	19"

CRVFAD 16/20/32W

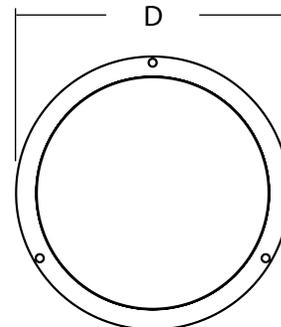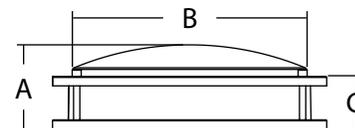

CRVFAD	Weight	A	B	C	D
16W	2 lbs	3 3/4"	10 1/4"	2 3/8"	12"
20W	2.4 lbs	3 15/16"	12 1/4"	2 3/8"	14"
32W	4.4 lbs	4 3/8"	16 3/16"	2 1/2"	17 3/4"

Field-Adjustable Surface Mount



ORDERING INFO

Catalog Number	Model Number (Energy Star)	UPC	Case Pack
CRVFAS-11R-16-9CCT-120-W	DLS0096(CRVFAS-11R-16-9CCT-120-W)	192552013253	4
CRVFAS-14R-20-9CCT-120-W	DLS0097(CRVFAS-14R-20-9CCT-120-W)	192552013260	2
CRVFAS-19R-32-9CCT-120-W	DLS0098(CRVFAS-19R-32-9CCT-120-W)	192552013277	2
CRVFAS-11R-16-9CCT-UNV-W/MVS	DLS0099(CRVFAS-11R-16-9CCT-UNV-W/MVS)	192552013284	4
CRVFAS-14R-20-9CCT-UNV-W/MVS	DLS0100(CRVFAS-14R-20-9CCT-UNV-W/MVS)	192552013291	2
CRVFAS-19R-32-9CCT-UNV-W/MVS	DLS0101(CRVFAS-19R-32-9CCT-UNV-W/MVS)	192552013307	2
CRVFAD-12R-16-9CCT-120-BN	DLS0102(CRVFAD-12R-16-9CCT-120-BN)	192552003223	2
CRVFAD-14R-20-9CCT-120-BN	DLS0103(CRVFAD-14R-20-9CCT-120-BN)	192552013321	2
CRVFAD-18R-32-9CCT-120-BN	DLS0104(CRVFAD-18R-32-9CCT-120-BN)	192552003230	2
CRVFAD-12R-16-9CCT-UNV-BN/MVS	DLS0105(CRVFAD-12R-16-9CCT-UNV-BN/MVS)	192552003247	2
CRVFAD-14R-20-9CCT-UNV-BN/MVS	DLS0106(CRVFAD-14R-20-9CCT-UNV-BN/MVS)	192552013352	2
CRVFAD-18R-32-9CCT-UNV-BN/MVS	DLS0107(CRVFAD-18R-32-9CCT-UNV-BN/MVS)	192552003254	2

ORDERING MATRIX

Family	Size	Shape	Wattage	CRI/Color Temp	Voltage	Fixture Finish	Sensor
CRVFAS	-	R	-	9CCT	-	W	
	19 19"	R Round	32 32W	9CCT 90 CRI, CCT Selectable	120 120V	W White	Blank No sensor
	14 14"		20 20W		UNV 120V-277V		/MVS Microwave Sensor
	11 11"		16 16W				

Family	Size	Shape	Wattage	CRI/Color Temp	Voltage	Fixture Finish	Sensor
CRVFAD	-	R	-	9CCT	-	BN	
	18 18"	R Round	32 32W	9CCT 90 CRI, CCT Selectable	120 120V	BN Brushed Nickel	Blank No sensor
	14 14"		20 20W		UNV 120V-277V		/MVS Microwave Sensor
	12 12"		16 16W				