

Glass, Field-Adjustable T8 Hybrid



4 ft, 3 ft, 2 ft T8 Hybrid UL Type A/B,
CCT-Adjustable, Glass



GLASS



SINGLE-DOUBLE
ENDED



FIELD
ADJUSTABLE



80 CRI



50,000
HOURS



120-277V



DAMP
RATED



ENCLOSED
FIXTURE
RATED



HYBRID

PROJECT: _____

DATE: _____

TYPE: _____

PREPARED BY: _____



KEY FEATURES

- Direct replacement for fluorescent lamps: F32T8/32W, F32T8/30W, F32T8/28W, F32T8/25W
- TYPE A - plug-and-play compatible with most common commercial T8 electronic ballasts
- TYPE B - can be wired directly to line voltage 120-277V. Can be wired using single- or double-ended method
- Works with both **shunted** and **non-shunted** sockets
- **5 color temperatures in 1 SKU** (3000/3500/4000/5000/6500K)
- **50,000-Hour** lifespan

PERFORMANCE

Catalog Number	Length	Wattage Equivalency	Input Wattage	Lumens	Efficacy	Input Voltage	Color Temperature	DLC ID
T8-10.5-48G-8CCT-HYB	4 ft	32W Fluorescent	12W	1,650 lm	138 lm/W	Type A: Ballast dependent Type B: 120-277V	Field-adjustable via dip switch 3000/3500/4000/ 5000/6500K	S-4WQKWM
T8-12-48G-8CCT-HYB	4 ft	32W Fluorescent	12W	1,650 lm	138 lm/W			S-0GTH45
T8-15-48G-8CCT-HYB	4 ft	32W Fluorescent	15W	2,100 lm	140 lm/W			S-CONSAX
T8-15-48G-8CCT-HYB-C	4 ft	32W Fluorescent	16.5W	2,150 lm	130 lm/W			N/A
T8-7.5-24G-8CCT-HYB	2 ft	17W Fluorescent	7.5W	1,150 lm	153 lm/W			S-T4JAPF
T8-11-36G-8CCT-HYB	3 ft	25W Fluorescent	11W	1,500 lm	136 lm/W			S-YAUBC3

Glass, Field-Adjustable T8 Hybrid



Catalog Number	Lamp Wattage Type B (W)	System Wattage with Ballast Type A (W)	CCT (K)	Lumens (lm)	Efficacy (lm/W)	Equivalency Wattage (W)
T8-10.5-48G-8CCT-HYB	10.5W	13.4W	3000K	1,677	115	32W Fluorescent
			3500K	1,708	117	
			4000K	1,737	119	
			5000K	1,758	120	
			6500K	1,742	119	
T8-12-48G-8CCT-HYB	11.3W	12.9W	3000K	1,600	141	32W Fluorescent
			3500K	1,647	146	
			4000K	1,663	147	
			5000K	1,679	148	
			6500K	1,609	142	
T8-15-48G-8CCT-HYB	14.6W	16.5W	3000K	2,124	145	32W Fluorescent
			3500K	2,186	149	
			4000K	2,200	150	
			5000K	2,218	151	
			6500K	2,133	146	
T8-15-48G-8CCT-HYB-C	15W	17.6W	3000K	2,153	144	32W Fluorescent
			3500K	2,253	151	
			4000K	2,306	154	
			5000K	2,317	155	
			6500K	2,212	148	
T8-7.5-24G-8CCT-HYB	7.7W	8.8W	3000K	1,081	140	17W Fluorescent
			3500K	1,111	144	
			4000K	1,133	147	
			5000K	1,146	149	
			6500K	1,137	148	
T8-11-36G-8CCT-HYB	10.8W	12.2W	3000K	1,527	141	25W Fluorescent
			3500K	1,580	146	
			4000K	1,612	149	
			5000K	1,636	151	
			6500K	1,612	149	

TECHNICAL SPECIFICATIONS

CONSTRUCTION

Product Type

T8 UL Type A/B - Glass

Length

2 ft, 3 ft, 4 ft

Shape

T8

Enclosure Material

Frosted Glass

Endcap Material

Plastic

Finish

Frosted white lens

INSTALLATION

Installation Method

UL Type A+B, Hybrid

Base Type

G13

ELECTRICAL

Dimmable

Type B: Triac Dimming @ 120V only with compatible dimmers

Type A: 0-10V dimming with compatible dimmable fluorescent ballast and 0-10V Dimmer

Driver

Constant Power 120-277V; 50/60 Hz

Input Voltage

120-277V

Operating Frequency

50/60 Hz

Operating Temperature

-4°F to 113°F (-20°C to 45°C)

THD

≤25%

Power Factor

>0.9

Flicker

<40%

LED CHARACTERISTICS

Beam Angle

220°

Color Temperature

Field-adjustable via dip switch 3000/3500/4000/5000/6500K

Color Accuracy (CRI)

>80

State Lighting (SSL) Products, ANSI C78.377-2017.

LED CHARACTERISTICS (CONT'D.)

R9 Value

High color performance with R9 greater than 0

Color Consistency

<7-step MacAdam Ellipse binning to achieve consistent fixture-to-fixture color

Color Stability

LED color temperature is warrantied to shift no more than 200K in color temperature over a 5-year period

Color Uniformity

RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

COMPLIANCE

Listings

UL Listed, UL Classified

Environment

Suitable for use indoors in dry and damp environments.

Fixture Rating

Suitable for use in enclosed fixtures

DLC

This product is on the Design Lights Consortium (DLC) Qualified Products List and is eligible for rebates from DLC Member Utilities. Designed to meet DLC 5.1 requirements.

California Energy Commission (CEC) Status

Lawful for Sale in California

NSF Listed

Meets NSF/ANSI standards for use in Food Zone (non-contact), Splash, and Non-Food Zones. Tube guard required in open fixtures.

RoHS

Mercury and UV free. RoHS-compliant components.

FCC

Complies with Part 15 of the FCC Rules.

OTHER

Warranty

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish.


RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Glass, Field-Adjustable T8 Hybrid



DIMENSIONS

T8 Hybrid field-adjustable tube

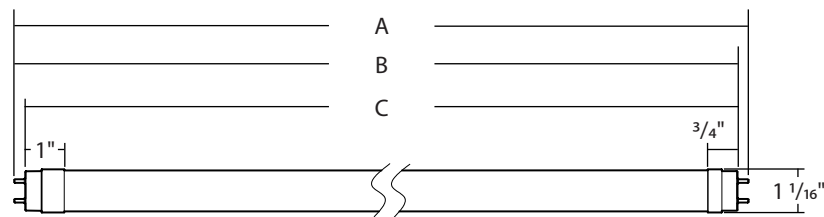

Catalog Number	Length	Weight	A	B	C
T8-7.5-24G-8CCT-HYB	2 ft	0.26lb	23 3/4"	23 7/16"	23 3/16"
T8-11-36G-8CCT-HYB	3 ft	0.35lb	35 3/4"	35 7/16"	35 3/16"
T8-10.5-48G-8CCT-HYB	4 ft	0.41lb	47 3/4"	47 7/16"	47 3/16"
T8-12-48G-8CCT-HYB					
T8-15-48G-8CCT-HYB					
T8-15-48G-8CCT-HYB-C					

ACCESSORIES



DRI-10-EMGR-TYPE B



DRI-5-EMGR-T8

Catalog Number	UPC	Description
DRI-10-EMGR-TYPE B	192552000338	10W Emergency Driver Type B DE or SE
DRI-5-EMGR-T8	019813834467	5W Emergency Driver Type B DE or SE

ORDERING INFO

Catalog Number	Model Number	UPC	Case Pack
T8-12-48G-8CCT-HYB	T10370(T8-12-48G-8CCT-HYB)	192552024587	25
T8-15-48G-8CCT-HYB	T10371(T8-15-48G-8CCT-HYB)	192552024594	25
T8-7.5-24G-8CCT-HYB	T10384(T8-7.5-24G-8CCT-HYB)	192552027922	25
T8-11-36G-8CCT-HYB	T10385(T8-11-36G-8CCT-HYB)	192552027939	25
T8-15-48G-8CCT-HYB-C	T10298(T8-15-48G-8CCT-HYB-C)	192552024587	25
T8-10.5-48G-8CCT-HYB	T10299(T8-10.5-48G-8CCT-HYB)	192552024594	25

Glass, Field-Adjustable T8 Hybrid



ORDERING MATRIX

Family	Wattage	Length/ Material	CRI/Color Temp	Voltage	Wiring Method	Installation Type	Lens Finish
T8	-	-	8CCT			HYB	-
	7.5 7.5W (2 ft)	24G 2 ft, Glass	8CCT 80CRI, CCT Adjustable	Blank 120-277V	Blank Single & Double Ended	HYB Hybrid	Blank Frosted
	10.5 10.5W (4 ft)	36G 3 ft, Glass	3000/3500/4000/5000/6500K			C	Clear
	11 11W (3 ft)	48G 4 ft, Glass					
	12 12W (4 ft)						
	15 15W (4 ft)						

T8 Hybrid Field-Adjustable Ballast Compatibility List



High Frequency (Electronics) Ballast Description				Compatibility Results			
Ballast Brand	Part Number	Start Method	Number of Lamps	N Lamp		N-1 Lamp	
		PS/IS/RS/PRS	1/2/3/4	120	277	120	277
Philips Advance	ICN-1P32-N	IS	1	C	C	N/A	N/A
Philips Advance	ICN-2P32-N	IS	2	C	C	C	C
Philips Advance	ICN-3P32-N	IS	3	C	C	C	C
Philips Advance	ICN-4P32-N	IS	4	C	C	C	C
Philips Advance	IOPA-1P32-N	IS	1	C	C	N/A	N/A
Philips Advance	IOPA-2P32-N	IS	2	C	C	C	C
Philips Advance	IOPA-3P32-N	IS	3	C	C	C	C
Philips Advance	IOPA-4P32-N	IS	4	C	C	C	C
Philips Advance	IOPA-1P32-LW-N	IS	1	C	C	N/A	N/A
Philips Advance	IOPA-2P32-LW-N	IS	2	C	C	C	C
Philips Advance	IOPA-3P32-LW-N	IS	3	C	C	C	C
Philips Advance	IOPA-4P32-LW-N	IS	4	C	C	C	C
Philips Advance	IOPA-1P32-HL-N	IS	1	C	C		
Philips Advance	IOPA-2P32-HL-N	IS	2	C	C	C	C
Philips Advance	IOP-2P32-N	IS	2	C	C	C	C
Philips Advance	IOP-4P32-N	IS	4	C	C	C	C
Philips Advance	IOP-2P32-LW-N	IS	2	C	C	C	C
Philips Advance	IOP-2P32-HL-N	IS	2	C	C	C	C
Philips Advance	IOP-4P32-HL-SC	IS	4	C	C	C	C
Universal Lighting	B132IUNVHP-N	IS	1	C	C	N/A	N/A
Universal Lighting	B232IUNVHP-N	IS	2	C	C	C	C
Universal Lighting	B332IUNVHP-A	IS	3	C	C	C	C
Universal Lighting	B432IUNVHP-A	IS	4	C	C	C	C
Universal Lighting	B232IUNVHE-A	IS	3	C	C	C	C
Universal Lighting	B332IUNVHE-A	IS	3	C	C	C	C
Universal Lighting	B432IUNVHE-A	IS	4	C	C	C	C
Universal Lighting	B232IUNVEL-A	IS	2	C	C	C	C
Universal Lighting	B432IUNVEL-A	IS	4	C	C	C	C
Universal Lighting	B232IUNVHEH-A	IS	2	C	C	C	C
General Electric	GE-232-MV-N-DIY	IS	2	C	C	C	C
General Electric	GE-432-MV-N-DIY	IS	4	C	C	C	C
General Electric	GE232MAX-N/ULTRA	IS	2	C	C	C	C
General Electric	GE332MAX-N/ULTRA	IS	3	C	C	C	C
Osram Sylvania	QTP 1X32T8/UNV ISN-SC	IS	1	C	C	N/A	N/A
Osram Sylvania	QTP 2X32T8/UNV ISN-SC	IS	2	C	C	C	C
Osram Sylvania	QTP 3X32T8/UNV ISN-SC	IS	3	C	C	C	C
Osram Sylvania	QTP 4X32T8/UNV ISN-SC	IS	4	C	C	C	C
Osram Sylvania	QTP 2X32T8/347 ISN-SC	IS	2	C	C	C	C
Osram Sylvania	QHE 2X32T8/UNV ISN-SC	IS	2	C	C	C	C

KEY: C = Compatible N/A = Not applicable N = Not Compatible

T8 Hybrid Field-Adjustable

Ballast Compatibility List (cont'd.)



High Frequency (Electronics) Ballast Description				Compatibility Results			
Ballast Brand	Part Number	Start Method	Number of Lamps	N Lamp		N-1 Lamp	
		PS/IS/RS/PRS	1/2/3/4	120	277	120	277
Osram Sylvania	QHE 3x32T8/UNV ISN-SC	IS	3	C	C	C	C
Osram Sylvania	QHE 4X32T8/UNV ISN-SC	IS	4	C	C	C	C
Osram Sylvania	QHE 2X32T8/UNV ISL-SC	IS	2	C	C	C	C
Osram Sylvania	QHE 3x32T8/UNV ISL-SC	IS	3	C	C	C	C
Osram Sylvania	QHE 4X32T8/UNV ISL-SC	IS	4	C	C	C	C
Osram Sylvania	QHE 2x32T8/UNV ISH-SC	IS	2	C	C	C	C
Osram Sylvania	QHE 4x32T8/UNV ISH	IS	4	C	C	C	C
Osram Sylvania	QHE 1X32T8/UNV ISH HT SC	IS	1	C	C	N/A	N/A
Osram Sylvania	QHE 2X32T8/UNV ISH HT SC	IS	2	C	C	C	C
Osram Sylvania	QHE 3x32T8/UNV ISL-SC-1	IS	3	C	C	C	C
Osram Sylvania	QHE 4x32T8/UNV ISL-SC-1	IS	4	C	C	C	C
Philips Advance	REB-2P32-N	IS	2	C	N/A	C	N/A
Philips Advance	ICN2P16TLEDN	IS	2	C	C	C	C
Philips Advance	ICN2P16HLTLEDSC	IS	2	C	C	C	C
Philips Advance	ICN4P16HLTLEDSC	IS	4	C	C	C	C
Philips Advance	IZT-2P16-TLED-SC	IS	2	C	C	C	C
Philips Advance	IZT-4P16-TLED-SC	IS	4	C	C	C	C
Philips Advance	ICN2P16TLEDELN	IS	2	C	C	C	C
Philips Advance	IOP-2PSP32-LW-N	PS	2	C	C	C	C
Philips Advance	IZT-2PSP32-SC	PS	2	C	C	C	C
Philips Advance	IOP-4PSP32-LW-SC	PS	4	C	C	C	C
Philips Advance	IOP-1PSP32-N	PS	1	C	C	N/A	N/A
Philips Advance	IOP-2PSP32-N	PS	2	C	C	C	C
Philips Advance	REZ-3S32-SC	PS	3	C	N/A	C	N/A
Philips Advance	IOP-3S32-SC	PS	2	C	C	C	C
Philips Advance	IOP-1S32-LW-SC	PS	1	C	C	N/A	N/A
Philips Advance	IOP-2S32-LW-SC	PS	2	C	C	C	C

KEY: C = Compatible N/A = Not applicable N = Not Compatible

T8 Hybrid Field-Adjustable

Dimmer Compatibility List



Visit www.rablighting.com for periodic updates to this list or contact us at 888-722-1000 for questions or comments.

Wiring Method	Dimming Method	Dimmers		Qty. of Lamps			
		Dimmer Brand	Dimmer Model	1	4	8	10
Type B - Ballast Bypass	Triac Dimming @120V with compatible Triac dimmer	LUTRON	NTELV-300	Yes	Yes	Yes	Yes
		LUTRON	SELV-300P	Yes	Yes	Yes	Yes
		LUTRON	CTELV-303P	Yes	Yes	Yes	Yes
		LUTRON	DVELV-303P	Yes	Yes	Yes	Yes
Type A - Ballast Compatible	0-10V @120V&277V with compatible dimming fluorescent ballast & compatible 0-10V dimmer	1. Ballast: IZT-4P16-TLED-SC/QHE 2x32T8 UNV DIM-TC Dimmer: (Lutron: DVSTV-WH)					
		2. Sylvania Elogic 45167 :ELMC-SL3W-TVWBX/UNV Dimmer: (Lutron: DVSTV-WH)					