

PUCK Slim Surface-Mount Downlight

RAB



CCT Field-Adjustable, Surface-Mount Downlight, 90CRI



90 CRI



FIELD
ADJUSTABLE



50,000
HOURS



120V



WET
RATED



FCC
LISTED

PROJECT: _____

DATE: _____

TYPE: _____

PREPARED BY: _____



KEY FEATURES

- Easy surface-mount installation directly to j-box or recessed housing
- Slim profile design
- Magnetic trim with optional colors
- Smooth, diffused, uniform light distribution
- Triac/ELV dimmable
- Suitable for dry, damp and wet locations
- 5 Year, No-Compromise Warranty

TECHNICAL SPECIFICATIONS

CONSTRUCTION

Housing Material

Metal

Housing Finish

Black, Bronze, Brushed Nickel and White

Shape

Round

Trim Style

Smooth

Controls

Dipswitch mounted on driver box for 5 CCT selection

Mounting

Recessed/Surface

Beam Angle

110°±10

Base Type

E26

ELECTRICAL

THD

≤20%

Power Factor

≥0.9

Input Voltage

120V

Operating Frequency

60Hz

Operating Temperature

-4°F to 104°F (-20°C to 40°C)

Dimming

TRIAC dimming compatibility

Note

All values are typical (tolerance +/- 10%)

COMPLIANCE

Safety Listing

UL Listed

Environment/Fixture Rating

Wet Location. Can be used in wet and damp location.

T24 JA8 Compliant

Yes

Energy Star Compliant

Yes

Air Tight

No

FCC

Complies with Part 15 of the FCC Rules

RoHS

Mercury and UV free. RoHS-compliant components.

OTHER

Warranty

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish.

RAB warranty is subject to all terms and conditions found at: rablighting.com

PERFORMANCE

Lifespan

50,000-hour LED lifespan based on IES LM-80 results and TM-21 calculations


PUCK Slim Surface-Mount Downlight




PERFORMANCE

PUCK slim surface-mount downlight 7.5W	
INPUT WATTS	7.5W
LUMENS	650
LM/W	87
CRI	90
CCT	2700/3000/3500/4000/5000K
INPUT VOLTAGE	120V


ACCESSORY (SOLD SEPARATELY)



PUCKFA-TRIM-4R-BNS
(4" ROUND BRUSHED NICKEL TRIM)




PUCKFA-TRIM-4R-BRS
(4" ROUND BRONZE TRIM)




PUCKFA-TRIM-4R-BS
(4" ROUND BLACK TRIM)

DIMENSIONS

PUCK slim surface-mount downlight

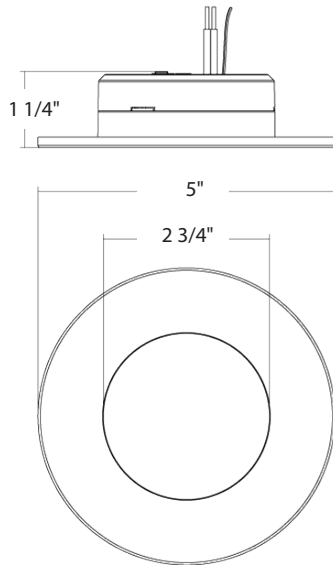

4" Round Trim

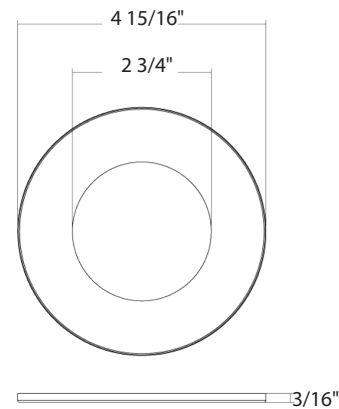

ORDERING MATRIX

PUCK slim surface-mount downlight

Family	Fixture Type	Size-Shape	Wattage	CRI	Color Temperature	Voltage Rating	Fixture Finish	Trim Finish
PUCK	FA	4R	7.5	9	CCT	120	W	S
FA	Field-Adjustable	4R 4" Round	7.5 7.5W	9 90 CRI	CCT Adjustable 27/30/35/40/50K	120 120V	W White	S Smooth