



# SLIM Field-Adjustable, Wall Pack w/Adjustable Throw **RAB**


SLIMXS / SLIMXXS

SLIMS



SLIMM

SLIML



Field-Adjustable Wall Pack, with Adjustable Forward Throw



PROJECT:

DATE:

TYPE:

PREPARED BY:



\* 3000K models only

## KEY FEATURES

- Available with adjustable wattages:  
XXS: 7/5/3.5W  
XS: 25/18/12W  
S: 38/28/18W  
M: 55/41/27W  
L: 60/45/29W
- Field-adjustable CCT: **3000/4000/5000K** - Factory default **4000K**  
Static CCT models available: 3000K
- Adjustable **forward throw**: -20°/-10°/0°/10°/20° - factory default 0°
- Integrated **on/off** photocell
- 0-10V** dimming
- UL rated for **wet** locations
- IP65** rated
- 5-year, no-compromise warranty**

## PERFORMANCE

SLIMXXS	3000K					3000K					3000K				
Optics	-20°	-10°	0°	10°	20°	-20°	-10°	0°	10°	20°	-20°	-10°	0°	10°	20°
Wattage	7W					5W					3.5W				
Input Watts	6.7W	6.7W	6.7W	6.7W	6.7W	5W	5W	5W	5W	5W	3.6W	3.6W	3.6W	3.6W	3.6W
Lumens	819	824	810	783	754	553	556	546	529	511	329	329	324	309	301
Efficacy	122.2	123.0	120.9	116.9	112.5	110.6	111.2	109.2	105.8	102.2	91.4	91.4	90.0	85.8	83.6
CRI	81	81	81	80	80	81	81	81	80	80	81	81	81	81	80
Voltage Ratings	120-277V														

SLIMXXS	4000K					4000K					4000K				
Optics	-20°	-10°	0°	10°	20°	-20°	-10°	0°	10°	20°	-20°	-10°	0°	10°	20°
Wattage	7W					5W					3.5W				
Input Watts	6.6W	6.6W	6.6W	6.6W	6.6W	4.9W	4.9W	4.9W	4.9W	4.9W	3.5W	3.5W	3.5W	3.5W	3.5W
Lumens	832	837	823	795	767	562	565	555	537	520	334	334	329	314	306
Efficacy	126.1	126.8	124.7	120.5	116.2	114.7	115.3	113.3	109.6	106.1	95.4	95.4	94.0	89.7	87.4
CRI	83	83	83	83	83	83	83	83	83	83	83	83	83	83	83
Voltage Ratings	120-277V														

# SLIM Field-Adjustable, Wall Pack w/Adjustable Throw **RAB**

## PERFORMANCE

SLIMXXS	5000K					5000K					5000K				
Optics	-20°	-10°	0°	10°	20°	-20°	-10°	0°	10°	20°	-20°	-10°	0°	10°	20°
Wattage	7W					5W					3.5W				
Input Watts	6.7W	6.7W	6.7W	6.7W	6.7W	5W	5W	5W	5W	5W	3.6W	3.6W	3.6W	3.6W	3.6W
Lumens	867	873	858	829	800	585	589	578	560	542	348	349	343	327	319
Efficacy	129.4	130.3	128.1	123.7	119.4	117.0	117.8	115.6	112.0	108.4	96.7	96.9	95.3	90.8	88.6
CRI	82	82	82	82	81	82	82	82	82	81	82	82	82	82	81
Voltage Ratings	120-277V														

SLIMXS	3000K					3000K					3000K				
Optics	-20°	-10°	0°	10°	20°	-20°	-10°	0°	10°	20°	-20°	-10°	0°	10°	20°
Wattage	25W					18W					12W				
Input Watts	25.3W	25.3W	25.3W	25.3W	25.3W	18W	18W	18W	18W	18W	11.9W	11.9W	11.9W	11.9W	11.9W
Lumens	3,222	3,247	3,194	3,084	2,979	2,332	2,345	2,305	2,227	2,148	1,503	1,513	1,487	1,436	1,382
Efficacy	127.4	128.3	126.2	121.9	117.7	129.6	130.3	128.1	123.7	119.3	126.3	127.1	125.0	120.7	116.1
CRI	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80
Voltage Ratings	120-277V														

SLIMXS	4000K					4000K					4000K				
Optics	-20°	-10°	0°	10°	20°	-20°	-10°	0°	10°	20°	-20°	-10°	0°	10°	20°
Wattage	25W					18W					12W				
Input Watts	24.4W	24.4W	24.4W	24.4W	24.4W	17.4W	17.4W	17.4W	17.4W	17.4W	11.5W	11.5W	11.5W	11.5W	11.5W
Lumens	3,416	3,444	3,385	3,267	3,166	2,472	2,487	2,443	2,359	2,283	1,593	1,605	1,576	1,521	1,469
Efficacy	140.0	141.1	138.7	133.9	129.8	142.1	142.9	140.4	135.6	131.2	138.5	139.6	137.0	132.3	127.7
CRI	83	83	83	83	83	83	83	83	83	83	83	83	83	83	83
Voltage Ratings	120-277V														

SLIMXS	5000K					5000K					5000K				
Optics	-20°	-10°	0°	10°	20°	-20°	-10°	0°	10°	20°	-20°	-10°	0°	10°	20°
Wattage	25W					18W					12W				
Input Watts	25.3W	25.3W	25.3W	25.3W	25.3W	18W	18W	18W	18W	18W	11.9W	11.9W	11.9W	11.9W	11.9W
Lumens	3,408	3,435	3,375	3,256	3,155	2,466	2,481	2,436	2,351	2,275	1,589	1,601	1,571	1,516	1,464
Efficacy	134.7	135.8	133.4	128.7	124.7	137.0	137.8	135.3	130.6	126.4	133.5	134.5	132.0	127.4	123.0
CRI	82	82	82	82	82	82	82	82	82	82	82	82	82	82	82
Voltage Ratings	120-277V														

SLIMS	3000K					3000K					3000K				
Optics	-20°	-10°	0°	10°	20°	-20°	-10°	0°	10°	20°	-20°	-10°	0°	10°	20°
Wattage	38W					28W					18W				
Input Watts	37.5W	37.5W	37.5W	37.5W	37.5W	28.1W	28.1W	28.1W	28.1W	28.1W	18.4W	18.4W	18.4W	18.4W	18.4W
Lumens	4,800	4,837	4,732	4,627	4,470	3,787	3,827	3,737	3,660	3,514	2,564	2,580	2,526	2,471	2,375
Efficacy	128.0	129.0	126.2	123.4	119.2	134.8	136.2	133.0	130.2	125.1	139.3	140.2	137.3	134.3	129.1
CRI	82	82	82	82	82	82	82	82	82	82	81	81	81	81	81
Voltage Ratings	120-277V														

# SLIM Field-Adjustable, Wall Pack w/Adjustable Throw **RAB**

## PERFORMANCE

SLIMS	4000K					4000K					4000K				
Optics	-20°	-10°	0°	10°	20°	-20°	-10°	0°	10°	20°	-20°	-10°	0°	10°	20°
Wattage	38W					28W					18W				
Input Watts	36W	36W	36W	36W	36W	27W	27W	27W	27W	27W	17.7W	17.7W	17.7W	17.7W	17.7W
Lumens	5,206	5,247	5,131	5,012	4,833	4,107	4,151	4,052	3,965	3,799	2,781	2,799	2,739	2,677	2,568
Efficacy	144.6	145.8	142.5	139.2	134.3	152.1	153.7	150.1	146.9	140.7	157.1	158.1	154.7	151.2	145.1
CRI	83	83	83	83	83	83	83	83	83	83	83	83	83	83	83
Voltage Ratings	120-277V														

SLIMS	5000K					5000K					5000K				
Optics	-20°	-10°	0°	10°	20°	-20°	-10°	0°	10°	20°	-20°	-10°	0°	10°	20°
Wattage	38W					28W					18W				
Input Watts	37.5W	37.5W	37.5W	37.5W	37.5W	28.1W	28.1W	28.1W	28.1W	28.1W	18.4W	18.4W	18.4W	18.4W	18.4W
Lumens	5,071	5,111	4,997	4,875	4,707	4,001	4,044	3,946	3,856	3,700	2,709	2,726	2,667	2,603	2,501
Efficacy	135.2	136.3	133.3	130.0	125.5	142.4	143.9	140.4	137.2	131.7	147.2	148.2	144.9	141.5	135.9
CRI	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80
Voltage Ratings	120-277V														

SLIMM	3000K					3000K					3000K				
Optics	-20°	-10°	0°	10°	20°	-20°	-10°	0°	10°	20°	-20°	-10°	0°	10°	20°
Wattage	55W					41W					27W				
Input Watts	55W	55W	55W	55W	55W	41.3W	41.3W	41.3W	41.3W	41.3W	27.2W	27.2W	27.2W	27.2W	27.2W
Lumens	7,206	7,326	7,233	7,037	6,801	5,699	5,802	5,713	5,596	5,354	3,933	3,988	3,947	3,859	3,706
Efficacy	131.0	133.2	131.5	127.9	123.7	138.0	140.5	138.3	135.5	129.6	144.6	146.6	145.1	141.9	136.3
CRI	82	82	82	82	82	82	82	82	82	81	82	82	82	82	82
Voltage Ratings	120-277V														

SLIMM	4000K					4000K					4000K				
Optics	-20°	-10°	0°	10°	20°	-20°	-10°	0°	10°	20°	-20°	-10°	0°	10°	20°
Wattage	55W					41W					27W				
Input Watts	52.8W	52.8W	52.8W	52.8W	52.8W	39.6W	39.6W	39.6W	39.6W	39.6W	26.1W	26.1W	26W	26W	26W
Lumens	7,697	7,816	7,729	7,530	7,256	6,087	6,190	6,105	5,988	5,712	4,201	4,255	4,218	4,129	3,954
Efficacy	145.8	148.0	146.4	142.6	137.4	153.7	156.3	154.2	151.2	144.2	161.0	163.0	162.2	158.8	152.1
CRI	83	83	83	83	83	83	83	83	83	83	83	83	83	83	83
Voltage Ratings	120-277V														

SLIMM	5000K					5000K					5000K				
Optics	-20°	-10°	0°	10°	20°	-20°	-10°	0°	10°	20°	-20°	-10°	0°	10°	20°
Wattage	55W					41W					27W				
Input Watts	54.9W	54.9W	54.9W	54.9W	54.9W	41.2W	41.2W	41.2W	41.2W	41.2W	27.5W	27.5W	27.4W	27.4W	27.4W
Lumens	7,532	7,663	7,571	7,374	7,108	5,957	6,069	5,980	5,864	5,596	4,111	4,171	4,131	4,044	3,873
Efficacy	137.2	139.6	137.9	134.3	129.5	144.6	147.3	145.1	142.3	135.8	149.5	151.7	150.8	147.6	141.4
CRI	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80
Voltage Ratings	120-277V														

# SLIM Field-Adjustable, Wall Pack w/Adjustable Throw **RAB**

## PERFORMANCE

SLIML	3000K					3000K					3000K				
Optics	-20°	-10°	0°	10°	20°	-20°	-10°	0°	10°	20°	-20°	-10°	0°	10°	20°
Wattage	60W					45W					29W				
Input Watts	59.5W	59.5W	59.5W	59.5W	59.5W	44.6W	44.6W	44.6W	44.6W	44.6W	29W	29W	29W	29W	29W
Lumens	8,025	8,087	7,929	7,646	7,310	6,358	6,428	6,264	6,093	5,796	4,369	4,395	4,309	4,171	3,966
Efficacy	134.9	135.9	133.3	128.5	122.9	142.6	144.1	140.4	136.6	130.0	150.7	151.6	148.6	143.8	136.8
CRI	82	82	82	82	82	82	81	82	82	82	81	82	82	82	82
Voltage Ratings	120-277V														

SLIML	4000K					4000K					4000K				
Optics	-20°	-10°	0°	10°	20°	-20°	-10°	0°	10°	20°	-20°	-10°	0°	10°	20°
Wattage	60W					45W					29W				
Input Watts	57.2W	57.2W	57.2W	57.2W	57.2W	42.9W	42.9W	42.9W	42.9W	42.9W	27.9W	27.9W	27.9W	27.9W	27.9W
Lumens	8,651	8,697	8,527	8,238	7,864	5,898	5,977	5,825	5,655	5,388	4,053	4,087	4,007	3,873	3,687
Efficacy	151.2	152.0	149.1	144.0	137.5	137.5	139.3	135.8	131.8	125.6	145.3	146.5	143.6	138.7	132.2
CRI	83	83	83	83	83	83	83	83	83	83	83	83	83	83	83
Voltage Ratings	120-277V														

SLIML	5000K					5000K					5000K				
Optics	-20°	-10°	0°	10°	20°	-20°	-10°	0°	10°	20°	-20°	-10°	0°	10°	20°
Wattage	60W					45W					29W				
Input Watts	59.4W	59.4W	59.4W	59.4W	59.4W	44.5W	44.5W	44.5W	44.5W	44.5W	29W	29W	29W	29W	29W
Lumens	8,500	8,557	8,376	8,088	7,727	6,734	6,802	6,617	6,445	6,127	4,628	4,650	4,552	4,412	4,192
Efficacy	143.1	144.1	141.0	136.2	130.1	151.3	152.9	148.7	144.8	137.7	159.6	160.3	157.0	152.1	144.6
CRI	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80
Voltage Ratings	120-277V														

## TECHNICAL SPECIFICATIONS

### COMPLIANCE

#### UL Listed

This product is UL listed for wet locations

#### DLC Listed

This product family is listed with the DesignLights Consortium (DLC). Individual SKUs within this family may carry either a DLC Standard or DLC Premium qualification. Please refer to the individual product specification sheet or the DLC Qualified Products List (QPL) at [designlights.org](http://designlights.org) to confirm the qualification status of a specific SKU prior to specification or purchase.

#### LUNA

This product has received DLC's LUNA Qualification for 3000K models.

#### Dark Sky Approved

Conforms to the requirements listed by the International Dark-Sky Association for "Dark Sky" approval. The Fixture Seal of Approval provides objective, third-party certification for luminaires that minimize glare, reduce light trespass, and don't pollute the night sky.

### FIELD ADJUSTABLE

Adjustable Wattage for models with adjustable CCT:

XXS: 7/5/3.5W - Factory default 5W

XS: 25/18/12W - Factory default 18W

S: 38/28/18W - Factory default 28W

M: 55/41/27W - Factory default 41W

L: 60/45/29W - Factory default 45W

Adjustable Wattage for models with Static 3000K CCT:

XXS: 7/5/3.5W - Factory default 3.5W

XS: 25/18/12W - Factory default 12W

S: 38/28/18W - Factory default 18W

M: 55/41/27W - Factory default 27W

L: 60/45/29W - Factory default 29W

Adjustable color temperature: 3000/4000/5000K - Factory default 4000K

Static color temperature: 3000K

Adjustable forward throw angle: -20°/-10°/0°/10°/20° - factory default 0°

# SLIM Field-Adjustable, Wall Pack w/Adjustable Throw **RAB**

## TECHNICAL SPECIFICATIONS

### CONSTRUCTION

#### IP Rating

Ingress protection rating of IP65 for dust and water

#### Cold Weather Starting

Minimum starting temperature is -40°C (-40°F)

#### Maximum Ambient Temperature

Suitable for use in up to 40°C (40°F)

#### Housing

Die-cast aluminum

#### Mounting

Heavy-duty mounting bracket with spring-hinged housing and "kick stand" allow for easy installations. Conduit entries on back and both sides.

#### Lens

Tempered glass

#### Gasket

Silicone

#### Photocell

Integrated photocell included with on/off switch

#### Green Technology

Mercury and UV free. RoHS-compliant components.

#### Finish

Bronze & White: Formulated for high durability and long-lasting color  
Brass: Brushed and electroplated finish that will naturally patina over time

### ELECTRICAL

#### Drivers:

##### Constant Current, 120-277V, 50/60 Hz

SLIMXXS (7W) : 120V: 0.047A, 208V: 0.037A, 240V: 0.032A, 277V: 0.028A  
SLIMXXS (5W) : 120V: 0.034A, 208V: 0.029A, 240V: 0.025A, 277V: 0.022A  
SLIMXXS (3.5W) : 120V: 0.023A, 208V: 0.024A, 240V: 0.021A, 277V: 0.018A

SLIMXS (25W) : 120V: 0.20A, 208V: 0.13A, 240V: 0.11A, 277V: 0.10A  
SLIMXS (18W) : 120V: 0.14A, 208V: 0.10A, 240V: 0.09A, 277V: 0.08A  
SLIMXS (12W) : 120V: 0.09A, 208V: 0.08A, 240V: 0.07A, 277V: 0.06A

SLIMS (38W) : 120V: 0.31A, 208V: 0.19A, 240V: 0.16A, 277V: 0.14A  
SLIMS (28W) : 120V: 0.23A, 208V: 0.15A, 240V: 0.13A, 277V: 0.11A  
SLIMS (18W) : 120V: 0.15A, 208V: 0.10A, 240V: 0.09A, 277V: 0.08A

SLIMM (55W) : 120V: 0.46A, 208V: 0.28A, 240V: 0.24A, 277V: 0.21A  
SLIMM (41W) : 120V: 0.35A, 208V: 0.21A, 240V: 0.19A, 277V: 0.16A  
SLIMM (27W) : 120V: 0.23A, 208V: 0.15A, 240V: 0.13A, 277V: 0.12A

SLIML(60W) : 120V: 0.50A, 208V: 0.30A, 240V: 0.26A, 277V: 0.22A  
SLIML(45W) : 120V: 0.37A, 208V: 0.23A, 240V: 0.20A, 277V: 0.17A  
SLIML(29W) : 120V: 0.24A, 208V: 0.16A, 240V: 0.14A, 277V: 0.12A

#### Dimming Driver:

Driver includes dimming control wiring for 0-10V dimming systems.  
Requires separate 0-10V DC dimming circuit. Dims down to 10% and off.

### ELECTRICAL

#### THD/Power factor at default values:

Model#	THD	Power Factor	THD	Power Factor
	@120V		@277V	
SLIMXXS	24.0%	82.0%	16.8%	98.0%
SLIMXS	12.4%	85.1%	15.1%	98.6%
SLIMS	9.1%	91.7%	3.1%	99.6%
SLIMM	7.2%	92.1%	2.5%	99.6%
SLIML	7.0%	92.8%	3.3%	99.6%

#### Surge Protection

2kV, 4kV

### LED CHARACTERISTICS

#### LEDs

Long-life, high-efficacy, surface-mount LEDs

### OTHER

#### Warranty

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).

#### Lifespan

100,000-hour LED lifespan based on IES LM-80 results and TM-21 calculations

# SLIM Field-Adjustable, Wall Pack w/Adjustable Throw **RAB**

## WIRELESS NETWORK LIGHTING CONTROLS

Lightcloud products offer integrated network lighting control for a truly wireless solution that allows you to manage RAB's various compatible devices. With RAB's patented Rapid Provisioning technology, devices can be quickly and easily commissioned for residential and commercial applications. Each device can communicate with other devices in the mesh network. With two Lightcloud systems to choose from, it's easy to implement controls anywhere.




Learn more about Lightcloud wireless networked lighting controls.

Design Lights Consortium Network Lighting Controls:

- Interior Applications: N1XMLOEATB
- Exterior Applications: NHCZ2BIA17L

## Lightcloud®

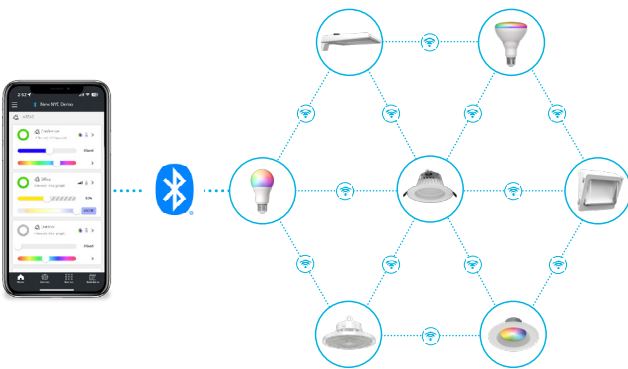

- Utilizes Bluetooth Mesh, eliminating the need for a Gateway or Hub
- Ideal for applications that need basic wireless control such as ON/OFF, dimming, color tuning, Schedules, and SmartShift
- Download the Lightcloud Blue mobile app for iOS or Android devices
- Add the XDIM/BRIDGE/LCB and LCGATEWAY to adopt premium Lightcloud Enterprise features

### SIMPLE SETUP



Learn more about [Lightcloud Blue](#). Visit the [Lightcloud Blue Resources](#) page for more information on how to use the system.

## Lightcloud®



- Utilizes a secure cellular and Zigbee mesh network that requires a Gateway or Hub (sold separately)
- Offers premium features like remote commissioning, demand response, BACnet integration, and more
- Download the Lightcloud Enterprise mobile app for iOS or Android devices

### SIMPLE SETUP




Learn more about [Lightcloud Enterprise](#). Visit the [Lightcloud Enterprise Resources](#) page for more information on how to use the system.

# SLIM Field-Adjustable, Wall Pack w/Adjustable Throw **RAB**

## DIMENSIONS


### SLIMXXS / SLIMXS

Weight: 4.3 lbs

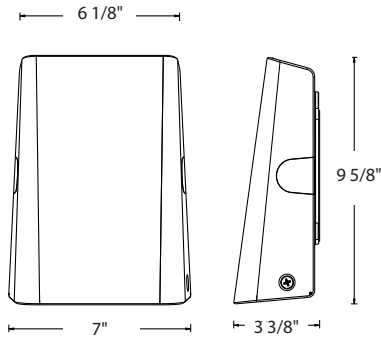


### SLIMS

Weight: 6.0 lbs

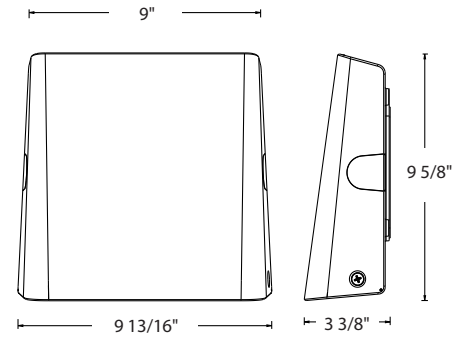


### SLIMM

Weight: 8.2 lbs

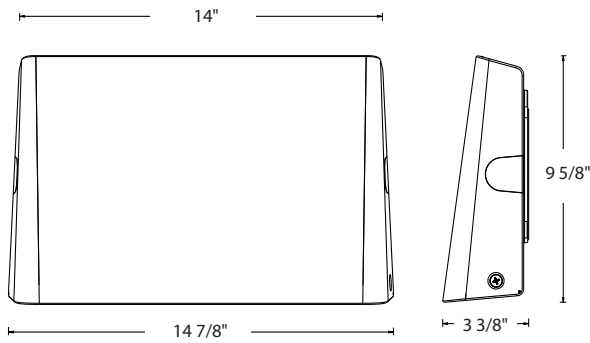

### SLIML

Weight: 9.9 lbs

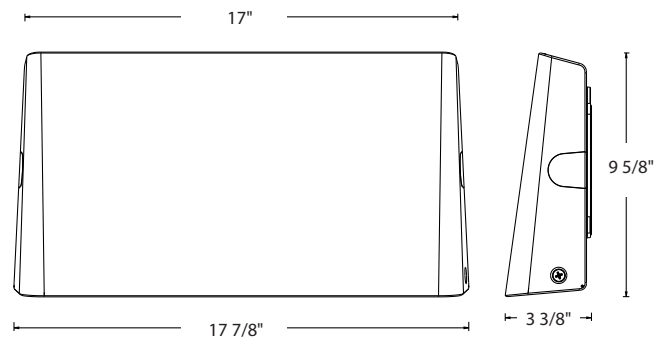

## ORDERING MATRIX

### SLIM High Output, Field-Adjustable

Family	Adjustable Wattage	Color Temperature	Finish	Driver	Controls
<b>SLIM</b>					
<b>XXS</b>	7/5/3.5W	<b>BLANK</b>			
<b>XS</b>	25/18/12W	<b>Y</b>	<b>BLANK</b>	120V-277V,	<b>BLANK</b>
<b>S</b>	38/28/18W	3000/4000/5000K Adjustable	<b>W</b>	0-10V Dimming	<b>/LC</b>
<b>M</b>	55/41/27W	3000K Static	Bronze		<b>/LCB</b>
<b>L</b>	60/45/29W		White		No Option
					Lightcloud
					Lightcloud Blue