

SLIM22 Adjustable Throw Wall Pack



SLIM22-S



SLIM22-M



SLIM22-L

PROJECT:

DATE:

TYPE:

PREPARED BY:



KEY FEATURES

- Available models and selectable wattages:
SLIM22-S-30 : 30/25/20/15W (Default 30W)
SLIM22-S-60 : 60/50/40/30W (Default 60W)
SLIM22-M-100 : 100/85/70/50W (Default 100W)
SLIM22-L-150 : 150/125/100/75W (Default 150W)
- Adjustable CCT: 3000/4000/5000K (Default 4000K)
- On/Off Photocell
- Selectable forward throw: 45°/30°/15°/0° (Default 0°)
- Battery backup option available
- IP65 rated
- 5-year limited warranty

Full cutoff wall pack with adjustable forward throw



FIELD
ADJUSTABLE



ADJUSTABLE
THROW

IP65

IP RATING



100,000
HRS



WET
RATED

PERFORMANCE

SLIM22-S-30

SLIM22-S-30 @30W	3000K				4000K				5000K			
FORWARD THROW	45°	30°	15°	0°	45°	30°	15°	0°	45°	30°	15°	0°
INPUT WATTS	32.7W	32.7W	32.7W	32.7W	31.6W	31.6W	31.6W	31.6W	32.8W	32.8W	32.8W	32.8W
LUMENS	4,457	4,454	4,446	4,445	4,833	4,831	4,824	4,821	4,830	4,831	4,822	4,819
EFFICACY	136.3	136.2	136.0	135.9	152.9	152.9	152.7	152.6	147.3	147.3	147.0	146.9
CRI	83	83	83	83	86	86	86	86	84	84	84	84
VOLTAGE RATINGS	120-277V											

SLIM22-S-30 @25W	3000K				4000K				5000K			
FORWARD THROW	45°	30°	15°	0°	45°	30°	15°	0°	45°	30°	15°	0°
INPUT WATTS	27.2W	27.2W	27.2W	27.2W	26.3W	26.3W	26.3W	26.3W	27.3W	27.3W	27.3W	27.3W
LUMENS	3,797	3,793	3,799	3,790	4,117	4,114	4,122	4,111	4,115	4,114	4,120	4,109
EFFICACY	139.6	139.4	139.7	139.3	156.5	156.4	156.7	156.3	150.7	150.7	150.9	150.5
CRI	83	83	83	83	86	86	86	86	84	84	84	84
VOLTAGE RATINGS	120-277V											

SLIM22 Adjustable Throw Wall Pack



PERFORMANCE

SLIM22-S-30 @20W	3000K				4000K				5000K			
FORWARD THROW	45°	30°	15°	0°	45°	30°	15°	0°	45°	30°	15°	0°
INPUT WATTS	21.4W	21.4W	21.4W	21.4W	20.7W	20.7W	20.7W	20.7W	21.5W	21.5W	21.5W	21.5W
LUMENS	3,025	3,021	3,022	3,024	3,280	3,277	3,279	3,280	3,278	3,277	3,278	3,278
EFFICACY	141.4	141.2	141.2	141.3	158.5	158.3	158.4	158.5	152.5	152.4	152.5	152.5
CRI	84	84	84	84	86	86	86	86	84	84	84	84
VOLTAGE RATINGS	120-277V											

SLIM22-S-30 @15W	3000K				4000K				5000K			
FORWARD THROW	45°	30°	15°	0°	45°	30°	15°	0°	45°	30°	15°	0°
INPUT WATTS	16.0W	16.0W	16.0W	16.0W	15.5W	15.5W	15.5W	15.5W	16.0W	16.0W	16.0W	16.0W
LUMENS	2,206	2,204	2,201	2,199	2,392	2,391	2,388	2,385	2,391	2,391	2,387	2,384
EFFICACY	137.9	137.8	137.6	137.4	154.3	154.3	154.1	153.9	149.4	149.4	149.2	149.0
CRI	84	84	84	84	86	86	86	86	84	84	84	84
VOLTAGE RATINGS	120-277V											

SLIM22-S-30

SLIM22-S-30 @30W	3000K				4000K				5000K			
FORWARD THROW	45°	30°	15°	0°	45°	30°	15°	0°	45°	30°	15°	0°
INPUT WATTS	31.1W	31.1W	31.1W	31.1W	30.2W	30.2W	30.2W	30.2W	31.3W	31.3W	31.3W	31.3W
LUMENS	4,240	4,235	4,226	4,224	4,544	4,536	4,522	4,521	4,524	4,518	4,508	4,507
EFFICACY	136.3	136.2	135.9	135.8	150.5	150.2	149.7	149.7	144.5	144.3	144.0	144.0
CRI	83	83	83	83	86	86	86	86	84	84	84	84
VOLTAGE RATINGS	480V											

SLIM22-S-30 @25W	3000K				4000K				5000K			
FORWARD THROW	45°	30°	15°	0°	45°	30°	15°	0°	45°	30°	15°	0°
INPUT WATTS	25W	25W	25W	25W	24.3W	24.3W	24.3W	24.3W	25.2W	25.2W	25.2W	25.2W
LUMENS	3,422	3,418	3,418	3,413	3,667	3,661	3,657	3,653	3,651	3,646	3,646	3,642
EFFICACY	136.9	136.7	136.7	136.5	150.9	150.7	150.5	150.3	144.9	144.7	144.7	144.5
CRI	83	83	83	83	86	86	86	86	84	84	84	84
VOLTAGE RATINGS	480V											

SLIM22-S-30 @20W	3000K				4000K				5000K			
FORWARD THROW	45°	30°	15°	0°	45°	30°	15°	0°	45°	30°	15°	0°
INPUT WATTS	20.5W	20.5W	20.5W	20.5W	19.9W	19.9W	19.9W	19.9W	20.6W	20.6W	20.6W	20.6W
LUMENS	2,801	2,800	2,801	2,796	3,002	2,999	2,997	2,993	2,989	2,987	2,988	2,983
EFFICACY	136.6	136.6	136.6	136.4	150.9	150.7	150.6	150.4	145.1	145.0	145.0	144.8
CRI	84	84	84	84	86	86	86	86	84	84	84	84
VOLTAGE RATINGS	480V											

SLIM22 Adjustable Throw Wall Pack



PERFORMANCE

SLIM22-S-30 @15W	3000K				4000K				5000K			
FORWARD THROW	45°	30°	15°	0°	45°	30°	15°	0°	45°	30°	15°	0°
INPUT WATTS	14.7W	14.7W	14.7W	14.7W	14.3W	14.3W	14.3W	14.3W	14.8W	14.8W	14.8W	14.8W
LUMENS	1,971	1,967	1,965	1,964	2,112	2,107	2,103	2,102	2,103	2,098	2,096	2,096
EFFICACY	134.1	133.8	133.7	133.6	147.7	147.3	147.1	147.0	142.1	141.8	141.6	141.6
CRI	84	84	84	84	86	86	86	86	84	84	84	84
VOLTAGE RATINGS	480V											

SLIM22-S-60

SLIM22-S-60 @60W	3000K				4000K				5000K			
FORWARD THROW	45°	30°	15°	0°	45°	30°	15°	0°	45°	30°	15°	0°
INPUT WATTS	61.8W	61.8W	61.8W	61.8W	59.3W	59.3W	59.3W	59.3W	61.8W	61.8W	61.8W	61.8W
LUMENS	8,662	8,642	8,617	8,606	9,383	9,348	9,324	9,322	9,179	9,169	9,324	9,322
EFFICACY	140.2	139.8	139.4	139.3	158.2	157.6	157.2	157.2	148.5	148.4	157.2	157.2
CRI	82	82	82	82	84	84	84	84	82	82	82	82
VOLTAGE RATINGS	120-277V											

SLIM22-S-60 @50W	3000K				4000K				5000K			
FORWARD THROW	45°	30°	15°	0°	45°	30°	15°	0°	45°	30°	15°	0°
INPUT WATTS	52W	52W	52W	52W	50.1W	50.1W	50.1W	50.1W	52W	52W	52W	52W
LUMENS	7,544	7,526	7,544	7,495	8,080	8,049	8,080	8,027	7,846	7,837	7,846	7,968
EFFICACY	145.1	144.7	145.1	144.1	161.3	160.7	161.3	160.2	150.9	150.7	150.9	153.2
CRI	82	82	82	82	84	84	84	84	82	82	82	82
VOLTAGE RATINGS	120-277V											

SLIM22-S-60 @40W	3000K				4000K				5000K			
FORWARD THROW	45°	30°	15°	0°	45°	30°	15°	0°	45°	30°	15°	0°
INPUT WATTS	42.8W	42.8W	42.8W	42.8W	41.5W	41.5W	41.5W	41.5W	42.8W	42.8W	42.8W	42.8W
LUMENS	6,416	6,402	6,383	6,375	6,803	6,778	6,760	6,759	6,643	6,635	6,747	6,746
EFFICACY	149.9	149.6	149.1	148.9	163.9	163.3	162.9	162.9	155.2	155.0	157.6	157.6
CRI	82	82	82	82	84	84	84	84	82	82	82	82
VOLTAGE RATINGS	120-277V											

SLIM22-S-60 @30W	3000K				4000K				5000K			
FORWARD THROW	45°	30°	15°	0°	45°	30°	15°	0°	45°	30°	15°	0°
INPUT WATTS	30.6W	30.6W	30.6W	30.6W	29.9W	29.9W	29.9W	29.9W	30.6W	30.6W	30.6W	30.6W
LUMENS	4,727	4,716	4,702	4,696	4,943	4,925	4,912	4,911	4,904	4,898	4,981	4,980
EFFICACY	154.5	154.1	153.7	153.5	165.3	164.7	164.3	164.3	160.3	160.1	162.8	162.7
CRI	82	82	82	82	84	84	84	84	82	82	82	82
VOLTAGE RATINGS	120-277V											

SLIM22 Adjustable Throw Wall Pack



PERFORMANCE

SLIM22-S-60

SLIM22-S-60 @60W	3000K				4000K				5000K			
FORWARD THROW	45°	30°	15°	0°	45°	30°	15°	0°	45°	30°	15°	0°
INPUT WATTS	60.9W	60.9W	60.9W	60.9W	58.3W	58.3W	58.3W	58.3W	60.7W	60.7W	60.7W	60.7W
LUMENS	8,269	8,246	8,228	8,215	8,904	8,893	8,876	8,862	8,545	8,530	8,484	8,480
EFFICACY	135.8	135.4	135.1	134.9	152.7	152.5	152.2	152.0	140.8	140.5	139.8	139.7
CRI	81	81	81	81	85	85	85	85	85	85	85	85
VOLTAGE RATINGS	480V											

SLIM22-S-60 @50W	3000K				4000K				5000K			
FORWARD THROW	45°	30°	15°	0°	45°	30°	15°	0°	45°	30°	15°	0°
INPUT WATTS	50.9W	50.9W	50.9W	50.9W	49W	49W	49W	49W	50.7W	50.7W	50.7W	50.7W
LUMENS	7,129	7,109	7,129	7,082	7,591	7,581	7,591	7,555	7,380	7,367	7,380	7,324
EFFICACY	140.1	139.7	140.1	139.1	154.9	154.7	154.9	154.2	145.6	145.3	145.6	144.5
CRI	81	81	81	81	85	85	85	85	85	85	85	85
VOLTAGE RATINGS	480V											

SLIM22-S-60 @40W	3000K				4000K				5000K			
FORWARD THROW	45°	30°	15°	0°	45°	30°	15°	0°	45°	30°	15°	0°
INPUT WATTS	40.5W	40.5W	40.5W	40.5W	39.3W	39.3W	39.3W	39.3W	40.3W	40.3W	40.3W	40.3W
LUMENS	5,827	5,811	5,798	5,789	6,118	6,110	6,099	6,089	5,998	5,987	5,955	5,952
EFFICACY	143.9	143.5	143.2	142.9	155.7	155.5	155.2	154.9	148.8	148.6	147.8	147.7
CRI	82	82	82	82	85	85	85	85	85	85	85	85
VOLTAGE RATINGS	480V											

SLIM22-S-60 @30W	3000K				4000K				5000K			
FORWARD THROW	45°	30°	15°	0°	45°	30°	15°	0°	45°	30°	15°	0°
INPUT WATTS	29.8W	29.8W	29.8W	29.8W	29.2W	29.2W	29.2W	29.2W	29.7W	29.7W	29.7W	29.7W
LUMENS	4,301	4,289	4,280	4,273	4,471	4,466	4,457	4,450	4,408	4,400	4,376	4,374
EFFICACY	144.3	143.9	143.6	143.4	153.1	152.9	152.6	152.4	148.4	148.1	147.3	147.3
CRI	82	82	82	82	85	85	85	85	85	85	85	85
VOLTAGE RATINGS	480V											

SLIM22-M-100

SLIM22-M-100 @100W	3000K				4000K				5000K			
FORWARD THROW	45°	30°	15°	0°	45°	30°	15°	0°	45°	30°	15°	0°
INPUT WATTS	104.1W	104.1W	104W	104W	99.2W	99.2W	99.1W	99.1W	104.1W	104.1W	104W	104W
LUMENS	14,238	14,224	14,145	14,122	15,575	15,555	15,464	15,443	15,091	15,076	15,019	15,016
EFFICACY	136.8	136.6	136.0	135.8	157.0	156.8	156.0	155.8	145.0	144.8	144.4	144.4
CRI	82	82	82	82	84	84	84	84	83	83	83	83
VOLTAGE RATINGS	120-277V											

SLIM22 Adjustable Throw Wall Pack



PERFORMANCE

SLIM22-M-100 @85W	3000K				4000K				5000K			
FORWARD THROW	45°	30°	15°	0°	45°	30°	15°	0°	45°	30°	15°	0°
INPUT WATTS	86.7W	86.7W	86.7W	86.7W	83.2W	83.2W	83.2W	83.2W	86.8W	86.8W	86.8W	86.8W
LUMENS	12,418	12,406	12,418	12,317	13,429	13,412	13,429	13,315	13,193	13,179	13,193	13,127
EFFICACY	143.2	143.1	143.2	142.1	161.4	161.2	161.4	160.0	152.0	151.8	152.0	151.2
CRI	82	82	82	82	84	84	84	84	83	83	83	83
VOLTAGE RATINGS	120-277V											

SLIM22-M-100 @70W	3000K				4000K				5000K			
FORWARD THROW	45°	30°	15°	0°	45°	30°	15°	0°	45°	30°	15°	0°
INPUT WATTS	71W	71W	71W	71W	68.5W	68.5W	68.5W	68.5W	71W	71W	71W	71W
LUMENS	10,618	10,607	10,548	10,531	11,315	11,300	11,234	11,219	11,182	11,170	11,128	11,126
EFFICACY	149.5	149.4	148.6	148.3	165.2	165.0	164.0	163.8	157.5	157.3	156.7	156.7
CRI	82	82	82	82	84	84	84	84	83	83	83	83
VOLTAGE RATINGS	120-277V											

SLIM22-M-100 @50W	3000K				4000K				5000K			
FORWARD THROW	45°	30°	15°	0°	45°	30°	15°	0°	45°	30°	15°	0°
INPUT WATTS	50.9W	50.9W	50.9W	50.9W	49.5W	49.5W	49.5W	49.5W	50.9W	50.9W	50.9W	50.9W
LUMENS	7,950	7,942	7,898	7,885	8,356	8,345	8,296	8,285	8,393	8,384	8,353	8,351
EFFICACY	156.2	156.0	155.2	154.9	168.8	168.6	167.6	167.4	164.9	164.7	164.1	164.1
CRI	82	82	82	82	84	84	84	84	83	83	83	83
VOLTAGE RATINGS	120-277V											

SLIM22-M-100

SLIM22-M-100 @100W	3000K				4000K				5000K			
FORWARD THROW	45°	30°	15°	0°	45°	30°	15°	0°	45°	30°	15°	0°
INPUT WATTS	104.2W	104.2W	104.1W	104.1W	99.4W	99.4W	99.3W	99.3W	104.1W	104.1W	104.1W	104.1W
LUMENS	14,420	14,400	14,316	14,299	15,774	15,759	15,679	15,670	15,277	15,239	15,231	15,218
EFFICACY	138.4	138.2	137.5	137.4	158.7	158.5	157.9	157.8	146.8	146.4	146.3	146.2
CRI	82	82	82	82	84	84	84	84	83	83	83	83
VOLTAGE RATINGS	480V											

SLIM22-M-100 @85W	3000K				4000K				5000K			
FORWARD THROW	45°	30°	15°	0°	45°	30°	15°	0°	45°	30°	15°	0°
INPUT WATTS	86.0W	86.0W	86.0W	86.0W	82.6W	82.6W	82.6W	82.6W	86.0W	86.0W	86.0W	86.0W
LUMENS	12,380	12,363	12,380	12,276	13,379	13,366	13,379	13,291	13,173	13,140	13,173	13,122
EFFICACY	144.0	143.8	144.0	142.7	162.0	161.8	162.0	160.9	153.2	152.8	153.2	152.6
CRI	82	82	82	82	84	84	84	84	83	83	83	83
VOLTAGE RATINGS	480V											

SLIM22 Adjustable Throw Wall Pack



PERFORMANCE

SLIM22-M-100 @70W	3000K				4000K				5000K			
FORWARD THROW	45°	30°	15°	0°	45°	30°	15°	0°	45°	30°	15°	0°
INPUT WATTS	71.8W	71.8W	71.8W	71.8W	69.4W	69.4W	69.4W	69.4W	71.8W	71.8W	71.8W	71.8W
LUMENS	10,620	10,605	10,544	10,531	11,396	11,385	11,328	11,321	11,278	11,250	11,244	11,234
EFFICACY	147.9	147.7	146.9	146.7	164.2	164.0	163.2	163.1	157.1	156.7	156.6	156.5
CRI	82	82	82	82	84	84	84	84	83	83	83	83
VOLTAGE RATINGS	480V											

SLIM22-M-100 @50W	3000K				4000K				5000K			
FORWARD THROW	45°	30°	15°	0°	45°	30°	15°	0°	45°	30°	15°	0°
INPUT WATTS	52.0W	52.0W	52.0W	52.0W	50.5W	50.5W	50.5W	50.5W	52.0W	52.0W	52.0W	52.0W
LUMENS	7,923	7,912	7,866	7,857	8,300	8,292	8,250	8,245	8,389	8,369	8,364	8,357
EFFICACY	152.4	152.2	151.3	151.1	164.4	164.2	163.4	163.3	161.3	160.9	160.8	160.7
CRI	82	82	82	82	84	84	84	84	83	83	83	83
VOLTAGE RATINGS	480V											

SLIM22-L-150

SLIM22-L-150 @150W	3000K				4000K				5000K			
FORWARD THROW	45°	30°	15°	0°	45°	30°	15°	0°	45°	30°	15°	0°
INPUT WATTS	152.6W	152.6W	152.5W	152.4W	145.7W	145.7W	145.5W	145.4W	152.8W	152.8W	152.7W	152.7W
LUMENS	21,436	21,420	21,285	21,123	23,431	23,426	23,234	23,159	22,739	22,734	22,597	22,510
EFFICACY	140.5	140.4	139.6	138.6	160.8	160.8	159.7	159.3	148.8	148.8	148.0	147.4
CRI	82	82	82	82	84	84	84	84	83	83	83	83
VOLTAGE RATINGS	120-277V											

SLIM22-L-150 @125W	3000K				4000K				5000K			
FORWARD THROW	45°	30°	15°	0°	45°	30°	15°	0°	45°	30°	15°	0°
INPUT WATTS	127.9W	127.9W	127.9W	127.9W	122.8W	122.8W	122.8W	122.8W	128.2W	128.2W	128.2W	128.2W
LUMENS	18,771	18,757	18,771	18,497	20,325	20,321	20,325	20,089	19,959	19,955	19,959	19,758
EFFICACY	146.8	146.7	146.8	144.6	165.5	165.5	165.5	163.6	155.7	155.7	155.7	154.1
CRI	82	82	82	82	84	84	84	84	83	83	83	83
VOLTAGE RATINGS	120-277V											

SLIM22-L-150 @100W	3000K				4000K				5000K			
FORWARD THROW	45°	30°	15°	0°	45°	30°	15°	0°	45°	30°	15°	0°
INPUT WATTS	103.2W	103.2W	103.2W	103.2W	99.7W	99.7W	99.7W	99.7W	103.2W	103.2W	103.2W	103.2W
LUMENS	15,968	15,956	15,856	15,735	16,998	16,995	16,855	16,801	16,787	16,783	16,682	16,618
EFFICACY	154.7	154.6	153.6	152.5	170.5	170.5	169.1	168.5	162.7	162.6	161.6	161.0
CRI	82	82	82	82	84	84	84	84	83	83	83	83
VOLTAGE RATINGS	120-277V											

SLIM22 Adjustable Throw Wall Pack



PERFORMANCE

SLIM22-L-150 @75W	3000K				4000K				5000K			
FORWARD THROW	45°	30°	15°	0°	45°	30°	15°	0°	45°	30°	15°	0°
INPUT WATTS	77.9W	77.9W	77.9W	77.9W	75.5W	75.5W	75.5W	75.5W	78.0W	78.0W	78.0W	78.0W
LUMENS	12,545	12,536	12,457	12,362	13,171	13,168	13,060	13,018	13,260	13,257	13,177	13,126
EFFICACY	161.0	160.9	159.9	158.7	174.5	174.4	173.0	172.4	170.0	170.0	168.9	168.3
CRI	82	82	82	82	84	84	84	84	83	83	83	83
VOLTAGE RATINGS	120-277V											

SLIM22-L-150

SLIM22-L-150 @150W	3000K				4000K				5000K			
FORWARD THROW	45°	30°	15°	0°	45°	30°	15°	0°	45°	30°	15°	0°
INPUT WATTS	153.6W	153.6W	153.5W	153.5W	146.7W	146.7W	146.6W	146.6W	153.6W	153.6W	153.5W	153.5W
LUMENS	21,827	21,815	21,703	21,665	23,960	23,941	23,835	23,806	23,209	23,191	23,093	23,070
EFFICACY	142.1	142.0	141.4	141.1	163.3	163.2	162.6	162.4	151.1	151.0	150.4	150.3
CRI	81	81	82	82	84	84	84	84	83	83	83	83
VOLTAGE RATINGS	480V											

SLIM22-L-150 @125W	3000K				4000K				5000K			
FORWARD THROW	45°	30°	15°	0°	45°	30°	15°	0°	45°	30°	15°	0°
INPUT WATTS	129.2W	129.2W	129.2W	129.2W	124.1W	124.1W	124.1W	124.1W	129.2W	129.2W	129.2W	129.2W
LUMENS	19,038	19,028	19,038	18,897	20,591	20,575	20,591	20,459	20,232	20,216	20,232	20,111
EFFICACY	147.4	147.3	147.4	146.3	165.9	165.8	165.9	164.9	156.6	156.5	156.6	155.7
CRI	82	82	82	82	84	84	84	84	83	83	83	83
VOLTAGE RATINGS	480V											

SLIM22-L-150 @100W	3000K				4000K				5000K			
FORWARD THROW	45°	30°	15°	0°	45°	30°	15°	0°	45°	30°	15°	0°
INPUT WATTS	101.8W	101.8W	101.8W	101.8W	98.5W	98.5W	98.5W	98.5W	101.8W	101.8W	101.8W	101.8W
LUMENS	15,684	15,676	15,595	15,568	16,692	16,679	16,605	16,585	16,534	16,521	16,451	16,435
EFFICACY	154.1	154.0	153.2	152.9	169.5	169.3	168.6	168.4	162.4	162.3	161.6	161.4
CRI	82	82	82	82	84	84	84	84	83	83	83	83
VOLTAGE RATINGS	480V											

SLIM22-L-150 @75W	3000K				4000K				5000K			
FORWARD THROW	45°	30°	15°	0°	45°	30°	15°	0°	45°	30°	15°	0°
INPUT WATTS	79.0W	79.0W	79.0W	79.0W	77.0W	77.0W	77.0W	77.0W	79.0W	79.0W	79.0W	79.0W
LUMENS	12,444	12,438	12,374	12,352	13,140	13,130	13,072	13,056	13,209	13,199	13,143	13,130
EFFICACY	157.5	157.4	156.6	156.4	170.6	170.5	169.8	169.6	167.2	167.1	166.4	166.2
CRI	82	82	82	82	84	84	84	84	83	83	83	83
VOLTAGE RATINGS	480V											

TECHNICAL SPECIFICATIONS

COMPLIANCE

UL Listed

This product is UL listed for wet locations

DLC Listed

This product family is listed with the Design Lights Consortium (DLC). Individual SKUs with this family may carry either a DLC Standard or DLC Premium qualification. Please refer to the individual product specification sheet or the DLC Qualified Product list (QPL) at designlights.org to confirm the qualification status of a specific SKU prior to specification or purchase.

FIELD ADJUSTABLE

Selectable Wattage:

SLIM22-S-30 : 30/25/20/15W (Default 30W)

SLIM22-S-60 : 60/50/40/30W (Default 60W)

SLIM22-M-100 : 100/85/70/50W (Default 100W)

SLIM22-L-150 : 150/125/100/75W (Default 150W)

CCT:

3000/4000/5000K (Default 4000K)

Forward throw Angle:

45°/30°/15°/0° (Default 0°)

CONSTRUCTION

IP Rating

Ingress protection rating of IP65 for dust and water

Cold Weather starting

Minimum starting temperature is -40°C (-40°F)

Cold Weather starting for Battery Backup

Minimum starting temperature is 0°C (32°F)

Maximum Ambient Temperature

Suitable for use in up to 40°C (104°F)

Maximum Ambient Temperature for Battery Backup

Suitable for use in up to 40°C (104°F)

Housing

Die-cast aluminum

Mounting

Hinged wiring access and conduit entries on the back sides, top and bottom make installation a snap

Lens

Polycarbonate lens

Gasket

Silicone

Green Technology

Mercury and UV free. RoHS-compliant components.

Finish

Formulated for high durability and long lasting color

ELECTRICAL

Drivers:

Class2, 50/60HZ 120-277V

SLIM22-S-30

30W: 0.28 A @120V, 0.17 @208V, 0.15A @240V, 0.13A @277V

25W: 0.24 A @120V, 0.14 @208V, 0.13A @240V, 0.11A @277V

20W: 0.19 A @120V, 0.12 @208V, 0.11A @240V, 0.09A @277V

15W: 0.14 A @120V, 0.09 @208V, 0.09A @240V, 0.08A @277V

SLIM22-S-60

60W: 0.56 A @120V, 0.34 @208V, 0.30A @240V, 0.27A @277V

50W: 0.47 A @120V, 0.30 @208V, 0.25A @240V, 0.23A @277V

40W: 0.38 A @120V, 0.24 @208V, 0.21A @240V, 0.19A @277V

30W: 0.29A @120V, 0.19 @208V, 0.17A @240V, 0.14A @277V

Class2, 50/60HZ 480V

SLIM22-S-30

30W: 0.08A @480V

25W: 0.07A @480V

20W: 0.06A @480V

15W: 0.05A @480V

SLIM22-S-60

60W: 0.16A @480V

50W: 0.13A @480V

40W: 0.11A @480V

30W: 0.08A @480V

Class2, 50/60HZ 120-277V

SLIM22-M-100

100W: 0.94A @120V, 0.56 @208V, 0.51A @240V, 0.46A @277V

85W: 0.80A @120V, 0.48 @208V, 0.43A @240V, 0.40A @277V

70W: 0.66A @120V, 0.39 @208V, 0.36A @240V, 0.35A @277V

50W: 0.47A @120V, 0.30 @208V, 0.28A @240V, 0.26A @277V

Class2, 50/60HZ 480V

SLIM22-M-100

100W: 0.28A @480V

85W: 0.25A @480V

70W: 0.23A @480V

50W: 0.16A @480V

Class2, 50/60HZ 120-277V

SLIM22-L-150

150W: 1.41A @120V, 0.84 @208V, 0.76A @240V, 0.68A @277V

125W: 1.20A @120V, 0.74 @208V, 0.64A @240V, 0.59A @277V

100W: 0.94A @120V, 0.60 @208V, 0.54A @240V, 0.50A @277V

75W: 0.69A @120V, 0.45 @208V, 0.43A @240V, 0.40A @277V

Class2, 50/60HZ 480V

SLIM22-L-150

150W: 0.39 @480V

125W: 0.32 @480V

100W: 0.28 @480V

75W: 0.25 @480V

Dimming Driver:

Driver includes dimming control wiring for 0-10V dimming systems. Requires separate 0-10V DC dimming circuit. Dims down to 10%.

Photocell:

120-277V selectable photocell that can be turned on and off.
480V selectable photocell that can be turned on and off.

Surge Protection:

DM(L/N):6KV,CM (L/N-PE) :6KV

SLIM22 Adjustable Throw Wall Pack



TECHNICAL SPECIFICATIONS

ELECTRICAL

THD / Power factor:

MODEL#	THD	PF	THD	PF	THD	PF
SLIM22-S @30W	120V		277V		480V	
45°	6.6%	99.5%	12.7%	94.8%	15.1%	91.2%
30°	6.7%	99.5%	12.7%	94.8%	14.5%	91.2%
15°	6.7%	99.5%	12.7%	94.8%	14.8%	91.2%
0°	6.6%	99.5%	12.7%	94.8%	14.8%	91.2%
SLIM22-S @60W	120V		277V		480V	
45°	5.2%	99.7%	10.7%	94.7%	12.9	94.8%
30°	5.2%	99.7%	10.6%	94.7%	12.8	94.8%
15°	5.3%	99.7%	10.8%	94.7%	12.8	94.8%
0°	5.2%	99.7%	10.7%	94.7%	12.9	94.8%
SLIM22-M @100W	120V		277V		480V	
45°	3.9%	99.8%	5.8%	95.0%	12.0	93.3%
30°	3.8%	99.8%	5.7%	95.0%	12.0	93.3%
15°	3.9%	99.8%	5.8%	95.0%	12.0	93.3%
0°	3.8%	99.8%	5.7%	95.0%	12.0	93.3%
SLIM22-L @150W	120V		277V		480V	
45°	4.7%	99.8%	7.3%	96.3%	11.2	95.1%
30°	4.7%	99.8%	7.3%	96.3%	11.2	95.1%
15°	4.7%	99.8%	7.3%	96.3%	11.2	95.1%
0°	4.7%	99.8%	7.2%	96.3%	11.1	95.1%

LED CHARACTERISTICS

LEDs

Long-life, high-efficacy, surface-mount LEDs

Color Uniformity

RAB's range of Correlated Color Temperature follows the guidelines of the American National Standards for Specifications for the Chromaticity of Solid State Lighting (SLL) Products, ANSI C78.377-2024.

OTHER

Warranty

The RAB 5-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.


Lifespan

100,000-hour LED lifespan based on IES LM-80 results and TM-21 calculations

DIMENSIONS


SLIM22-S

Weight: 6.0 lbs

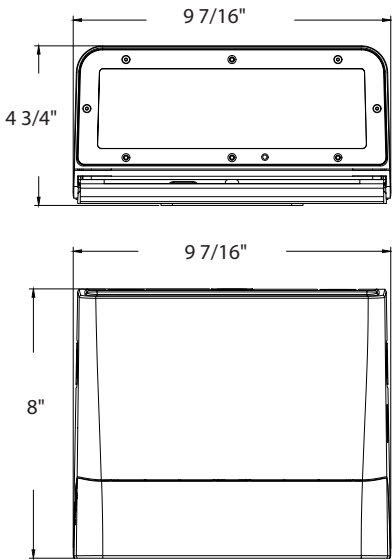

SLIM22-M

Weight: 8.4 lbs

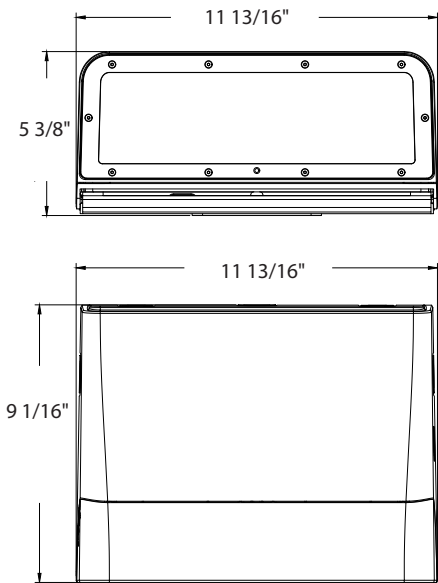


SLIM22 Adjustable Throw Wall Pack



DIMENSIONS

SLIM22-L
Weight: 11.7 lbs

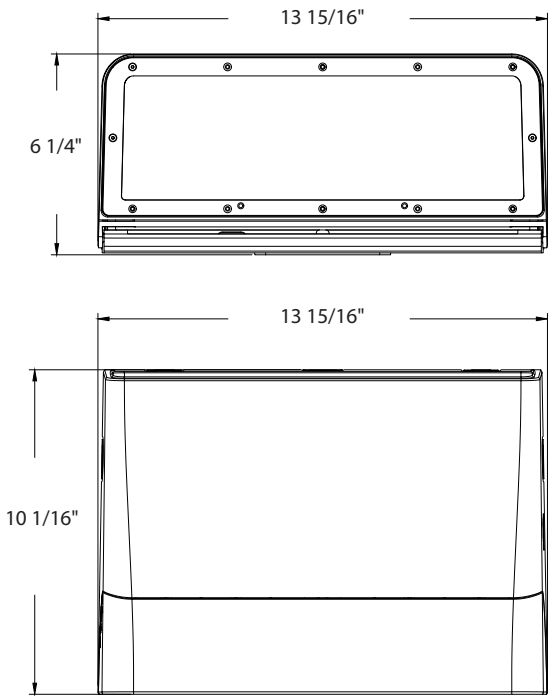

ORDERING MATRIX

SLIM22

Family	Size	Wattage	Color Temperature	Finish	Forward Throw	Driver	Options
SLIM22	- -						
	S Small* M Medium* L Large*	30 30/25/20/15W 60 60/50/40/30W 100 100/85/70/50W 150 150/125/100/75W	BLANK 3000/4000/5000K CCT Adjustable	BLANK Bronze W White	BLANK 0/15/30/45° Adjustable Throw	BLANK 120V-277V, 0-10V Dimming 480V, 0-10V Dimming /480	BLANK Selectable Photocell /E Selectable Photocell** w/Battery Backup

* Small available only in 30W or 60W models, medium available only in 100W model and large available only in 150W models
** Battery backup option only for 120-277V models