

SR Field-Adjustable Strip Light



2 ft



3 ft



4 ft



8 ft



PROJECT: _____

DATE: _____

TYPE: _____

PREPARED BY: _____



KEY FEATURES

- Available models in 4 sizes and selectable wattages:
 SR2: 2 ft (19/15/11/7/4W) 19W default
 SR3: 3 ft (30/26/22/18/14W) 30W default
 SR4L: 4 ft (28/24/20/16/12W) 28W default
 SR4: 4 ft (40/35/30/25/20W) 40W default
 SR8: 8 ft (60/52/44/36/28W) 60W default
 SR8H: 8 ft (85/75/65/55/45W) 85W default
- Field-adjustable CCT: 3500/4000/5000/5700/6000K (4000K default)
- Standard **J-Box** adapter. **V-hooks** are optional accessory for suspended mounting and **Joiner Kit** available for daisy chain use.
- UL Listed for **damp** locations
- 0-10V** dimming. Lightcloud Blue models do not require a 0-10V dimming circuit.
- 5-Year, limited warranty

Integrated controls with Lightcloud Blue



DIMMABLE



100,000 HOURS



FIELD ADJUSTABLE



DAMP RATED



POWERED BY LIGHTCLOUD

Lightcloud[®]

LIGHTCLOUD BLUE

PERFORMANCE

SR 2 ft:

| SR2 | 3500K | 4000K | 5000K | 5700K | 6000K | 3500K | 4000K | 5000K | 5700K | 6000K | 3500K | 4000K | 5000K | 5700K | 6000K |
|----------------|----------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| WATTAGE | 19W | | | | | 15W | | | | | 11W | | | | |
| INPUT WATTS | 20.0W | 20.1W | 20.0W | 20.0W | 20.0W | 15.1W | 15.1W | 15.0W | 15.0W | 15.0W | 10.9W | 10.9W | 10.9W | 10.8W | 10.8W |
| LUMENS | 2,839 | 2,880 | 2,883 | 2,881 | 2,880 | 2,098 | 2,092 | 2,087 | 2,085 | 2,085 | 1,502 | 1,502 | 1,509 | 1,490 | 1,483 |
| EFFICACY | 142 | 143.8 | 142.9 | 142.3 | 141.7 | 138.9 | 138.7 | 138.7 | 138.7 | 138.8 | 138.3 | 138.4 | 138.8 | 138.0 | 137.8 |
| CRI | 84 | 85 | 86 | 86 | 86 | 83 | 85 | 86 | 86 | 85 | 83 | 85 | 86 | 86 | 85 |
| VOLTAGE RATING | 120-277V | | | | | | | | | | | | | | |

| SR2 | 3500K | 4000K | 5000K | 5700K | 6000K | 3500K | 4000K | 5000K | 5700K | 6000K |
|----------------|----------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| WATTAGE | 7W | | | | | 4W | | | | |
| INPUT WATTS | 7.2W | 7.2W | 7.2W | 7.2W | 7.2W | 4.7W | 4.6W | 4.6W | 4.6W | 4.6W |
| LUMENS | 951 | 949 | 948 | 947 | 948 | 552 | 550 | 550 | 548 | 549 |
| EFFICACY | 132.2 | 132.0 | 132.1 | 132.1 | 132.5 | 118.8 | 118.4 | 118.5 | 118.4 | 118.7 |
| CRI | 84 | 85 | 86 | 85 | 85 | 84 | 85 | 86 | 86 | 85 |
| VOLTAGE RATING | 120-277V | | | | | | | | | |

SR Field-Adjustable Strip Light



PERFORMANCE (CONTINUED)

SR 3 ft:

| SR3 | 3500K | 4000K | 5000K | 5700K | 6000K | 3500K | 4000K | 5000K | 5700K | 6000K | 3500K | 4000K | 5000K | 5700K | 6000K |
|----------------|----------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| WATTAGE | 30W | | | | | 26W | | | | | 22W | | | | |
| INPUT WATTS | 29.8W | 30.0W | 30.0W | 29.9W | 29.9W | 26.6W | 26.5W | 26.5W | 26.4W | 26.4W | 21.5W | 21.5W | 21.5W | 21.5W | 21.4W |
| LUMENS | 4,259 | 4,308 | 4,311 | 4,316 | 4,317 | 3,784 | 3,779 | 3,775 | 3,771 | 3,769 | 3,115 | 3,115 | 3,118 | 3,120 | 3,092 |
| EFFICACY | 143.2 | 144.2 | 144.8 | 145.0 | 145.4 | 142.4 | 142.6 | 142.7 | 142.8 | 143.0 | 145.1 | 145.1 | 145.3 | 145.4 | 144.7 |
| CRI | 84 | 86 | 86 | 87 | 86 | 84 | 86 | 87 | 87 | 86 | 84 | 86 | 86 | 87 | 86 |
| VOLTAGE RATING | 120-277V | | | | | | | | | | | | | | |

| SR3 | 3500K | 4000K | 5000K | 5700K | 6000K | 3500K | 4000K | 5000K | 5700K | 6000K |
|----------------|----------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| WATTAGE | 18W | | | | | 14W | | | | |
| INPUT WATTS | 17.7W | 17.7W | 17.7W | 17.7W | 17.6W | 14.1W | 14.1W | 14.0W | 14.0W | 14.0W |
| LUMENS | 2,575 | 2,580 | 2,580 | 2,579 | 2,578 | 2,051 | 2,048 | 2,046 | 2,042 | 2,036 |
| EFFICACY | 145.6 | 145.8 | 146.0 | 146.1 | 146.2 | 145.8 | 145.7 | 145.7 | 145.7 | 145.6 |
| CRI | 84 | 86 | 87 | 87 | 86 | 85 | 86 | 87 | 87 | 86 |
| VOLTAGE RATING | 120-277V | | | | | | | | | |

SR 4 ft LOW WATTAGE:

| SR4L | 3500K | 4000K | 5000K | 5700K | 6000K | 3500K | 4000K | 5000K | 5700K | 6000K | 3500K | 4000K | 5000K | 5700K | 6000K |
|----------------|----------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| WATTAGE | 28W | | | | | 24W | | | | | 20W | | | | |
| INPUT WATTS | 27.9W | 28.2W | 28.2W | 28.2W | 28.2W | 23.8W | 23.7W | 23.6W | 23.6W | 23.6W | 19.6W | 19.6W | 19.6W | 19.6W | 19.6W |
| LUMENS | 4,012 | 4,070 | 4,069 | 4,069 | 4,076 | 3,394 | 3,355 | 3,337 | 3,331 | 3,327 | 2,796 | 2,795 | 2,792 | 2,788 | 2,776 |
| EFFICACY | 144.0 | 141.9 | 142.0 | 142.0 | 142.2 | 142.5 | 141.5 | 141.2 | 141.0 | 141.0 | 142.4 | 142.3 | 142.2 | 142.1 | 141.7 |
| CRI | 84 | 86 | 86 | 86 | 85 | 85 | 86 | 87 | 87 | 86 | 85 | 86 | 87 | 87 | 86 |
| VOLTAGE RATING | 120-277V | | | | | | | | | | | | | | |

| SR4L | 3500K | 4000K | 5000K | 5700K | 6000K | 3500K | 4000K | 5000K | 5700K | 6000K |
|----------------|----------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| WATTAGE | 16W | | | | | 12W | | | | |
| INPUT WATTS | 15.9W | 15.9W | 15.9W | 15.9W | 15.9W | 12.0W | 12.0W | 12.0W | 11.9W | 11.9W |
| LUMENS | 2,255 | 2,260 | 2,261 | 2,260 | 2,260 | 1,685 | 1,683 | 1,681 | 1,677 | 1,673 |
| EFFICACY | 142.2 | 142.3 | 142.3 | 142.3 | 142.3 | 140.9 | 140.7 | 140.6 | 140.4 | 140.3 |
| CRI | 85 | 86 | 87 | 87 | 86 | 85 | 86 | 87 | 87 | 86 |
| VOLTAGE RATING | 120-277V | | | | | | | | | |

SR Field-Adjustable Strip Light



PERFORMANCE (CONTINUED)

SR 4 ft:

| SR4 | 3500K | 4000K | 5000K | 5700K | 6000K | 3500K | 4000K | 5000K | 5700K | 6000K | 3500K | 4000K | 5000K | 5700K | 6000K |
|----------------|----------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| WATTAGE | 40W | | | | | 35W | | | | | 30W | | | | |
| INPUT WATTS | 40.5W | 40.3W | 40.2W | 40.2W | 40.2W | 34.7W | 34.6W | 34.6W | 34.5W | 34.5W | 29.4W | 29.4W | 29.4W | 29.4W | 29.4W |
| LUMENS | 5,791 | 5,879 | 5,884 | 5,891 | 5,892 | 4,919 | 4,910 | 4,908 | 4,908 | 4,904 | 4,242 | 4,248 | 4,249 | 4,246 | 4,247 |
| EFFICACY | 143.1 | 140.2 | 141.3 | 141.6 | 142.0 | 141.8 | 141.9 | 142.0 | 142.1 | 142.1 | 144.3 | 144.4 | 144.6 | 144.5 | 144.7 |
| CRI | 83 | 85 | 86 | 86 | 86 | 85 | 86 | 87 | 87 | 86 | 85 | 86 | 87 | 87 | 86 |
| VOLTAGE RATING | 120-277V | | | | | | | | | | | | | | |

| SR4 | 3500K | 4000K | 5000K | 5700K | 6000K | 3500K | 4000K | 5000K | 5700K | 6000K |
|----------------|----------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| WATTAGE | 25W | | | | | 20W | | | | |
| INPUT WATTS | 24.7W | 24.7W | 24.7W | 24.7W | 24.6W | 19.6W | 19.6W | 19.6W | 19.6W | 19.5W |
| LUMEN4 | 3,602 | 3,610 | 3,612 | 3,610 | 3,609 | 2,892 | 2,892 | 2,890 | 2,887 | 2,878 |
| EFFICACY | 145.9 | 146.1 | 146.3 | 146.3 | 146.4 | 147.4 | 147.5 | 147.6 | 147.5 | 147.4 |
| CRI | 85 | 86 | 87 | 87 | 86 | 85 | 86 | 87 | 87 | 86 |
| VOLTAGE RATING | 120-277V | | | | | | | | | |

SR 8 ft:

| SR8 | 3500K | 4000K | 5000K | 5700K | 6000K | 3500K | 4000K | 5000K | 5700K | 6000K | 3500K | 4000K | 5000K | 5700K | 6000K |
|----------------|----------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| WATTAGE | 60W | | | | | 52W | | | | | 44W | | | | |
| INPUT WATTS | 61.7W | 58.6W | 59.8W | 58.2W | 58.3W | 51.3W | 51.2W | 51.2W | 51.2W | 51.1W | 44.0W | 44.0W | 44.0W | 44.0W | 43.9W |
| LUMENS | 8,833 | 8,969 | 8,977 | 8,986 | 8,988 | 7,334 | 7,315 | 7,310 | 7,302 | 7,294 | 6,361 | 6,367 | 6,369 | 6,367 | 6,357 |
| EFFICACY | 143.1 | 142.4 | 143.0 | 143.3 | 143.1 | 143.1 | 142.8 | 142.8 | 142.7 | 142.6 | 144.7 | 144.7 | 144.8 | 144.7 | 144.7 |
| CRI | 83 | 85 | 86 | 86 | 86 | 85 | 86 | 87 | 87 | 86 | 85 | 87 | 87 | 87 | 86 |
| VOLTAGE RATING | 120-277V | | | | | | | | | | | | | | |

| SR8 | 3500K | 4000K | 5000K | 5700K | 6000K | 3500K | 4000K | 5000K | 5700K | 6000K |
|----------------|----------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| WATTAGE | 36W | | | | | 28W | | | | |
| INPUT WATTS | 35.8W | 35.8W | 35.8W | 35.8W | 35.7W | 27.5W | 27.5W | 27.5W | 27.5W | 27.5W |
| LUMEN4 | 5,247 | 5,251 | 5,254 | 5,251 | 5,251 | 4,072 | 4,073 | 4,074 | 4,075 | 4,078 |
| EFFICACY | 146.7 | 146.7 | 146.9 | 146.9 | 147.1 | 148.2 | 148.2 | 148.3 | 148.3 | 148.4 |
| CRI | 85 | 87 | 87 | 87 | 86 | 85 | 87 | 87 | 87 | 86 |
| VOLTAGE RATING | 120-277V | | | | | | | | | |

SR Field-Adjustable Strip Light



PERFORMANCE (CONTINUED)

SR 8 ft HIGH WATTAGE:

| SR8H | 3500K | 4000K | 5000K | 5700K | 6000K | 3500K | 4000K | 5000K | 5700K | 6000K | 3500K | 4000K | 5000K | 5700K | 6000K |
|----------------|----------|--------|--------|--------|--------|--------|--------|--------|--------|--------|-------|-------|-------|-------|-------|
| WATTAGE | 85W | | | | | 75W | | | | | 65W | | | | |
| INPUT WATTS | 85.9W | 86.3W | 86.4W | 86.4W | 86.4W | 76.1W | 75.9W | 75.8W | 75.8W | 75.7W | 65.1 | 65.2 | 65.1 | 65.0 | 64.9 |
| LUMENS | 12,423 | 12,604 | 12,604 | 12,459 | 12,624 | 10,662 | 10,597 | 10,595 | 10,586 | 10,574 | 9,281 | 9,290 | 9,286 | 9,277 | 9,247 |
| EFFICACY | 144.6 | 143.3 | 142.4 | 142.0 | 141.6 | 140.2 | 139.6 | 139.7 | 139.7 | 139.7 | 142.5 | 142.5 | 142.7 | 142.6 | 142.4 |
| CRI | 84 | 86 | 86 | 86 | 85 | 84 | 85 | 86 | 86 | 85 | 84 | 85 | 86 | 86 | 85 |
| VOLTAGE RATING | 120-277V | | | | | | | | | | | | | | |

| SR8H | 3500K | 4000K | 5000K | 5700K | 6000K | 3500K | 4000K | 5000K | 5700K | 6000K |
|----------------|----------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| WATTAGE | 55W | | | | | 45W | | | | |
| INPUT WATTS | 54.6W | 54.6W | 54.5W | 54.5W | 54.4W | 44.5W | 44.5W | 44.4W | 44.4W | 44.4W |
| LUMEN4 | 7,914 | 7,923 | 7,922 | 7,918 | 7,916 | 6,560 | 6,559 | 6,561 | 6,560 | 6,551 |
| EFFICACY | 145.0 | 145.2 | 145.3 | 145.4 | 145.6 | 147.5 | 147.4 | 147.7 | 147.7 | 147.6 |
| CRI | 84 | 85 | 86 | 86 | 85 | 84 | 85 | 86 | 86 | 85 |
| VOLTAGE RATING | 120-277V | | | | | | | | | |

TECHNICAL SPECIFICATIONS

COMPLIANCE

UL Listed

Suitable for damp locations

IESNA LM-79 & LM-80 Testing

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80

DLC Listed

This product family is listed with the DesignLights Consortium (DLC). Individual SKUs within this family may carry either a DLC Standard or DLC Premium qualification. Please refer to the individual product specification sheet or the DLC Qualified Products List (QPL) at designlights.org to confirm the qualification status of a specific SKU prior to specification or purchase.

LED CHARACTERISTICS

LEDs

Long-life, high-efficacy, discrete, surface-mount LEDs

Color Consistency

4-step MacAdam Ellipse binning to achieve consistent fixture-to-fixture color

Color Uniformity

RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

CONSTRUCTION

Cold Weather Starting

The minimum starting temperature is -20°C (-4°F)

Cold Weather Starting for battery back-up

The minimum starting temperature is 0°C (32°F)

Maximum Ambient Temperature

Suitable for use in up to 50°C (122°F)

Maximum Ambient Temperature for battery back-up

2 Ft: Suitable for use in up to 50°C (122°F)

Mounting

Surface mounting standard. V-Hooks and Chain mounting available (ordered separately, SR VHOOK KIT).

Housing

Galvanized Steel (Painted white)

Lens

Frosted polycarbonate

Finish

Formulated for high durability and long-lasting color

Green Technology

Mercury and UV free. RoHS-compliant components.

TECHNICAL SPECIFICATIONS

FACTORY DEFAULT SETTINGS

| MODEL# | DEFAULT WATTAGE | DEFAULT COLOR TEMPERATURE |
|--------|-----------------|---------------------------|
| SR2 | 19W | 4000K |
| SR3 | 30W | 4000K |
| SR4L | 28W | 4000K |
| SR4 | 40W | 4000K |
| SR8 | 60W | 4000K |
| SR8H | 85W | 4000K |

ELECTRICAL (CONTINUED)

Drivers: Constant Current, Class 2, Class P, 120-277V, 50/60 Hz, SR2

19W: 120V: 0.175A, 208V: 0.11A, 240V: 0.0875A, 277V: 0.075A

15W: 120V: 0.13A, 208V: 0.072A, 240V: 0.0625A, 277V: 0.054A

11W: 120V: 0.09A, 208V: 0.052A, 240V: 0.045A, 277V: 0.039A

7W: 120V: 0.058A, 208V: 0.033A, 240V: 0.029A, 277V: 0.025A

4W: 120V: 0.033A, 208V: 0.019A, 240V: 0.016A, 277V: 0.02A

SR3

30W: 120V: 0.27A, 208V: 0.15A, 240V: 0.13A, 277V: 0.12A

26W: 120V: 0.22A, 208V: 0.13A, 240V: 0.11A, 277V: 0.10A

22W: 120V: 0.18A, 208V: 0.11A, 240V: 0.09A, 277V: 0.08A

18W: 120V: 0.15A, 208V: 0.09A, 240V: 0.08A, 277V: 0.06A

14W: 120V: 0.12A, 208V: 0.07A, 240V: 0.06A, 277V: 0.05A

SR4L

28W: 120V: 0.25A, 208V: 0.14A, 240V: 0.13A, 277V: 0.11A

24W: 120V: 0.20A, 208V: 0.12A, 240V: 0.11A, 277V: 0.09A

20W: 120V: 0.17A, 208V: 0.10A, 240V: 0.08A, 277V: 0.07A

16W: 120V: 0.13A, 208V: 0.08A, 240V: 0.07A, 277V: 0.06A

12W: 120V: 0.13A, 208V: 0.06A, 240V: 0.05A, 277V: 0.04A

SR4

40W: 120V: 0.35A, 208V: 0.21A, 240V: 0.18A, 277V: 0.15A

35W: 120V: 0.29A, 208V: 0.17A, 240V: 0.15A, 277V: 0.13A

30W: 120V: 0.25A, 208V: 0.14A, 240V: 0.13A, 277V: 0.11A

25W: 120V: 0.21A, 208V: 0.12A, 240V: 0.10A, 277V: 0.09A

20W: 120V: 0.16A, 208V: 0.10A, 240V: 0.08A, 277V: 0.07A

SR8

60W: 120V: 0.52A, 208V: 0.30A, 240V: 0.26A, 277V: 0.22A

52W: 120V: 0.43A, 208V: 0.25A, 240V: 0.22A, 277V: 0.19A

44W: 120V: 0.37A, 208V: 0.21A, 240V: 0.18A, 277V: 0.16A

36W: 120V: 0.30A, 208V: 0.17A, 240V: 0.15A, 277V: 0.13A

28W: 120V: 0.23A, 208V: 0.13A, 240V: 0.12A, 277V: 0.10A

SR8H

85W: 120V: 0.73A, 208V: 0.42A, 240V: 0.36A, 277V: 0.32A

75W: 120V: 0.63A, 208V: 0.36A, 240V: 0.31A, 277V: 0.27A

65W: 120V: 0.54A, 208V: 0.31A, 240V: 0.27A, 277V: 0.23A

55W: 120V: 0.46A, 208V: 0.26A, 240V: 0.23A, 277V: 0.20A

45W: 120V: 0.38A, 208V: 0.21A, 240V: 0.18A, 277V: 0.16A

Dimming Driver

Driver includes dimming control wiring for 0-10V dimming systems.

Requires separate 0-10V DC dimming circuit. Dims down to 10%.

Note: Lightcloud Blue models do not require a 0-10V dimming circuit.

ELECTRICAL (CONTINUED)

THD

SR2: 6.82% at 120V, 8.64% at 277V

SR3: 4.55% at 120V, 8.12% at 277V

SR4L: 5.24% at 120V, 8.1% at 277V

SR4: 6.54% at 120V, 13.12% at 277V

SR8: 7.66% at 120V, 11.36% at 277V

SR8H: 8.52% at 120V, 8.75% at 277V

Power Factor

SR2: 99.7% at 120V, 96.4% at 277V

SR3: 99.9% at 120V, 95.6% at 277V

SR4L: 99.9% at 120V, 95.2% at 277V

SR4: 99.8% at 120V, 97.0% at 277V

SR8: 99.6% at 120V, 95.3% at 277V

SR8H: 99.4% at 120V, 95.1% at 277V

Surge Protection

L-N 1KV, L/N-G 2KV

Battery Backup Light Loss Factor

SR2:

19W: 0.22

15W: 0.31

11W: 0.43

7W: 0.68

4W: 1.17

SR3:

30W: 0.15

26W: 0.17

22W: 0.21

18W: 0.25

14W: 0.32

SR4L:

28W: 0.35

24W: 0.43

20W: 0.52

16W: 0.64

12W: 0.86

SR4:

40W: 0.25

35W: 0.30

30W: 0.34

25W: 0.41

20W: 0.52

SR8:

60W: 0.17

52W: 0.21

44W: 0.24

36W: 0.29

28W: 0.37

SR8H:

85W: 0.12

75W: 0.14

65W: 0.16

55W: 0.19

45W: 0.23

TECHNICAL SPECIFICATIONS (CONTINUED)

OCCUPANCY SENSOR

Sensor Type: Passive Infrared (PIR) or Microwave (MVS)

Input Voltage: 12VDC

Operating Frequency: 50/60Hz

Input Current: 30mA

Operating Temperature: -40°F to 140°F (-20°C to 60°C)

Max Mounting Height: 8 ft. (PIR); 12 ft (MVS)

Detection Range: PIR: 20 ft. diameter mounted at 50 ft. (/PIR & /LCBS); MVS: 50 ft. diameter mounted at 9 ft. (/MVS & /LCBS/MVS); PIR20[B]/LCB] and MVS20[B]/LCB] 20 ft. diameter mounted at 9 ft. (sold separately)

Daylight Sensing: TDim levels will continuously adjust based on the daylight threshold level set in the Lightcloud Blue mobile app.

Default Settings:

Motion Sensitivity: High

Brightness when triggered : 100%

Hold time: 1 minute (20 minutes for LCB sensors)

Standby to dim: 20%

Standby time: 1 minute

When vacant: Off

OCCUPANCY SENSOR (CONTINUED)

Adjustable Settings: Settings for Lightcloud Blue-enabled sensors can be adjusted using the mobile app. All other sensors will require MSR1 Remote to adjust the following sensor settings:

Standby to dim: 10%/20%/30%/50%

Standby time: 0s/10s/30s/1min/5min/10min/30min/60min/+∞

Daylight Threshold: 2Lux/10Lux/30Lux/50Lux/80Lux/120Lux/Disable

OTHER

Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the BUY American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

Warranty

The RAB 5-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Lifespan

100,000-hour LED lifespan based on IES LM-80 results and TM-21 calculations

SR Field-Adjustable Strip Light



WIRELESS NETWORK LIGHTING CONTROLS

Lightcloud products offer integrated network lighting control for a truly wireless solution that allows you to manage RAB's various compatible devices. With RAB's patented Rapid Provisioning technology, devices can be quickly and easily commissioned for residential and commercial applications. Each device can communicate with other devices in the mesh network. With two Lightcloud systems to choose from, it's easy to implement controls anywhere.




Learn more about Lightcloud wireless networked lighting controls.

Design Lights Consortium Network Lighting Controls:

- Interior Applications: N1XMLOEATB
- Exterior Applications: NHCZ2BIA17L

Lightcloud®

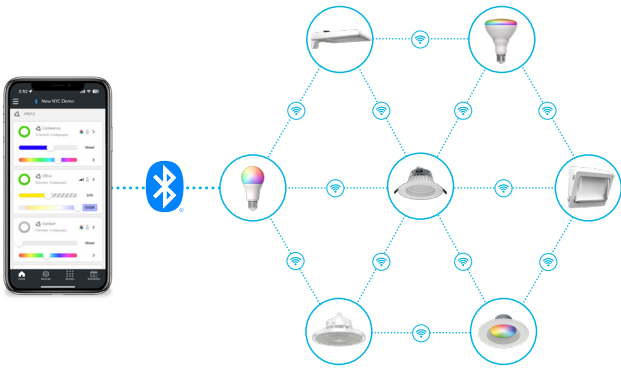

- Utilizes Bluetooth Mesh, eliminating the need for a Gateway or Hub
- Ideal for applications that need basic wireless control such as ON/OFF, dimming, color tuning, Schedules, and SmartShift
- Download the Lightcloud Blue mobile app for iOS or Android devices
- Add the XDIM/BRIDGE/LCB and LCGATEWAY to adopt premium Lightcloud Enterprise features

SIMPLE SETUP

- 1** Download the app.
- 2** Connect product to power.
- 3** Pair product to app.
- 4** Enjoy!

Learn more about [Lightcloud Blue](#). Visit the [Lightcloud Blue Resources](#) page for more information on how to use the system.

Lightcloud®



- Utilizes a secure cellular and Zigbee mesh network that requires a Gateway or Hub (sold separately)
- Offers premium features like remote commissioning, demand response, BACnet integration, and more
- Download the Lightcloud Enterprise mobile app for iOS Or Android devices

SIMPLE SETUP




- 1** Download the app.
- 2** Complete the start-up document.
- 3** Connect product to power.
- 4** Contact RAB for Remote Commissioning.
- 5** Enjoy!

Learn more about [Lightcloud Enterprise](#). Visit the [Lightcloud Enterprise Resources](#) page for more information on how to use the system.


SR Field-Adjustable Strip Light



ACCESSORIES (CONTINUED)

| IMAGE | SKU# | UPC | DESCRIPTION |
|---|---------------------|--------------|--|
|  | MSR1 | 192552026055 | SULTI-SENSOR REMOTE CONTROL IP20 |
|  | SRVHOOK KIT | 192552004206 | SR VHOOK MOUNT KIT 2-40" CHAIN, ANCHOR, SCREWS |
|  | SR-JOIN-KIT-G2 | 192552046633 | SR END JOIN SURFACE MOUNT KIT |
|  | SR-JOINT-BRACKET-G2 | 192552046640 | SR JOINT BRACKET NO WIRED |

DIMENSIONS

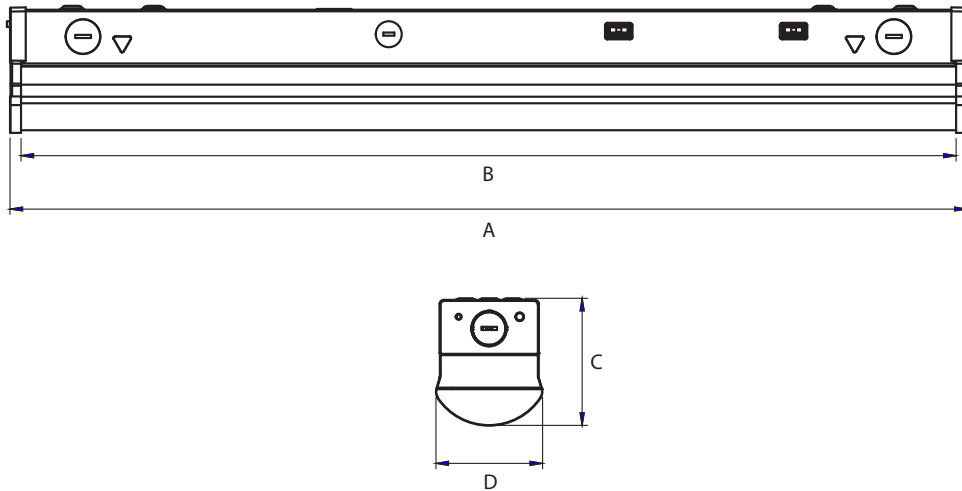

| MODEL# | A | B | C | D | Weight |
|--------|-----|-----------------------------------|----------------------------------|-----------------------------------|----------|
| SR2 | 24" | 23 ⁷ / ₁₆ " | 3 ³ / ₁₆ " | 2 ¹¹ / ₁₆ " | 1.81 lbs |
| SR3 | 36" | 35 ⁷ / ₁₆ " | 3 ³ / ₁₆ " | 2 ¹¹ / ₁₆ " | 2.38 lbs |
| SR4L | 48" | 46 ¹ / ₄ " | 3 ³ / ₁₆ " | 2 ¹¹ / ₁₆ " | 3.12 lbs |
| SSR4 | 48" | 46 ¹ / ₄ " | 3 ³ / ₁₆ " | 2 ¹¹ / ₁₆ " | 3.12 lbs |
| SR8 | 96" | 95 ⁷ / ₁₆ " | 3 ³ / ₁₆ " | 2 ¹¹ / ₁₆ " | 5.58 lbs |
| SR8H | 96" | 95 ⁷ / ₁₆ " | 3 ³ / ₁₆ " | 2 ¹¹ / ₁₆ " | 5.69 lbs |

SR Field-Adjustable Strip Light



ORDERING MATRIX

SR Field-Adjustable Strip Light

| Family | Size/Wattages | Mounting | Color Temperature | Finish | Driver | Controls | Battery Backup |
|-----------|------------------------|---------------------|---|-------------|----------------------------------|---|---------------------------------|
| SR | | | | | | | |
| 2 | 2 ft (19/15/11/7/4W) | BLANK J-Box Adaptor | BLANK 3500/4000/5000/ 5700/6000K CCT Adjustable | BLANK White | BLANK 120-277V, 0-10V Dimming | BLANK None /MVS Microwave Sensor /PIR Passive Infrared Sensor /LCBS Lightcloud Blue w/PIR Sensor /LCBS/MVS Lightcloud Blue w/MVS Sensor | BLANK None /E Battery Backup |
| 3 | 3 ft (30/26/22/18/14W) | | | | | | |
| 4L | 4 ft (28/24/20/16/12W) | | | | | | |
| 4 | 4 ft (40/35/30/25/20W) | | | | | | |
| 8 | 8 ft (60/52/44/36/28W) | | | | | | |
| 8H | 8 ft (85/75/65/55/45W) | | | | | | |