

# INSTRUCTION


## STRING LIGHT SERIES




RAB Lighting is committed to creating high-quality, affordable, well-designed and energy-efficient LED lighting and controls that make it easy for electricians to install and end users to save energy. We'd love to hear your comments. Please call the Marketing Department at 888-RAB-1000 or email: [marketing@rablighting.com](mailto:marketing@rablighting.com)

### STRING-XXX-850

50W



100W

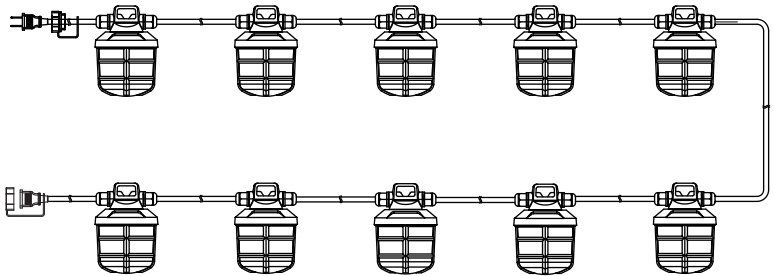

## IMPORTANT

**READ CAREFULLY BEFORE INSTALLING LED TEMP LIGHT. RETAIN THESE INSTRUCTIONS FOR FUTURE REFERENCE.**

RAB String light must be wired in accordance with the National Electrical Code and all applicable codes. Proper grounding is required for safety. THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.

### WARNINGS:

- Input Voltage: 120VAC
- Operating temperature: -30°C to 45°C (-22°F to 113°F).
- Please read this manual carefully before use, make sure the application is in accordance with the instructions.
- To reduce the risk of electric shock and fire, do not exceed string maximum wattage including any additional string loads. Maximum number of connection lamps:
  - 50W - 6 Units Max
  - 100W - 3 Units Max
- This device is suitable for dry, damp and wet locations.
- Disconnect the power to avoid shock when the equipment is wet.
- This device is not intended for use with emergency exits.
- The product should not be installed in heat and sealed environment and corrosive gases, and other places, so as not to affect the service life.
- This luminaire must be installed, tested and maintained by professionals using special equipment.
- Please check the product carefully after opening the package. If any products are damaged, please keep the original package and contact your local dealer.
- Do not cut the cable and do not connect with other electric devices.
- CAUTION: RISK OF ELECTRIC SHOCK, Do not use with extension cord near water or where water may accumulate. Keep lamp at least 16 feet from pools and spas. Keep plugs and receptacles dry.
- CAUTION - To reduce the risk of electric shock do not connect or disconnect when wet.
- For use only on GFCI protected circuits.
- Insert in receptacle when not in use.

# INSTRUCTION

## STRING LIGHT SERIES




RAB Lighting is committed to creating high-quality, affordable, well-designed and energy-efficient LED lighting and controls that make it easy for electricians to install and end users to save energy. We'd love to hear your comments. Please call the Marketing Department at 888-RAB-1000 or email: [marketing@rablighting.com](mailto:marketing@rablighting.com)

## INSTALLATION INSTRUCTION


1. Turn off the power before installation.
2. Remove the cable tie during installation.
3. Tie the fixture on a fixed pipe through the hook with strong nylon cable or Iron wire.
4. Close the plug protection cover in the end if there is no further connection to other lamps.
5. Linkable: connect the male connector to the last female connector and make sure connect firmly.

## INSTALLATION DIAGRAM

### Step: 1

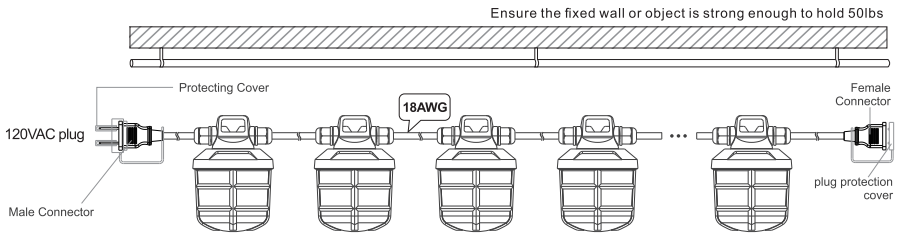

### Step: 2

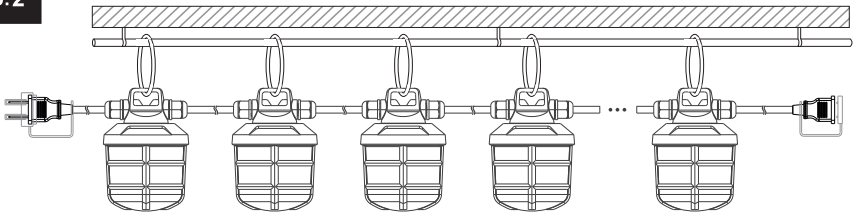

**Note:** These instructions do not cover all details or variations in equipment nor do they provide for every possible situation during installation, operation or maintenance.