



All the benefits of a panel
without all the cost.

Tight budget? No problem. T34 is here to save the day!

T34TM



RAB[®]

RABLIGHTING.COM • 888 722-1000

T34™ LED Panel



RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty

- Available in 2 sizes: 2x2 (20W, 30W, 40W) and 2x4 (30W, 40W, 50W)
- 0-10V dimmable driver, standard
- IC rated and Chicago Plenum (CCEA) compliant
- Lightcloud-enabled models offered
- 50,000-Hour LED lifespan
- Multiple-unit cartons reduce on-site waste

Tight spaces? No problem.

The T34's low-profile design is IC rated for direct contact with ceiling insulation, and is also Chicago Plenum (CCEA) compliant. Integral earthquake clips secure the panel to T-bars and won't get lost during installation.




Seeing is believing.

A frosted, polystyrene lens diffuses light, making the T34 ideal for areas that require uniform, glare-free distribution. The standard 0-10V dimmable driver allows for dialed-in control over your light output.



Simple, powerful lighting control.


All models are available with factory-installed Lightcloud® integration, for use with our commercial, wireless lighting control system and service.

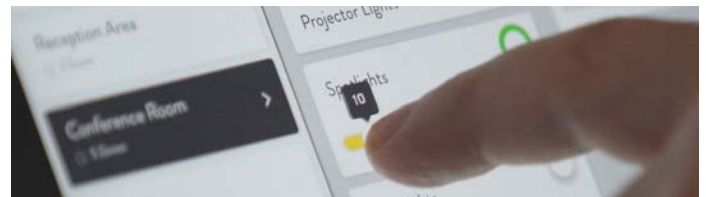

Dimensions & weights


2x4 (30W, 40W, 50W)

Weight: 8.95lbs.

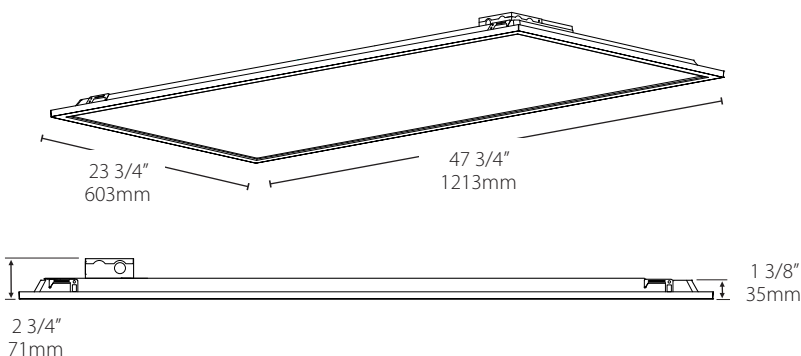

2x2 (20W, 30W, 40W)

Weight: 5.19 lbs.

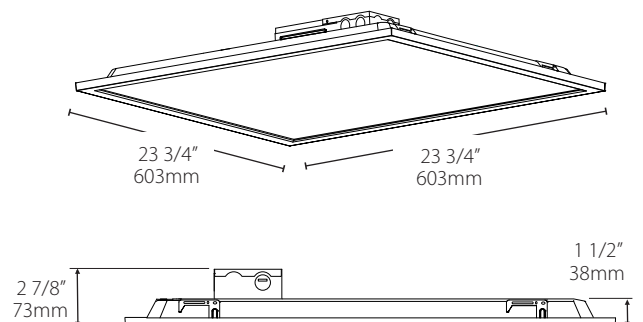

Performance

2x2	20W			30W			40W		
	5000K	4000K	3500K	5000K	4000K	3500K	5000K	4000K	3500K
Input Watts	21	22	21	27	28	27	38	38	41
Lumens	2,168	2,452	2,379	2,904	3,284	3,186	4,466	4,457	4,705
Efficacy (lm/W)	103	112	114	108	118	119	116	117	116
Color Accuracy (CRI)	81	80	82	81	80	81	81	81	81

2x4	30W			40W			50W		
	5000K	4000K	3500K	5000K	4000K	3500K	5000K	4000K	3500K
Input Watts	31	32	29	38	40	37	47	49	49
Lumens	3,392	3,730	3,361	4,067	4,472	4,030	5,295	5,393	5,666
Efficacy (lm/W)	111	118	115	107	113	110	112	111	116
Color Accuracy (CRI)	81	80	82	81	80	82	81	81	81

Performance data is based on test performed at 120V.

Specifications

UL Listing:

Suitable for damp locations

LEDs:

Long-life, surface-mounted, discreet LEDs

Lifespan:

50,000-hour LED lifespan based on IES LM-80 results and TM-21 calculations

Drivers:

Class 2, Constant Current, 50/60Hz, 120-277V, 2kV surge protection

Dimming:

0-10V dimmable driver, standard (down to 10%)

Ambient Temperature:

Suitable for use in -20°C (-4°F) to 40°C (104°F)

Housing:

Plastic frame & galvanized steel back housing

Mounting:

For drop ceilings, standard integral clips secure the fixture to t-bars and prevent t-system separation. Compatible with RMKPANEL for other recessed applications and SMKPANEL for surface applications.

Lens:

Frosted Polystyrene

Green Technology:

Mercury and UV free. RoHS-compliant components.

Ordering Information

*Must order in case quantity increments. See product spec sheet for exact increments.

Product	Size	Wattage	Color Temp	Voltage	Lighting Controls
T34	2x4 2ft x 4ft 2x2 2ft x 2ft	50 50W (2x4) 40 40W (2x4, 2x2) 30 30W (2x4, 2x2) 20 20W (2x2)	Blank 5000K N 4000K YN 3500K	/D10 120-277Vac	Blank No options /LC Lightcloud

For the latest product literature,
download the rabdrive app

Get the app



Follow us



RAB[®]

Learn more:

rablighting.com • lightcloud.com

RAB is continually improving our products. Specifications may change without notice.
The designs of RAB fixtures are protected under U.S. and international intellectual property laws.