

PROJECT: _____

DATE: _____

TYPE: _____

PREPARED BY: _____



KEY FEATURES

- **Impact resistant**, can handle demanding construction site environments
- Omnidirectional light distribution
- Lightweight design with high output
- **6FT US cord+plug, linkable up to 600W Max**
- IP64 water and dust resistant
- **6kV surge protection** built in
- **50,000-Hour** lifespan
- **120V**
- **5-Year, No-Compromise Warranty**

LED Temporary Work Light



PERFORMANCE

Catalog Number	Equivalency	Input Wattage	Lumen	Efficacy lm/W	Color Temperature	CRI	L70 Lifespan
TEMP-60-850	250W HID	60W	7200	110	5000K	80	50,000
TEMP-100-850	400W HID	100W	12000	110	5000K	80	50,000
TEMP-150-850	600W HID	150W	18000	110	5000K	80	50,000

TECHNICAL SPECIFICATIONS

CONSTRUCTION

Product Type
HID

Bulb Shape
Temporary Work Light

Enclosure Material
Polycarbonate

Enclosure Finish
Construction Orange

Base Type
US Plug, 6ft cord

Beam Angle
360°

ELECTRICAL

THD
<20%

Power Factor
>0.9

Input Voltage
120V

Operating Frequency
60Hz

Operating Temperature
-30°C to 60°C

Note
All values are typical (tolerance +/- 10%)

INSTALLATION METHOD

6ft US 18AWG gauge cord and 3 prong plug

TECHNICAL SPECIFICATIONS (CONT.)

COMPLIANCE

Safety Listing

UL listed

Environment/Fixture Rating

Damp / Open

FCC

Complies with Part 15 of the FCC Rules.

RoHS

Mercury and UV free. RoHS-compliant components.

IP Rating

IP64

OTHER

Warranty


RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish.

RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

DIMENSIONS


TEMP 60W

Weight: 2.8 lbs

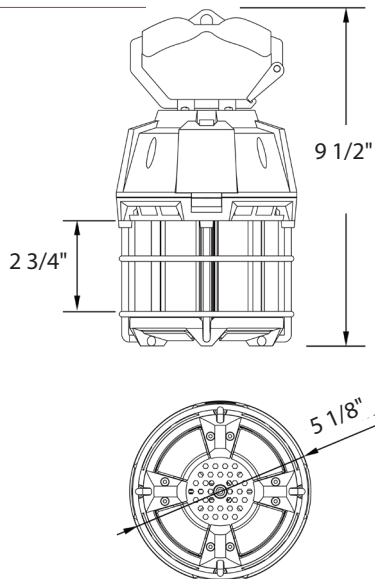


TEMP 100W

Weight: 4.3 lbs

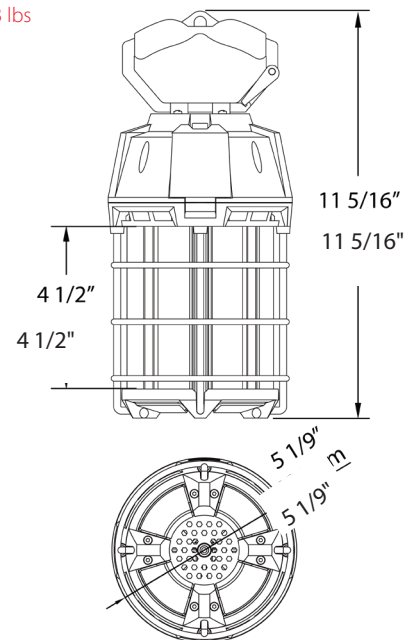

TEMP 150W

Weight: 3.7 lbs

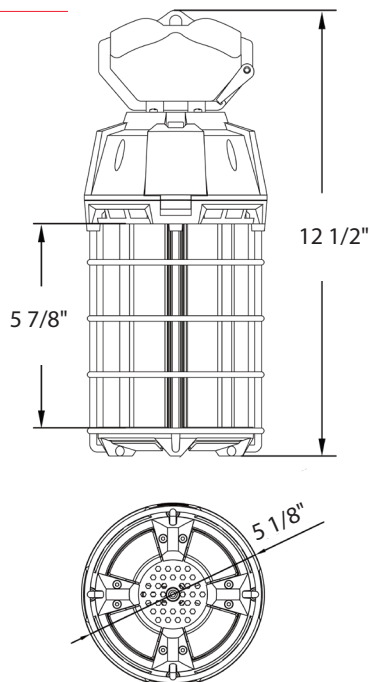

ORDERING INFO

Catalog Number	Model Number (DLC/Energy Star)	UPC	Case Pack
TEMP-60-850	H10040(TEMP-60-850)	019813908434	4
TEMP-100-850	H10041(TEMP-100-850)	019813908441	4
TEMP-150-850	H10042(TEMP-150-850)	019813908458	4

ORDERING MATRIX

Family	Wattage	CRI/Color Temp
TEMP	60 60W 100 100W 150 50W	850 80 CRI, 5000K