

Ultra economy that
gets the job done right.

W34TM

At RAB, lowest price still means highest standards.

RAB | Outdoor

W34™

- Available in 6 lumen packages
(replaces up to 400W MH; see performance on back page):
Small – 3,600 lm and 4,100 lm
Medium – 6,600 lm, 8,600 lm or 10,900 lm
Large – 18,100 lm
- Integrated 0-10V dimming
- Available with photocell or microwave occupancy sensor
- Lightcloud®-enabled models offered
- 50,000-Hour LED lifespan



RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.




Save even more with utility rebates. W34 models are DLC listed.



Optimized to deliver value.

Products in the W34 family combine the open-face look of traditional wall packs with a cost-efficient design that streamlines the replacement cycle of outdated or inoperable fixtures. You get exactly what you need to get the job done right...all at a fantastic price point.

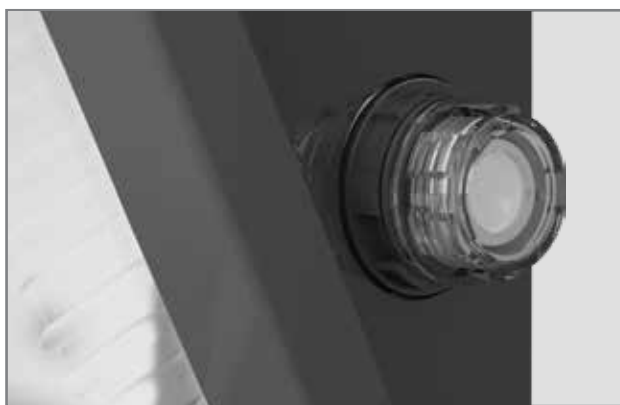

Light and motion sensing.

Button photocell and microwave occupancy sensor accessories are available as factory-installed options to provide additional energy savings by turning lights on only when you need them.



Simple, powerful lighting control.

All models are available with factory-installed Lightcloud integration, for use with our commercial, wireless lighting control system and service.

Specifications

UL Listing:

Suitable for wet locations. Suitable for mounting within 4 feet of the ground

LEDs:

Long-life, high-efficacy, surface-mount LEDs

Lifespan:

50,000-hour LED lifespan based on IES LM-80 and TM-21 calculations

Drivers:

(30L): Constant Current, Class 2, 120-277V, 50/60Hz, 120V: 0.25A, 208V: 0.15A, 240V: 0.13A, 277V: 0.12A

Constant Current, Class 2, 480V, 50/60Hz, 480V: 0.07A

(35L): Constant Current, Class 2, 120-277V, 50/60Hz, 120V: 0.29A, 208V: 0.16A, 240V: 0.14A, 277V: 0.13A

Constant Current, Class 2, 480V, 50/60Hz, 480V: 0.08A

(55L): Constant Current, Class 2, 120-277V, 50/60Hz, 120V: 0.45A, 208V: 0.24A, 240V: 0.21A, 277V: 0.19A

Constant Current, Class 2, 480V, 50/60Hz, 480V: 0.11A

(70L): Constant Current, Class 2, 120-277V, 50/60Hz, 20V: 0.58A, 208V: 0.34A, 240V: 0.29A, 277V: 0.25A

Constant Current, Class 2, 480V, 50/60Hz, 480V: 0.15A

(90L): Constant Current, Class 2, 120-277V, 50/60Hz, 120V: 0.73A, 208V: 0.42A, 240V: 0.36A, 277V: 0.32A

Constant Current, Class 2, 480V, 50/60Hz, 480V: 0.18A

(150L): Constant Current, Class 1, 120-277V, 50/60Hz, 120V: 1.17A, 208V: 0.67A, 240V: 0.58A, 277V: 0.52A

Constant Current, Class 2, 480V, 50/60Hz, 480V: 0.30A

0-10V Dimming (Standard):

Driver includes dimming control wiring for 0-10V dimming systems. Requires separate 0-10V DC dimming circuit. Dims as low as 10%.

Color Uniformity:

RAB's range of CCT (Correlated Color Temperature) follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

Housing:

Die-cast aluminum

Lens:

Glass

Reflector:

Specular aluminum

Cold Weather Starting:

Minimum starting temperature is -40°C (-40°F)

Maximum Ambient Temperature:

Suitable for use in 40°C (104°F)

Mounting:

Die-cast backbox with four (4) conduit entry points and knockout pattern for junction box or direct wall mounting. Hinged door for easy re-assembly.

Green Technology:

Mercury and UV free. RoHS-compliant components.

Finish:

Formulated for high durability and long-lasting color

5 Yr Limited Warranty:


The RAB 5-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Buy American Act Compliance:


RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

Dimensions & Weights

W34-30L/35L Weight: 6.8 lbs

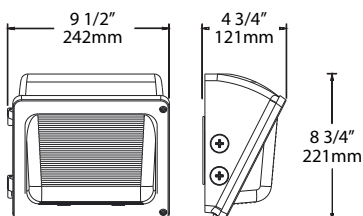

W34-55L/70L/90L Weight: 10.8 lbs

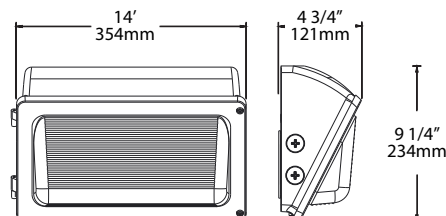

W34-150L Weight: 13.3 lbs

