

Take energy savings to the next level.

The ultra-low-profile LED flat panel is now available in a high-efficacy series.



EZPAN™ HE

RAB | Indoor

Edge-Lit LED Panels



RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

- Ultra efficient, up to 140 lm/W, reducing energy costs by up to 80%
- Perfect for shallow plenums
- Even and diffused illumination, ideal for spaces where glare-free lighting is required
- Offered in three sizes and four wattages: 1x4 (12W, 23W and 30W), 2x2 (12W*, 23W and 30W) and 2x4 (23W, 30W and 46W) **The 2x2 12W is not DLC listed*
- 0-10V dimmable standard
- Battery backup option available
- Available with factory-installed Lightcloud®




Plenty of models to choose from.

The EZPAN HE is available in the same form factors as the standard EZPAN series: 1x4, 2x2 and 2x4. Each size is offered in 3 different power packages.




Installs are a cinch.

An NEC-compliant junction box with flying leads makes wiring as simple as twisting a few wire nuts, and integral T-bar clips secure EZPAN HE to standard T-bar systems.

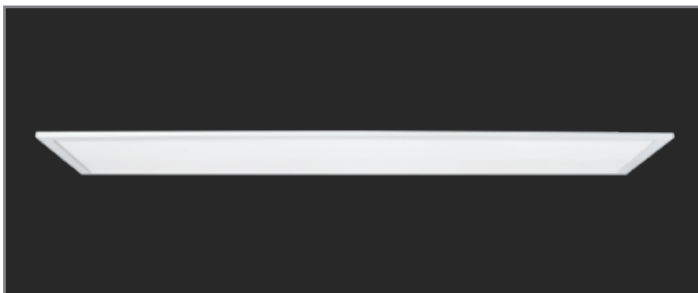

It's OK to be shallow.

With a height just under 2", the EZPAN HE family is an ideal solution for shallow plenums.

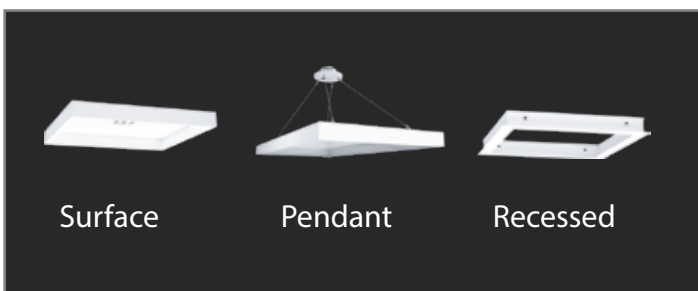


Maximized versatility.

Three EZPAN HE mounting kits cover all application needs: surface, pendant and recessed mounting.

Performance

2 x 4 (46W) - 5000K: 6001 lumens, 132 lm/W	4000K: 6150 lumens, 132 lm/W	3500K: 6009 lumens, 133 lm/W	3000K: 5920 lumens, 131 lm/W
2 x 4 (30W) - 5000K: 4123 lumens, 136 lm/W	4000K: 4133 lumens, 136 lm/W	3500K: 4000 lumens, 131 lm/W	3000K: 4020 lumens, 131 lm/W
2 x 4 (23W) - 5000K: 3137 lumens, 129 lm/W	4000K: 3227 lumens, 132 lm/W	3500K: 3088 lumens, 128 lm/W	3000K: 3274 lumens, 134 lm/W
2 x 2 (30W) - 5000K: 4122 lumens, 133 lm/W	4000K: 4136 lumens, 133 lm/W	3500K: 4093 lumens, 134 lm/W	3000K: 4147 lumens, 134 lm/W
2 x 2 (23W) - 5000K: 3247 lumens, 132 lm/W	4000K: 3227 lumens, 132 lm/W	3500K: 3071 lumens, 127 lm/W	3000K: 3345 lumens, 137 lm/W
2 x 2 (12W) - 5000K: 1757 lumens, 133 lm/W	4000K: 1769 lumens, 134 lm/W	3500K: 1658 lumens, 129 lm/W	3000K: 1608 lumens, 127 lm/W
1 x 4 (30W) - 5000K: 4030 lumens, 135 lm/W	4000K: 4173 lumens, 136 lm/W	3500K: 3936 lumens, 136 lm/W	3000K: 3912 lumens, 133 lm/W
1 x 4 (23W) - 5000K: 3120 lumens, 130 lm/W	4000K: 3324 lumens, 135 lm/W	3500K: 3094 lumens, 130 lm/W	3000K: 3147 lumens, 130 lm/W
1 x 4 (12W) - 5000K: 1642 lumens, 134 lm/W	4000K: 1708 lumens, 137 lm/W	3500K: 1586 lumens, 127 lm/W	3000K: 1687 lumens, 132 lm/W

Dimensions and Weights

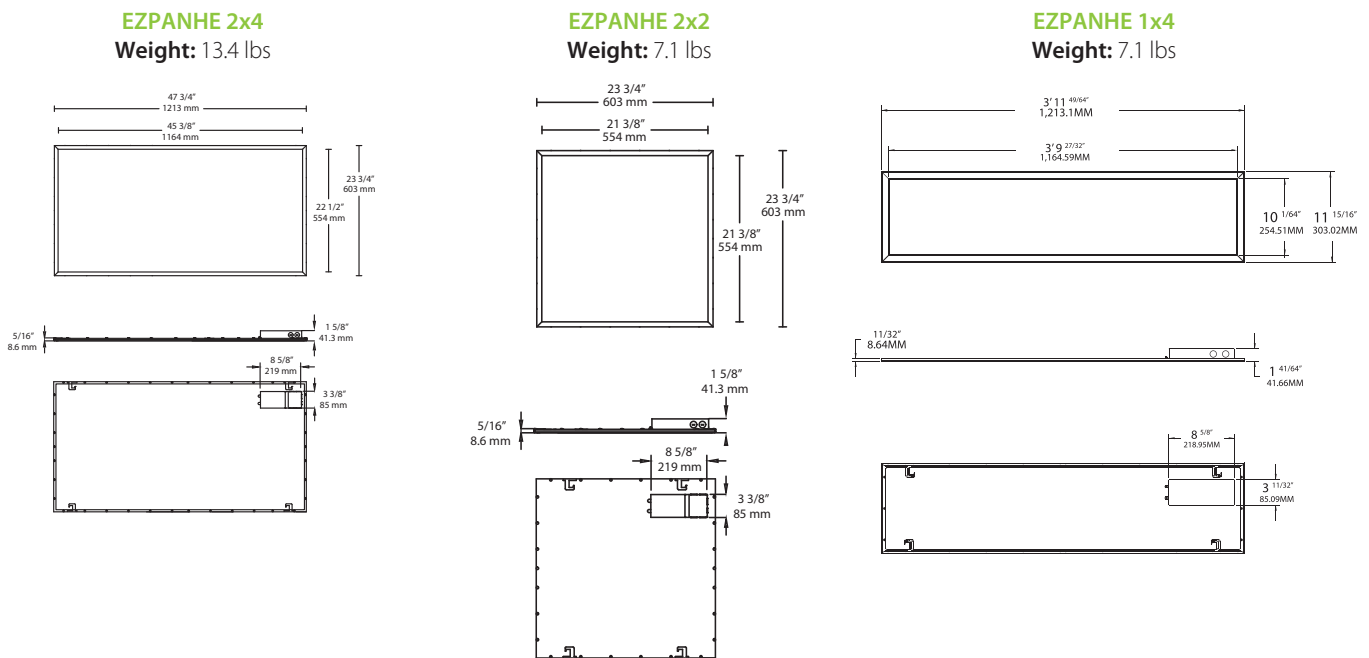

EZPAN™ HE Specifications

UL Listing: Suitable for damp locations

IC Rating: Suitable for insulated ceilings

LEDs: Long-life, high efficacy, surface-mount LEDs

Daisy chaining: Using standard Type MC cable.

46W (2x4): 0.1A @ 120V; 0.06A @ 208V; 0.05A @ 240V; 0.04A @ 277V
30W (2x4): 0.25A @ 120V; 0.14A @ 208V; 0.13A @ 240V; 0.11A @ 277V
23W (2x4): 0.19A @ 120V; 0.11A @ 208V; 0.1A @ 240V; 0.08A @ 277V
30W (2x2): 0.25A @ 120V; 0.14A @ 208V; 0.13A @ 240V; 0.11A @ 277V
23W (2x2): 0.19A @ 120V; 0.11A @ 208V; 0.1A @ 240V; 0.08A @ 277V
12W (2x2): 0.1A @ 120V; 0.06A @ 208V; 0.05A @ 240V; 0.04A @ 277V
30W (1x4): 0.25A @ 120V; 0.14A @ 208V; 0.13A @ 240V; 0.11A @ 277V
23W (1x4): 0.19A @ 120V; 0.11A @ 208V; 0.1A @ 240V; 0.08A @ 277V
12W (1x4): 0.1A @ 120V; 0.06A @ 208V; 0.05A @ 240V; 0.04A @ 277V

Lifespan: At 10 hours daily use, EZPAN HE is rated to last over 16 years

Dimming: 0-10V dimmable driver, standard

Ambient Temperature: Suitable for use in up to 40°C ambient temperatures

Housing: Lightweight aluminum housing, steel pan and junction box

Lens: Diffuse polystyrene

Installation: Standard integral T-bar clips secure the fixture to T-bars and prevent T-system separation.


Finish: Our environmentally friendly polyester powder coatings are formulated for high-durability and long-lasting color, and contain no VOC or toxic heavy metals.

Green Technology: Mercury and UV-free. RoHS-compliant components.

Mounting Accessory Kits


Surface Mount Kits

- SMKEZPAN2X2 - 2x2 Surface Mount Kit
- SMKEZPAN2X4 - 2x4 Surface Mount Kit
- SMKEZPAN1X4 - 1x4 Surface Mount Kit

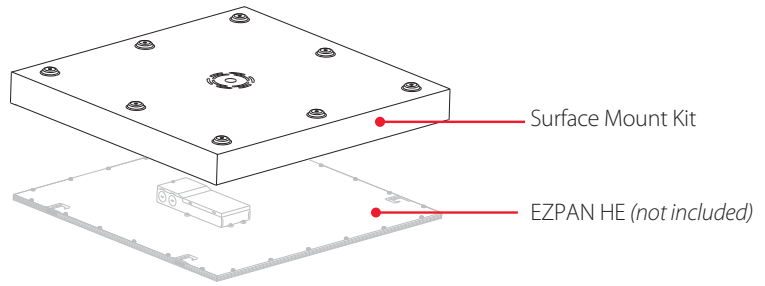


Pendant Mount Kits

- PMKEZPAN2X2 - 2x2 Pendant Mount Kit
- PMKEZPAN2X4 - 2x4 Pendant Mount Kit
- PMKEZPAN1X4 - 1x4 Pendant Mount Kit

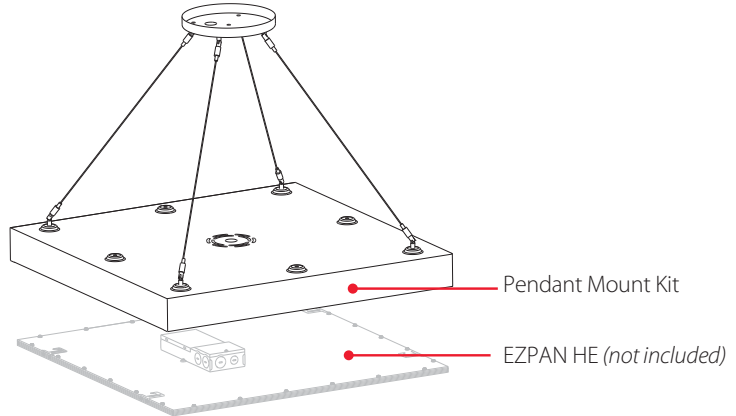

Recessed Drywall Mounting Kits

- RMKPANEL2X2 - 2x2 Recessed Mounting Kit
- RMKPANEL2X4 - 2x4 Recessed Mounting Kit
- RMKPANEL1X4 - 1x4 Recessed Mounting Kit

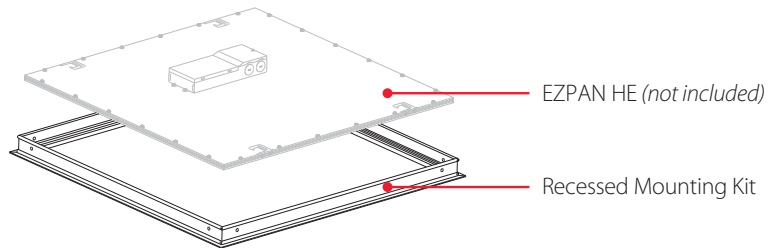

Ordering Information

Product Family	Size	Wattage	Color Temp.	Dimming (standard)	Control Options	Other Options
EZPANHE				/D10		
2X4	2' x 4'	46	46W (2' x 4')	/D10	Blank	Blank
2X2	2' x 2'	30	30W (2'x4', 2'x2', 1'x4')	0-10V Dimming	None	None
1X4	1' x 4'	23	23W (2'x4', 2'x 2', 1'x4')		/LC Lightcloud Controller	/E2 Battery Backup
		12	12W (2'x2', 1'x 4')			
			Blank			
			N			
			YN			
			Y			
			5000K			
			4000K			
			3500K			
			3000K			

Product Family

SMKEZPAN

Surface Mount Kit

Size

2X4 2'x4'

2X2 2'x2'

1X4 1'x4'

Product Family

PMKEZPAN

Pendant Mount Kit

Size

2X4 2'x4'

2X2 2'x2'

1X4 1'x4'

Product Family

RMKPANEL

Recessed Mount Kit

Size

2X4 2'x4'

2X2 2'x2'

1X4 1'x4'

*The 2'x2'12W is not DLC listed.