



UPC: 192552014519

Weight: 0.0 lbs

Project:

Type:

Prepared By:

Date:

Technical Specifications

Performance

Product Type:

A-Line

Input Wattage:

23W

Lumens:

2,550lm

Efficacy:

110.9lm/W

L70 Lifespan:

25,000-Hour LED lifespan based on IES LM-70 results

Wattage Equivalency:

150W Incandescent / Metal Halide or High Pressure Sodium

Compliance

UL Listed:

Suitable for damp locations

Enclosed Fixtures:

Suitable for use in enclosed fixtures

LED Characteristics

Color Temperature:

3000K

Color Accuracy (CRI):

>80 CRI

Beam Angle:

230°

Electrical

Power Factor:

>0.9

Dimmable:

Yes

Operating Temperature:

-20°C to 40°C

Input Voltage:

120V

Operating Frequency:

60 Hz

Construction

Bulb Shape:

A21

Enclosure Material:

Die Cast Aluminum

Installation

Base Type:

E26 Edison

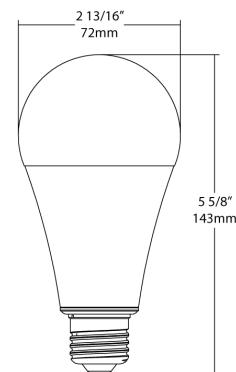
Other

3-Year, No-Compromise Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of three (3) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Case and Pallet Dimensions

	QTY	LENGTH (in)	WIDTH (in)	HEIGHT (in)
CASE	12	12.8	9.6	6
PALLET	0	0	0	0

Dimension**Features**

Replacement for High-output Incandescent or lower wattage metal halide and high pressure sodium lamps

Rated for use in enclosed and open fixtures in dry or damp locations

Ideal for post top, bollards, and outdoor corridor lighting

Suitable for use in a base-up or base-down position

Ordering Matrix

Family	Wattage	Base Type	CRI/Color Temp	Dimmable
A21	-	23	-	E26
			-	830
			-	DIM 120V
	9 = 9W	E26 = E26 Base	830 = 80 CRI, 3000K	DIM = Dimmable
	10 = 10W	GU24 = GU24 Base	827 = 80 CRI, 2700K	DIM 120V = Dimmable
	13 = 13W		840 = 80 CRI, 4000K	
	15 = 15W		850 = 80 CRI, 5000K	
	16 = 16W		835 = 80 CRI, 3500K	
	5 = 5W			
	23 = 23W			