



Economical linear high bay delivers versatility and ultra-high efficiency. Available in 8 wattages and three sizes, for mounting heights ranging from 15 to 60 feet. Patent pending, retractable design reduces volume by up to 60% to save valuable shelf and storage space.

Color: White

Weight: 23.6 lbs

Project:

Type:

Prepared By:

Date:

Driver Info

Type	Constant Current
120V	N/A
208V	N/A
240V	N/A
277V	N/A
Input Watts	340W

LED Info

Watts	360W
Color Temp	5000K (Cool)
Color Accuracy	83 CRI
L70 Lifespan	100,000 Hours
Lumens	50,696 lm
Efficacy	149.1

Technical Specifications

Compliance

UL Listed:

Suitable for damp locations

IESNA LM-79 & LM-80 Testing:

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA lm-79 and lm-80.

DLC Listed:

This product is listed by Design Lights Consortium (DLC) as an ultra-efficient premium product that qualifies for the highest tier of rebates from DLC Member Utilities. Designed to meet DLC 5.1 requirements.

DLC Product Code: PKEILEOZ

Electrical

Driver:

Class 2, Constant Current, 50/60 Hz, 480V: 0.74A

THD:

8.96% at 480V

Power Factor:

98% at 480V

Performance

Lifespan:

100,000-Hour LED lifespan based on IESlm-80 results and TM-21 calculations

LED Characteristics

LEDs:

Multi-chip, high-output, long-life LEDs


Construction

Operating Temperature:

-4°F(-20°C) to 122°F (50°C)



Dimensions

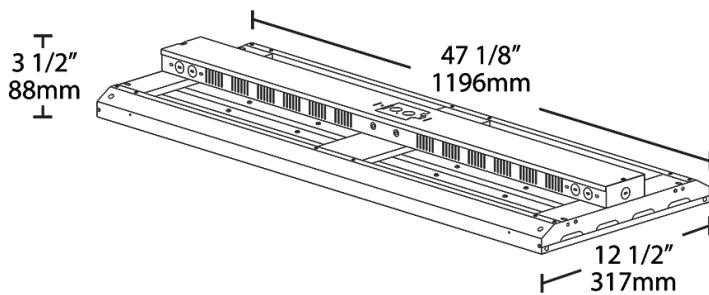

Features

High efficiency. Low price.
Ideal for industrial warehouse spaces
100,000 hour LED lifespan
5-Year, limited warranty

Ordering Matrix

Family	Length	Wattage	Color Temp	Driver	Control Options	Emergency Options	Other Options
ARBAY	4	-	360		/480		/SP10
	4 = 4 ft	315 = 315W 360 = 360W	Blank = 5000K Cool N = 4000K Neutral	Blank = 120-277V, 0-10V Dimming /480 = 480V, 0-10V Dimming	/LCS = 120-277V, Lightcloud Motion Sensor /LC = Lightcloud /PIR = 120-277V, Passive Infrared Occupancy Sensor Blank = No Options	Blank = No Options /E2 = 120-277V, Battery	Blank = No Options /SP10 = 10kV Surge Protection /8C = 8' Cord only /8CP = 8' Cord, Straight Blade Plug 120V, NEMA 5-15P /8CP2 = 8' Cord, Straight Blade Plug 277V, NEMA 7-15P /8CPT = 8' Cord, Twistlock Plug 120V, NEMA L5-15P /8CPT2 = 8' Cord, Twistlock Plug 277V, NEMA L7-15P /8CPT4 = 8' Cord, Twistlock Plug 480V, NEMA L8-20P