



Color: Black trim specular silver cone

Weight: 2.0 lbs

Project:

Type:

Prepared By:

Date:

Driver Info

Type	Constant Current
120V	0.24A
208V	0.14A
240V	0.13A
277V	0.12A
Input Watts	29.1W

LED Info

Watts	26W
Color Temp	3000K (Warm)
Color Accuracy	90 CRI
L70 Lifespan	100,000 Hours
Lumens	2,020 lm
Efficacy	69.4 lm/W

Technical Specifications**Compliance****UL Listed:**

Suitable for wet locations covered ceiling

Energy Star Approved:

ENERGY STAR® Version 2.0 Certified

LED Characteristics**LED:**

Long-life, high-output LED module. Binned for natural white light to match incandescent and 3-step MacAdam Ellipse consistency.

Performance**Lifespan:**

100,000-Hour LED lifespan based on IESlm-80 results and TM-21 calculations

Construction**Ambient Temperature:**


Suitable for use in up to 104°F (40°C)

Electrical**Driver:**

ELV, 0-10V and TRIAC Dimming, Constant Current, Class 2, 120V-277V, 50/60Hz, Power Factor 98%, THD ≤ 20%



Dimensions

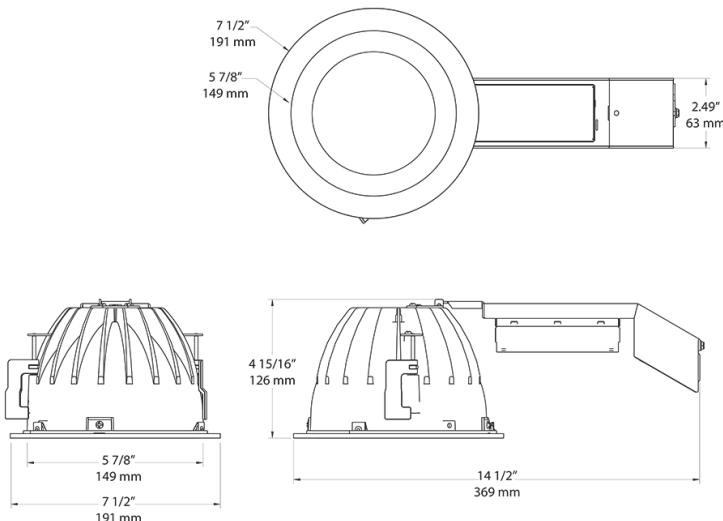

Features

High performance, high efficiency alternative to incandescent lighting
 Integrated ceiling clamps make installation fast and secure for ceiling up to 1 1/4" thick
 Nanostructure lens eliminates "hot spots" providing smooth and efficient light
 Low-profile design allows for installation in ceilings with limited space
 Absolute White™ natural light output

Ordering Matrix

Family	Size	Shape	Wattage	Driver Option	Beam Spread	Color Temp	CRI	Cone Color	Trim Color
RDLED	6	R	26	D	50	Y	HC	S	B
	4 = 4" 6 = 6"	S = Square R = Round	20 = 20W 26 = 26W (6" only) 12 = 12W (4" only)	D = Universal Dimming	80 = 80° W = Wall Washer 50 = 50°	YY = 2700K Residential Warm Y = 3000K Warm YN = 3500K Warm Neutral N = 4000K Neutral	Blank = 82 CRI HC = 92 CRI	B = Black M = Matte Silver S = Specular W = White	B = Black S = Silver W = White