

INSTRUCTIONS


TX17 TRUNNION KIT INSTALLATION



RAB Lighting is committed to creating high-quality, affordable, well-designed and energy-efficient LED lighting and controls that make it easy for electricians to install and end users to save energy. We'd love to hear your comments. Please call the Marketing Department at 888-RAB-1000 or email: marketing@rablighting.com



TX17-105-140



TX17-205-330-450

IMPORTANT

READ CAREFULLY BEFORE INSTALLING FIXTURE. RETAIN THESE INSTRUCTIONS FOR FUTURE REFERENCE.



RAB fixtures must be wired in accordance with the National Electrical Code and all applicable local codes. Proper grounding is required for safety. THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.

WARNING: Make certain power is OFF before installing or maintaining fixture.

INSTALLATION

Notice: Adjustment may be made $\pm 180^\circ$.

1. Feed **Housing** wires through **Bracket A**. Secure **Bracket A** to **Housing** with (2) **Screws** (*provided*) as shown in **Fig. 1** using a M6 Allen Wrench.
2. Feed **Housing** wires through **Bracket B** and secure to **Bracket A** with (2) **Screws** (*provided*) as shown in **Fig. 2** using an M8 Allen Wrench.
3. Wire the **Fixture** leads to supply wires using UL listed wire connectors according to NEC and local codes. Be careful not to pinch wires. **WARNING: To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.**
4. To adjust the **Housing** angle loosen (2) **Screws** on **Bracket B**, set to desired angle.
5. Tighten (2) **Screws** to set angle.

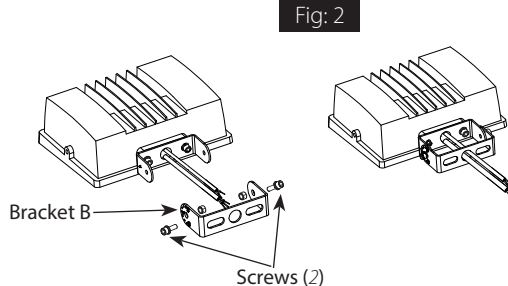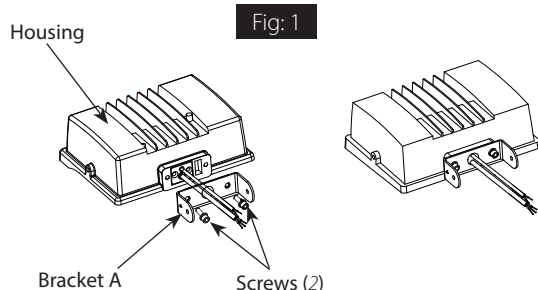

Note: These instructions do not cover all details or variations in equipment nor do they provide for every possible situation during installation, operation or maintenance.



Easy Answers

© 2021 RAB LIGHTING Inc.

TX17 105-140-205-330-450W
Trunnion Kit - IN-0921
P-100077

rablighting.com
Visit our website for product info

Tech Help Line
Call our experts: 888 722-1000

e-mail
Answered promptly - sales@rablighting.com

Free Lighting Layouts
Answered online or by request