


### Lightcloud



# Lightcloud Blue | Lamps

All Lightcloud Blue-enabled lamps will instantly connect to the system's app via Bluetooth Mesh, getting you up and running in minutes.

### Features

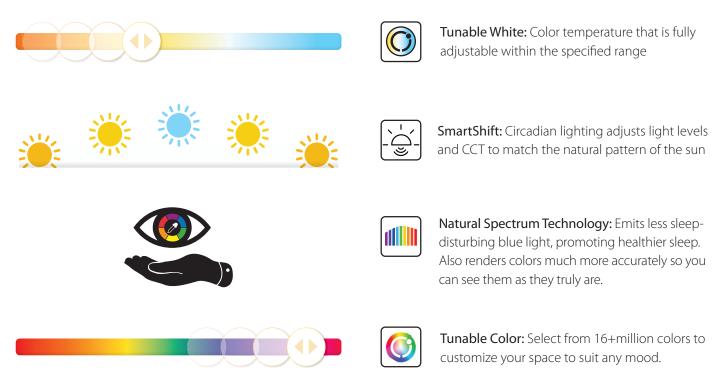

# A19

The most commonly used lamp shape, this A19 is engineered with Lightcloud Blue capability. Designed with durable plastic construction and a frosted lens, this A19 produces smooth, diffuse light with highest color rendering accuracy. It can be used in closed or open fixtures, in dry or damp locations, and carries RAB's 3-year, no-compromise warranty.

Dimr

CRI: 9

Lifes


 $\bigcirc$ 

CRI: 90+

	ľ	

#### LCBA19-10-E26-9TW-SS-NS

Replaces: 60W Incandescent
Wattage: 10W
Voltage: 120V
Base: E26 Edison
<b>CCT:</b> 2700 - 6500K



### A19 RGB

#### LCBA19-9-E26-9RGB-SS

Replaces: 60W Incandescen	t
Wattage: 8W	
Voltage: 120V	
Base: E26 Edison	
<b>CCT:</b> 2200 - 6500K and 16+ million colors	

ming: Down to 5%	
90+	
pan: 25,000 Hours	
S	


With over 16 million colors to choose from, these RGB A19 lamps are ready to set your lighting to suit any mood. Tunable white also lets you adjust CCT, all from your mobile app. Designed with durable plastic construction and a frosted lens, this A19 produces smooth, diffuse light and high color rendering. It can be used in closed or open fixtures, in dry or damp locations, and carries RAB's 3-year, no-compromise warranty.

### **BR30**

This energy-efficient replacement for halogen and incandescent reflector lamps is designed with durable plastic to reduce breakage and a frosted lens for smooth, diffuse light. It is rated for use in closed and open fixtures, in dry or damp locations, and carries RAB's 3-year, no-compromise warranty.

#### LCBBR30-10-E26-9TW-SS-NS

Replaces: 65W Halogen
Wattage: 10W
Voltage: 120V
Base: E26 Edison
CCT: 2700 - 6500K



### BR30 RGB

#### LCBBR30-7-E26-9RGB-SS

Replaces: 6	5W Incandescent
-------------	-----------------

Wattage: 7W			
Voltage: 120V			

Base: E26 Edison

CCT: 2200 - 6500K and 16+ million colors



With over 16 million colors to choose from, these RGB BR30s are ready to set your lighting to suit any mood. Tunable white also lets you adjust CCT, all from your mobile app. Designed with durable plastic construction and a frosted lens, it produces smooth, diffuse light and high color rendering. It can be used in closed or open fixtures, in dry or damp locations, and carries RAB's 3-year, no-compromise warranty.

### **Decorative Filament**

Filament-style LED lamps offer a unique traditional appearance for decorative and mood-sensitive needs. Models are available in A19, ST19, G25 and B11 shapes for the most-often-used applications. They are rated for use in closed and open fixtures, in dry, damp, or wet locations, and carry RAB's 3-year, no-compromise warranty.



Base: E26 Edison CCT: 2200 - 4500K

Voltage: 120V



## Wattage: 6W Voltage: 120V

Base: E26 Edison

CCT: 2200 - 4500K

CRI: 90+ Lifespan: 15,000 Hours















### NSE NSF <u>CER</u>TIFIED

T8 Tubes only

# **T8** Linear Tubes

These popular 4 ft linear tubes are a direct replacement for fluorescent lamps and are available in both Type A (Ballast Compatible) and Type B (Ballast Bypass) styles.

The Type A installs directly to the existing ballast for guick "plug and play" use. The Type B's integral driver allows the lamp to be wired directly to line voltage and accepts single-ended or double-ended wiring, making it super flexible for various applications. Both are built from durable plastic, are NSF Listed and carry RAB's 5-year, nocompromise warranty.

RAB is continually improving our products. Specifications may change without notice. The designs of RAB fixtures are protected under U.S. and international intellectual property laws.

#### LCBT8-14-48P-8TW-DIR-SS


Type: Ballast Compatible (A) Replaces: 25/28/32W Fluorescent Wattage: 14W **CRI**: >80 CCT: 2700 - 6500K

Voltage: Ballast Dependent Base: G13 Dimming: Down to 5% Lifespan: 50,000 Hours

#### LCBT8-18-48P-8TW-SD-BYP-SS

Type: Ballast Bypass (B) Single- or Double-Ended Replaces: 32W Fluorescent Wattage: 18W CRI: >80 CCT: 2700 - 6500K

#### Voltage: 120-277V Base: G13 Dimming: Down to 5% Lifespan: 50,000 Hours



©2022 RAB Lighting, Inc.

 $\mathbf{D}\mathbf{\Delta}$ 





RGB BR30 only

ENERGY

STAR

A19s, BR30s, and

decoratives only