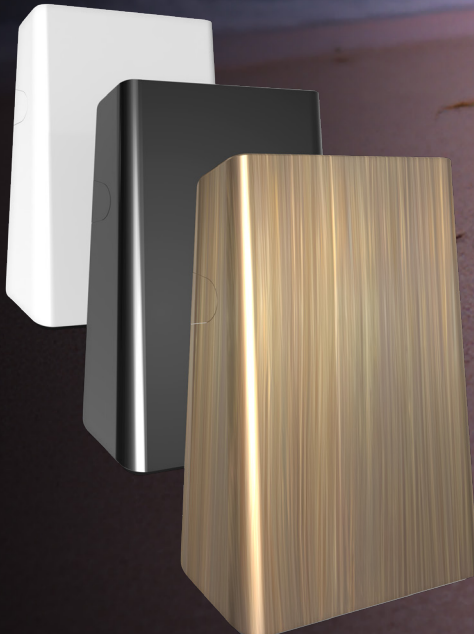


The RAB logo is displayed in a bold, red, sans-serif font.The words "SLIM AMBER" are written in a white, sans-serif font inside a dark rectangular box.Three rectangular wall packs are shown in a row: white, black, and a brushed metal finish. They are positioned on the left side of the image.

SLIM wall packs in turtle-friendly amber!

Ecologically responsible lighting.

Turtle-friendly lighting.

Light sources can disorient nesting sea turtles and their hatchlings, leading them away from the water. They can also interrupt biological clocks and instincts to sleep and feed. SLIM amber wall packs minimize the risk of disruption to wildlife.





FEATURE PAGE



100K-HOUR
LED LIFESPAN



120-277V



0-10V



10-YEAR
NO-COMPROMISE
WARRANTY

RAB's warranty is
subject to all terms
and conditions found at
rablighting.com/warranty

Meets Certified Wildlife Lighting standards.

1. Low output: Field-adjustable wattage lets you keep lumen output at the bare minimum for what is needed.
2. Fully cutoff, fully shielded: The SLIM amber is a full-cutoff fixture that minimizes light pollution and puts light only where it's needed.
3. Long wavelength: SLIM amber emits long-wavelength light (585-595nm) that is less distracting to wildlife. RAB uses true amber LEDs, unlike the phosphor-converted LEDs which still produce blue wavelength light that can be confusing to sea turtles that rely on moonlight to guide them.

Sustainable brass.

SLIM amber is available in 100% non-rusting, non-corroding brass that's ideal for waterfront locations, withstands rough weather conditions, and will naturally patina over time. Brass is also a sustainable and recyclable material that helps us reduce our overall environmental impact.



DarkSky certified for sea turtles.

All SLIM amber models are certified by DarkSky as a Sea Turtle Sensitive Luminaire which must include shielding and color spectra tuned to protect specific species habitats.



Ordering Matrix

Product Family	Wattage	Wavelength	Finish	Driver
SLIM		YA		
	Blank	26/18/12W	YA	Amber
			Blank W BR	Bronze White Solid Brass
				Blank
				120-277V, 0-10V Dimming