

# VAN34, Field-Adjustable Canopy Light



VAN34 (W/DROP LENS)



VAN34 (W/FLAT LENS)



PROJECT: \_\_\_\_\_

DATE: \_\_\_\_\_

TYPE: \_\_\_\_\_

PREPARED BY: \_\_\_\_\_

VAN34 (W/FROSTED DROP LENS)



VAN34 (W/FROSTED FLAT LENS)



## KEY FEATURES

- Available in one size & three models with following wattages:  
VAN34-30 : 30/25/20W  
VAN34-60 : 60/50/40W  
VAN34-90 : 90/80/70W
- Field-adjustable CCT (3000K/4000K/5000K)
- Built-in on/off photo
- Lightcloud Blue motionsensor option available
- Battery backup option available
- Impact-resistant, vandal-resistant
- Ideal for canopy applications
- Suitable for parking garages
- 0-10V dimming standard
- UL listed for wet locations
- 5-year, limited warranty

3-Way adjustable, ultra-economy canopy light



## PERFORMANCE

VAN34-30	3000K	4000K	5000K	3000K	4000K	5000K	3000K	4000K	5000K
WATTAGE	30W			20W			10W		
INPUT WATTS	31.2W	30.4W	31.2W	20.6W	20.1W	20.6W	11.6W	11.3W	11.6W
LUMENS	4,363	4,588	4,526	2,916	3,066	3,025	1,584	1,666	1,643
EFFICACY	139.8	150.9	145.1	141.6	152.5	146.8	136.6	147.4	141.6
CRI	83	85	84	84	85	84	84	85	84
VOLTAGE RATINGS	120-277V			120-277V			120-277V		

VAN34-30	3000K	4000K	5000K	3000K	4000K	5000K	3000K	4000K	5000K
WATTAGE	30W			20W			10W		
INPUT WATTS	31.4W	30.7W	31.4W	21.2W	20.7W	21.2W	9.4W	9.2W	9.4W
LUMENS	4,442	4,696	4,625	2,996	3,167	3,119	1,206	1,275	1,256
EFFICACY	141.5	153.0	147.3	141.3	153.0	147.1	128.3	138.6	133.6
CRI	83	85	83	84	85	83	84	85	83
VOLTAGE RATINGS	480V			480V			480V		

# VAN34, Field-Adjustable Canopy Light



## PERFORMANCE

VAN34-30F	3000K	4000K	5000K	3000K	4000K	5000K	3000K	4000K	5000K
WATTAGE	30W			20W			10W		
INPUT WATTS	31.2W	30.4W	31.2W	20.6W	20.1W	20.6W	11.6W	11.3W	11.6W
LUMENS	4,494	4,734	4,671	3,015	3,176	3,134	1,636	1,723	1,700
EFFICACY	144.0	155.7	149.7	146.4	158.0	152.1	141.0	152.5	146.6
CRI	83	85	83	83	85	83	83	85	83
VOLTAGE RATINGS	120-277V			120-277V			120-277V		

VAN34-30F	3000K	4000K	5000K	3000K	4000K	5000K	3000K	4000K	5000K
WATTAGE	30W			20W			10W		
INPUT WATTS	31.4W	30.7W	31.4W	21.2W	20.7W	21.2W	9.4W	9.2W	9.4W
LUMENS	4,585	4,837	4,767	3,070	3,239	3,192	1,240	1,308	1,289
EFFICACY	146.0	157.6	151.8	144.8	156.5	150.6	131.9	142.2	137.1
CRI	83	85	83	83	85	83	84	85	83
VOLTAGE RATINGS	480V			480V			480V		

VAN34-30FFR	3000K	4000K	5000K	3000K	4000K	5000K	3000K	4000K	5000K
WATTAGE	30W			20W			10W		
INPUT WATTS	31.2W	30.4W	31.2W	20.6W	20.1W	20.6W	11.6W	11.3W	11.6W
LUMENS	3,975	4,187	4,134	2,658	2,800	2,764	1,442	1,519	1,500
EFFICACY	127.4	137.7	132.5	129.0	139.3	134.2	124.3	134.4	129.3
CRI	84	86	85	85	86	85	85	86	85
VOLTAGE RATINGS	120-277V			120-277V			120-277V		

VAN34-30FFR	3000K	4000K	5000K	3000K	4000K	5000K	3000K	4000K	5000K
WATTAGE	30W			20W			10W		
INPUT WATTS	31.4W	30.7W	31.4W	21.2W	20.7W	21.2W	9.4W	9.2W	9.4W
LUMENS	4,043	4,276	4,220	2,712	2,868	2,831	1,094	1,157	1,142
EFFICACY	128.8	139.3	134.4	127.9	138.6	133.5	116.4	125.8	121.5
CRI	84	86	84	85	86	84	85	86	84
VOLTAGE RATINGS	480V			480V			480V		

VAN34-30FR	3000K	4000K	5000K	3000K	4000K	5000K	3000K	4000K	5000K
WATTAGE	30W			20W			10W		
INPUT WATTS	31.2W	30.4W	31.2W	20.6W	20.1W	20.6W	11.6W	11.3W	11.6W
LUMENS	3,964	4,186	4,133	2,658	2,807	2,771	1,444	1,525	1,506
EFFICACY	127.1	137.7	132.5	129.0	139.7	134.5	124.5	135.0	129.8
CRI	84	86	84	84	86	84	85	86	84
VOLTAGE RATINGS	120-277V			120-277V			120-277V		

VAN34-30FR	3000K	4000K	5000K	3000K	4000K	5000K	3000K	4000K	5000K
WATTAGE	30W			20W			10W		
INPUT WATTS	31.4W	30.7W	31.4W	21.2W	20.7W	21.2W	9.4W	9.2W	9.4W
LUMENS	4,040	4,277	4,217	2,711	2,870	2,830	1,095	1,159	1,143
EFFICACY	128.7	139.3	134.3	127.9	138.6	133.5	116.5	126.0	121.6
CRI	84	86	84	84	86	84	85	86	84
VOLTAGE RATINGS	480V			480V			480V		

# VAN34, Field-Adjustable Canopy Light



## PERFORMANCE

VAN34-60	3000K	4000K	5000K	3000K	4000K	5000K	3000K	4000K	5000K
WATTAGE	60W			50W			40W		
INPUT WATTS	61.1W	59.3W	61.1W	49W	47.6W	49W	39.7W	38.5W	39.7W
LUMENS	8,772	9,266	9,120	7,205	7,611	7,491	5,965	6,301	6,202
EFFICACY	143.6	156.3	149.3	147.0	159.9	152.9	150.3	163.7	156.2
CRI	83	85	84	83	85	84	84	85	84
VOLTAGE RATINGS	120-277V			120-277V			120-277V		

VAN34-60	3000K	4000K	5000K	3000K	4000K	5000K	3000K	4000K	5000K
WATTAGE	60W			50W			40W		
INPUT WATTS	61.2W	59.5W	61.3W	51.4W	50W	51.5W	41.9W	40.7W	42W
LUMENS	8,924	9,443	9,273	7,574	8,014	7,870	6,241	6,604	6,485
EFFICACY	145.8	158.7	151.3	147.4	160.3	152.8	148.9	162.3	154.4
CRI	83	85	84	83	85	84	83	85	84
VOLTAGE RATINGS	480V			480V			480V		

VAN34-60F	3000K	4000K	5000K	3000K	4000K	5000K	3000K	4000K	5000K
WATTAGE	60W			50W			40W		
INPUT WATTS	61.1W	59.3W	61.1W	49.1W	47.7W	49.1W	39.8W	38.6W	39.8W
LUMENS	8,647	9,145	9,011	7,155	7,567	7,456	5,929	6,270	6,179
EFFICACY	141.5	154.2	147.5	145.7	158.6	151.9	149.0	162.4	155.3
CRI	83	85	84	83	85	84	83	85	84
VOLTAGE RATINGS	120-277V			120-277V			120-277V		

VAN34-60F	3000K	4000K	5000K	3000K	4000K	5000K	3000K	4000K	5000K
WATTAGE	60W			50W			40W		
INPUT WATTS	61.2W	59.5W	61.3W	51.4W	50W	51.5W	41.9W	40.7W	42W
LUMENS	8,802	9,311	9,152	7,474	7,906	7,771	6,159	6,515	6,404
EFFICACY	143.8	156.5	149.3	145.4	158.1	150.9	147.0	160.1	152.5
CRI	83	85	84	83	85	84	83	85	84
VOLTAGE RATINGS	480V			480V			480V		

VAN34-60FFR	3000K	4000K	5000K	3000K	4000K	5000K	3000K	4000K	5000K
WATTAGE	60W			50W			40W		
INPUT WATTS	61.1W	59.3W	61.1W	49W	47.6W	49W	39.8W	38.6W	39.8W
LUMENS	8,003	8,459	8,334	6,585	6,960	6,857	5,457	5,768	5,683
EFFICACY	131.0	142.6	136.4	134.4	146.2	139.9	137.1	149.4	142.8
CRI	84	86	85	84	86	85	85	86	85
VOLTAGE RATINGS	120-277V			120-277V			120-277V		

VAN34-60FFR	3000K	4000K	5000K	3000K	4000K	5000K	3000K	4000K	5000K
WATTAGE	60W			50W			40W		
INPUT WATTS	61.2W	59.5W	61.3W	51.4W	50W	51.5W	41.9W	40.7W	42W
LUMENS	8,112	8,588	8,438	6,884	7,288	7,161	5,671	6,004	5,899
EFFICACY	132.5	144.3	137.7	133.9	145.8	139.0	135.3	147.5	140.5
CRI	84	86	85	84	86	85	84	86	85
VOLTAGE RATINGS	480V			480V			480V		

# VAN34, Field-Adjustable Canopy Light



## PERFORMANCE

VAN34-60FR	3000K	4000K	5000K	3000K	4000K	5000K	3000K	4000K	5000K
WATTAGE	60W			50W			40W		
INPUT WATTS	61.1W	59.3W	61.1W	49W	47.6W	49W	39.7W	38.5W	39.7W
LUMENS	7,998	8,463	8,334	6,590	6,973	6,867	5,452	5,769	5,681
EFFICACY	130.9	142.7	136.4	134.5	146.5	140.1	137.3	149.8	143.1
CRI	84	86	85	84	86	85	84	86	85
VOLTAGE RATINGS	120-277V			120-277V			120-277V		

VAN34-60FR	3000K	4000K	5000K	3000K	4000K	5000K	3000K	4000K	5000K
WATTAGE	60W			50W			40W		
INPUT WATTS	61.2W	59.5W	61.3W	51.4W	50W	51.5W	41.9W	40.7W	42W
LUMENS	8,114	8,594	8,453	6,903	7,311	7,191	5,683	6,019	5,920
EFFICACY	132.6	144.4	137.9	134.3	146.2	139.6	135.6	147.9	141.0
CRI	84	86	85	84	86	85	84	86	85
VOLTAGE RATINGS	480V			480V			480V		

VAN34-90	3000K	4000K	5000K	3000K	4000K	5000K	3000K	4000K	5000K
WATTAGE	90W			80W			70W		
INPUT WATTS	91W	88W	91W	79.7W	77.1W	79.7W	68.9W	66.6W	68.9W
LUMENS	12,776	13,588	13,240	11,393	12,117	11,807	10,077	10,717	10,443
EFFICACY	140.4	154.4	145.5	142.9	157.2	148.1	146.3	160.9	151.6
CRI	83	85	84	83	85	84	83	85	84
VOLTAGE RATINGS	120-277V			120-277V			120-277V		

VAN34-90	3000K	4000K	5000K	3000K	4000K	5000K	3000K	4000K	5000K
WATTAGE	90W			80W			70W		
INPUT WATTS	90.7W	87.9W	90.8W	79.2W	76.8W	79.3W	71W	68.8W	71.1W
LUMENS	12,910	13,789	13,431	11,454	12,234	11,916	10,400	11,108	10,820
EFFICACY	142.3	156.9	147.9	144.6	159.3	150.3	146.5	161.5	152.2
CRI	83	85	84	83	85	84	83	85	84
VOLTAGE RATINGS	480V			480V			480V		

VAN34-90F	3000K	4000K	5000K	3000K	4000K	5000K	3000K	4000K	5000K
WATTAGE	90W			80W			70W		
INPUT WATTS	91W	88W	91W	79.7W	77.1W	79.7W	68.9W	66.6W	68.9W
LUMENS	12,617	13,451	13,131	11,305	12,052	11,766	10,002	10,663	10,409
EFFICACY	138.6	152.9	144.3	141.8	156.3	147.6	145.2	160.1	151.1
CRI	83	85	84	83	85	84	83	85	84
VOLTAGE RATINGS	120-277V			120-277V			120-277V		

VAN34-90F	3000K	4000K	5000K	3000K	4000K	5000K	3000K	4000K	5000K
WATTAGE	90W			80W			70W		
INPUT WATTS	90.7W	87.9W	90.8W	79.2W	76.8W	79.3W	71W	68.8W	71.1W
LUMENS	12,854	13,705	13,352	11,386	12,140	11,827	10,347	11,032	10,748
EFFICACY	141.7	155.9	147.0	143.8	158.1	149.1	145.7	160.3	151.2
CRI	83	86	84	83	86	84	83	86	84
VOLTAGE RATINGS	480V			480V			480V		

# VAN34, Field-Adjustable Canopy Light



## PERFORMANCE

VAN34-90FFR	3000K	4000K	5000K	3000K	4000K	5000K	3000K	4000K	5000K
WATTAGE	90W			80W			70W		
INPUT WATTS	90.9W	87.9W	90.9W	79.7W	77.1W	79.7W	68.9W	66.6W	68.9W
LUMENS	11,542	12,285	11,984	10,331	10,996	10,727	9,158	9,748	9,509
EFFICACY	127.0	139.8	131.8	129.6	142.6	134.6	132.9	146.4	138.0
CRI	84	86	85	84	86	85	84	86	85
VOLTAGE RATINGS	120-277V			120-277V			120-277V		

VAN34-90FFR	3000K	4000K	5000K	3000K	4000K	5000K	3000K	4000K	5000K
WATTAGE	90W			80W			70W		
INPUT WATTS	90.7W	87.9W	90.8W	79.2W	76.8W	79.3W	71W	68.8W	71.1W
LUMENS	11,808	12,576	12,251	10,426	11,104	10,817	9,470	10,086	9,825
EFFICACY	130.2	143.1	134.9	131.6	144.6	136.4	133.4	146.6	138.2
CRI	84	87	85	84	87	85	84	87	85
VOLTAGE RATINGS	480V			480V			480V		

VAN34-90FR	3000K	4000K	5000K	3000K	4000K	5000K	3000K	4000K	5000K
WATTAGE	90W			80W			70W		
INPUT WATTS	91W	87.9W	91W	79.7W	77W	79.7W	68.9W	66.7W	68.9W
LUMENS	11,599	12,351	12,056	10,361	11,033	10,769	9,162	9,756	9,523
EFFICACY	127.5	140.5	132.5	130.0	143.3	135.1	133.0	146.3	138.2
CRI	84	86	85	84	86	85	84	86	85
VOLTAGE RATINGS	120-277V			120-277V			120-277V		

VAN34-90FR	3000K	4000K	5000K	3000K	4000K	5000K	3000K	4000K	5000K
WATTAGE	90W			80W			70W		
INPUT WATTS	90.7W	87.9W	90.8W	79.2W	76.8W	79.3W	71W	68.8W	71.1W
LUMENS	11,753	12,554	12,232	10,421	11,130	10,845	9,475	10,120	9,860
EFFICACY	129.6	142.8	134.7	131.6	144.9	136.8	133.5	147.1	138.7
CRI	84	86	85	84	86	85	84	86	85
VOLTAGE RATINGS	480V			480V			480V		

## TECHNICAL SPECIFICATIONS

### COMPLIANCE

#### UL Listed

UL listed for wet locations

#### IP Rating

Ingress protection rating of IP65 for dust and water

#### DLC Listed

This product family is listed with the DesignLights Consortium (DLC). Individual SKUs within this family may carry either a DLC Standard or DLC Premium qualification. Please refer to the individual product specification sheet or the DLC Qualified Products List (QPL) at [designlights.org](http://designlights.org) to confirm the qualification status of a specific SKU prior to specification or purchase.

### CONSTRUCTION (CONTINUED)

Cold Weather starting

Minimum starting temperature is -40°C (-40°F)

Maximum Ambient Temperature

Suitable for use in up to 40°C (104°F)

Cold Weather starting for Battery Backup

Minimum starting temperature is 0°C (32°F)

Maximum Ambient Temperature for Battery Backup

Suitable for use in up to 60°C (140°F)

Housing

Precision die-cast aluminum

Mounting

Retrofit mounting plates for ceiling mounting

Lens

Polycarbonate lens

Reflector

Aluminum

Gasket

Ethylene Propylene Diene Monomer (EPDM) gasket

IP Ratings

Ingress Protection rating of IP65 for dust and water

Green Technology

Mercury and UV free. RoHS-compliant components.

Finish

Formulated for high durability and long lasting color

### LED CHARACTERISTICS

#### LEDS

Long-life, high-efficacy, surface-mount LEDs

### FIELD ADJUSTABLE

**CCT Selectable:** 3000/4000/5000k (factory default 4000K)

#### Selectable wattages:

VAN34-30 : 30/20/10W (factory default: 30W)

VAN34-60 : 60/50/40W (factory default: 60W)

VAN34-90 : 90/80/70W (factory default: 90W)

**Integrated Daylight Photocell:** Factory default: Off

### ELECTRICAL

#### Drivers:

Constant Current, Class 1, 120-277V, 50/60 Hz

#### VAN34-30:

**30W:** 120V: 0.25A, 208V: 0.15A, 240V: 0.13A, 277V: 0.10A

**20W:** 120V: 0.17A, 208V: 0.10A, 240V: 0.09A, 277V: 0.08A

**10W:** 120V: 0.09A, 208V: 0.06A, 240V: 0.06A, 277V: 0.06A

#### VAN34-60:

**60W:** 120V: 0.50A, 208V: 0.30A, 240V: 0.27A, 277V: 0.23A

**50W:** 120V: 0.41A, 208V: 0.24A, 240V: 0.21A, 277V: 0.19A

**40W:** 120V: 0.3A, 208V: 0.20A, 240V: 0.18A, 277V: 0.16A

#### VAN34-90:

**90W:** 120V: 0.76A, 208V: 0.45A, 240V: 0.39A, 277V: 0.34A

**80W:** 120V: 0.67A, 208V: 0.39A, 240V: 0.35A, 277V: 0.30A

**70W:** 120V: 0.58A, 208V: 0.34A, 240V: 0.30A, 277V: 0.27A

#### Drivers:

Constant Current, Class 1, 480V, 50/60 Hz

#### VAN34-30:

**30W:** 480V: 0.07A

**20W:** 480V: 0.05A

**10W:** 480V: 0.04A

#### VAN34-60:

**60W:** 480V: 0.13A

**50W:** 480V: 0.16A

**40W:** 480V: 0.10A

#### VAN34-90:

**90W:** 480V: 0.21A

**80W:** 480V: 0.18A

**70W:** 480V: 0.17A

#### Dimming Driver:

Driver includes dimming control wiring for 0-10V dimming systems. Requires separate 0-10V DC dimming circuit. Dims down to 10%.

#### Battery Backup:

Battery backup will operate the fixture 90 minutes if power fails. Wired for 120-277V

#### Emergency Light Loss Factor:

VAN34-30 / VAN34-30/480: 0.08%

VAN34-60 / VAN34-60/480: 0.08%

VAN34-90 / VAN34-90/480: 0.073%

#### Photocell

120-277V compatible, Integrated Button Photocell included.

#### Surge Protection

L/N: 4KV, L/N-PE: 6KV (VAN34-30 (120/277V))

L/N: 6KV, L/N-PE: 6KV

# VAN34, Field-Adjustable Canopy Light



## TECHNICAL SPECIFICATIONS

### OCCUPANCY SENSORS

Sensor Type: Integrated Microwave Sensor (MVS)

Input Voltage: 12VDC

Operating Frequency: 50/60Hz

Input Current: 30mA

Operating Temperature: -40°F to 140°F (-20°C to 60°C)

Max Mounting Height: 50 ft (MVS)

Detection Range: 50 ft. diameter mounted at 50 ft. (/MVS & /LCBS/MVS)

Daylight Sensing: The sensor will determine to trigger the light(s) on or not based on the daylight threshold level set.

#### Default Settings:

Motion Sensitivity: High

Brightness when triggered : 100%

Hold time: 20 minutes for all sensors

Standby to dim: 20%

Standby time: 1 minute

When vacant: Off

**Adjustable Settings:** Settings for Lightcloud Blue-enabled sensors can be adjusted using the mobile app. All other sensors will require MSR1 Remote to adjust the following sensor settings:

Standby to dim: 10%/20%/30%/50%

Standby time: 0s/10s/30s/1min/5min/10min/30min/60min/+∞

Daylight Threshold: 2Lux/10Lux/30Lux/50Lux/80Lux/120Lux/Disable

### OTHER

#### Warranty

The RAB 5-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).

#### Lifespan

100,000-hour LED lifespan based on IES LM-80 results and TM-21 calculations

# VAN34, Field-Adjustable Canopy Light



## WIRELESS NETWORK LIGHTING CONTROLS

Lightcloud products offer integrated network lighting control for a truly wireless solution that allows you to manage RAB's various compatible devices. With RAB's patented Rapid Provisioning technology, devices can be quickly and easily commissioned for residential and commercial applications. Each device can communicate with other devices in the mesh network. With two Lightcloud systems to choose from, it's easy to implement controls anywhere.




Learn more about Lightcloud wireless networked lighting controls.

Design Lights Consortium Network Lighting Controls:

- Interior Applications: N1XMLOEATB
- Exterior Applications: NHCZ2BIA17L

## Lightcloud®

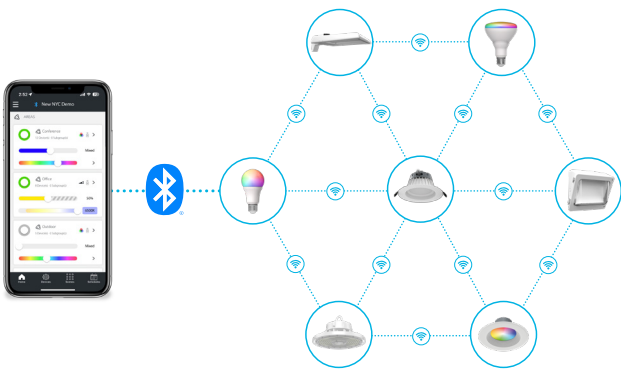

- Utilizes Bluetooth Mesh, eliminating the need for a Gateway or Hub
- Ideal for applications that need basic wireless control such as ON/OFF, dimming, color tuning, Schedules, and SmartShift
- Download the Lightcloud Blue mobile app for iOS or Android devices
- Add the XDIM/BRIDGE/LCB and LCGATEWAY to adopt premium Lightcloud Enterprise features

### SIMPLE SETUP

- 1** Download the app.
- 2** Connect product
- 3** Pair product to app.
- 4** Enjoy!

Learn more about [Lightcloud Blue](#). Visit the [Lightcloud Blue Resources](#) page for more information on how to use the system.

## Lightcloud®



- Utilizes a secure cellular and Zigbee mesh network that requires a Gateway or Hub (sold separately)
- Offers premium features like remote commissioning, demand response, BACnet integration, and more
- Download the Lightcloud Enterprise mobile app for iOS or Android devices

### SIMPLE SETUP

- 1** Download the app.
- 2** Complete the
- 3** Connect product
- 4** Contact RAB for Remote
- 5** Enjoy!

Learn more about [Lightcloud Enterprise](#). Visit the [Lightcloud Enterprise Resources](#) page for more information on how to use the system.


# VAN34, Field-Adjustable Canopy Light



## DIMENSIONS

### VAN34

Weighs: VAN34-30 5.06 lbs  
 VAN34-60: 6.05 lbs  
 VAN34-90: 6.16 lbs

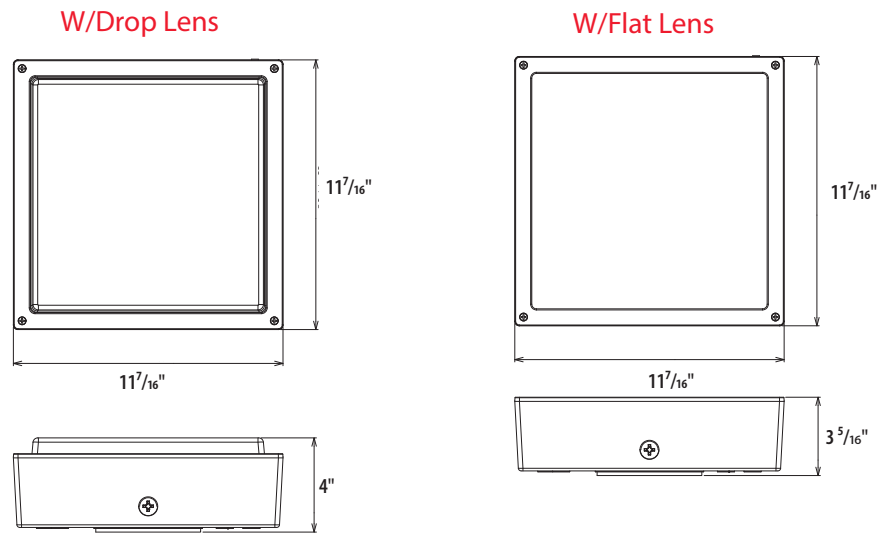

## ACCESSORIES

Image	SKU#	UPC	Description
	VANLED RETROPLATE G2	019813830469	RETROPLATE VANLED 14" x 14" 10W-75W BRONZE VAVE
	VANLED RETROPLATEW G2	019813830476	RETROPLATE VANLED 14" X 14" 10W-75W WHITE VAVE
	LFVAN34A	192552045070	DROP LENS & DOOR FRAME KIT W/ SCREWS VAN34 BZ
	LFVAN34A-FR	192552045094	DROP LENS & DOOR FRAME KIT W/ SCREWS VAN34 FROSTED BZ
	LFVAN34FA	192552045117	FLAT LENS & DOOR FRAME KIT W/ SCREWS VAN34 BZ
	LFVAN34FA-FR	192552045131	FLAT LENS & DOOR FRAME KIT W/ SCREWS VAN34 FROSTED BZ
	LFVAN34FW	192552045124	FLAT LENS & DOOR FRAME KIT W/ SCREWS VAN34 WH
	LFVAN34FW-FR	192552045148	FLAT LENS & DOOR FRAME KIT W/ SCREWS VAN34 FROSTED WH
	LFVAN34W	192552045087	DROP LENS & DOOR FRAME KIT W/ SCREWS VAN34 WH
	LFVAN34W-FR	192552045100	DROP LENS & DOOR FRAME KIT W/ SCREWS VAN34 FROSTED WH
	MSR1	192552026055	MULTI SENSOR REMOTE

# VAN34, Field-Adjustable Canopy Light



## ORDERING MATRIX

### VAN34

Family	Wattage	Color Temperature	Optics	Finish	Driver	Controls	Battery Backup
VAN34							
30	30/20/10W	Blank	Blank	Drop	Blank	120-	Blank
60	60/50/40W	3000/4000/5000K	Lens	W	277V,	0-10V Dimming	On/Off Pho-
90	90/80/70W	CCT Adjustable	F	Flat Lens	/480V	480V,	Lightcloud Con-
							Blank /E
							None Battery Backup*

\* Battery backup option only available on 120/277V models